


Diamond Tread Plate

- Great for expansion joint cover, bulkhead saddle, or anywhere extra width and strength are required
- This item is made to order and is non-returnable and non-cancelable once fabricated
- 1/8" thick bright-finish aluminum
- Edges beveled unless otherwise specified
- Furnished undrilled, although custom drilling is available to your detail
- #10 x 1 1/2" zinc plated wood screws furnished
- Minimum width 2"

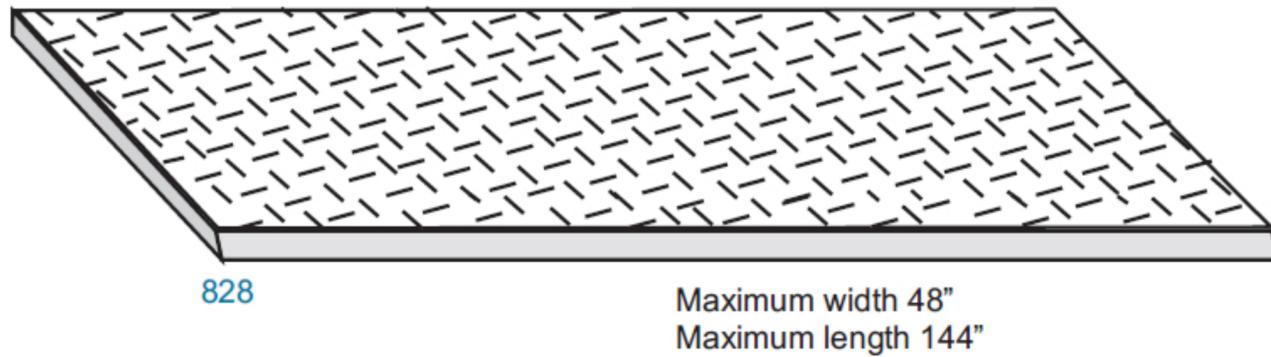

Safety Tread Plates

- Non-slip abrasive tread material is a blend of carborundum and aluminum oxide, bonded and locked into the aluminum tread base
- Treads exceed ADA requirements for coefficient of friction tested to ASTM F609 and MIL-D-23003A
The coefficient of friction for NGP safety tread plates is .94 dry and .86 wet
- Furnished undrilled, unless a template is provided
- May be used with edge parts (page T31)
- Treads can NOT be ripped to narrower width or welded together
- Safety treads are manufactured to order and are non-cancelable and non-returnable

