

**Type** • Cylindrical lock

- Certifications**
- Conforms to ANSI/NHMA A156.2, Series 4000, Grade 1
 - UL listed, 3hr fire-rating
 - UL 10C Positive Pressure Rating
 - Meets ADA requirements
 - 5 Year limited warranty

- Door Thickness**
- 1 $\frac{3}{8}$ –2" (35–51mm)
 - SFIC Models: 1 $\frac{9}{16}$ –2" (40–51mm)

- Handing** • Non handed

- Backset**
- 2 $\frac{3}{4}$ " (70 mm)
 - 2 $\frac{3}{8}$ " (60 mm) – available
 - 3 $\frac{3}{4}$ " (95 mm) – available
 - 5" (127 mm) – available

- Spring Latch**
- Stainless steel, $\frac{1}{2}$ " (12.7 mm) throw
 - Deadlatch, $\frac{3}{4}$ " (19 mm) throw – available

- Faceplate**
- Mortise type, square corners
 - 1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (28.5x57 mm)

- Strike** • ASA Strike

- Trim**
- Solid, pressure cast lever
 - Brass rose
 - Rose diameter: 3 $\frac{9}{16}$ " (90 mm)

- Chassis**
- Concealed mounting plate and screws
 - Fixed security posts
 - Lever clutch release

- Preparation**
- Cross bore: 2 $\frac{1}{8}$ " (54 mm)
 - Edge bore: 1" (25.4 mm)

- Cylinder**
- Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable
 - Small format interchangeable core (SFIC) model – available*

Other keyways and keying options available, including CX5 high security. () BEST® and CX5® cores sold separately.*

- | | | |
|------------------|------------------|-----------------------|
| Functions | 10 Passage | 70 Classroom |
| | 17 Dummy, single | 75 Classroom security |
| | 42 Privacy | 80 Storeroom |
| | 53 Entry | 82 Institution |

- Lever Styles** L–Standard return

- Finish** 26D–Satin chrome

Other finishes available by special order


GX1L	53	-	26D
SERIES	FUNCTION		FINISH

SELECTION GUIDE

SERIES	FUNCTION	FINISH ¹	/CASE
GX1 L	10 Passage	26D	6
GX1 L	17 Dummy, single	26D	6
GX1 L	42 Privacy	26D	6
GX1 L	53 Entry ➡	26D	6
GX1 L	53IC Entry SFIC, less core ➡	26D	6
GX1 L	70 Classroom ➡	26D	6
GX1 L	70IC Classroom SFIC, less core ➡	26D	6
GX1 L	75 Classroom security ➡	26D	6
GX1 L	80 Storeroom ➡	26D	6
GX1 L	80IC Storeroom SFIC, less core ➡	26D	6
GX1 L	82 Institution / utility ➡	26D	6

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED.

➡ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

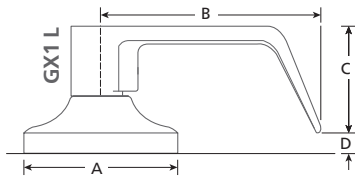

	A	B	C	D*
GX1 L	3 ⁹ / ₁₆ (90)	5 (127)	2 ⁵ / ₈ (66.7)	3 ³ / ₈ (10)

IN (MM)

(*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

PARTS & ACCESSORIES



9106
T-Strike, square corners:
1¹/₈ x 2³/₄ " (28.5 x 70 mm)



9106NH
T-Strike, no hole; square corners:
1¹/₈ x 2³/₄ " (28.5 x 70 mm)

ASA-T
ASA strike with adjustable tab
ASANH
ASA strike, no hole



9806
CX5 high security SFIC core, 6 pin, 0 bitted

9807
CX5 high security SFIC core, 7 pin, 0 bitted

CBI-BF6KD-26D
BEST® F type SFIC core, 6 pin, 0 bitted

CBI-BF7KD-26D
BEST® F type SFIC core, 7 pin, 0 bitted



GX1SL238
Passage latch: 2³/₈ " (60 mm) backset
1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate



GX1SL234
Passage latch: 2³/₄ " (70 mm) backset
1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate

GX1PL238
Privacy latch: 2³/₈ " (60 mm) backset
1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate

GX1PL234
Privacy latch: 2³/₄ " (70 mm) backset
1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate



GX1DL238
Deadlatch: 2³/₈ " (60) backset
1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate



GX1DL234
Deadlatch: 2³/₄ " (70 mm) backset
1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate



GX1DL234-34
Deadlatch: 2³/₄ " (70 mm) backset,
3/4 " (19 mm) throw, 1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate



GX1LE334
Backset extension to 3³/₄ " (95 mm); use with
2³/₈ " (60 mm) backset latch



GX1LE500
Backset extension to 5 " (127 mm); use with
2³/₄ " (70 mm) backset latch