

PARAMOUNT

22 SERIES

COMMERCIAL LOCKSETS

- Non-handed
 - For 1 3/8" (35mm) to 1 7/8" (48mm) door thickness
 - Standard backset 2 3/4" (70mm); optional 2 3/8" (60mm)
 - Latch with square corners faceplate
 - Standard ASA strike
 - Solid brass 6-pin tumbler cylinder
 - Standard Schlage "C" keyway
 - Rose cover conceals mounting screws
 - Easy installation, fits ANSI 115.2, 161 door prep
 - Wide variety of functions available
 - Conforms to ANSI A156.2 series 4000, Grade 2
 - 3 hour UL fire rating
 - 1 year mechanical limited warranty
-



CONFORMS TO ANSI
GRADE 2



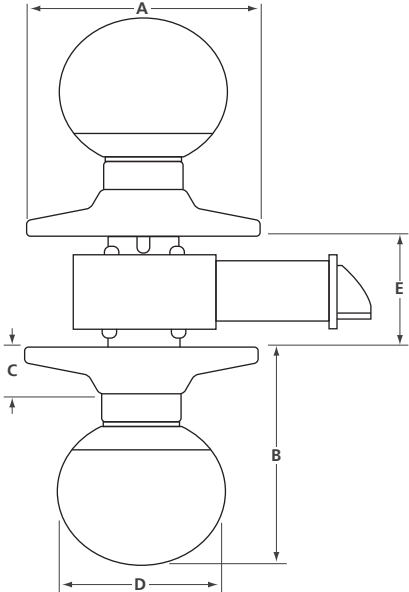
22 series standard duty locksets are recommended by door hardware specialists for use in multi-unit housing or standard commercial applications.

22 SERIES LOCKSETS

SPECIFICATION

All bored knobsets shall be 22 Series. Knobsets shall meet ANSI A156.2 Series 4000, Grade 2 specification requirements. The knobsets shall have 3 hour fire UL rating. The lock chassis shall be made of steel and zinc construction materials with corrosion resistance protection. The latch bolt shall be made of brass chrome plated material, with 1/2" (12.7mm) throw and deadlocking feature on keyed functions. The standard latch bolt backset shall be 2 3/4" (70mm) and optional 2 3/8" (60mm). The latch face plate shall be made of corrosion protected steel, 1 1/8" x 2 1/4" (28.5mm x 57.1mm) with square corners. The cylinder shall be solid brass with 6-pin tumbler and a standard Schlage "C" keyway.

SIZE CHART & SELECTION GUIDE

						MODEL NUMBER	FUNCTION	FINISH	QTY PER CASE	WEIGHT LBS / KG
22-B 2 15/16 (75.0) 2 5/8 to 3 (66 to 76.4) 21/32 (21.5) 2 3/16 (56.0) 1 3/8 to 1 7/8 (35.0 to 48)						22-B00	Dummy	3, 32D	50	29.9 / 13.6
						22-B10	Passage		20	45.0 / 20.4
						22-B40	Privacy		20	46.4 / 21.0
						22-B53	Entrance		20	48.0 / 21.8
						22-B53-LC	Entrance, less core		20	47.2 / 21.4
						22-B70	Classroom		20	47.3 / 21.5
						22-B70-LC	Classroom, less core		20	46.4 / 21.1
						22-B-72*	Communication		20	51.0 / 23.2
						22-B72-LC*	Communication, less core		20	43.5 / 19.7
						22-B80	Storeroom		20	50.2 / 22.8
						22-B80-LC	Storeroom, less core		20	48.0 / 21.8
						22-B82*	Institution or utility		20	53.8 / 24.4
						22-B82-LC*	Institution or utility, less core		20	47.3 / 21.5
						22-B89*	Exit		20	35.0 / 15.9

ORDERING EXAMPLE: **22-B** **53** **-LC** **-32D**
SERIES **FUNCTION** **OPTION** **FINISH**

PARTS & ACCESSORIES

STRIKE-T	T-type strike, 1 1/8" (29mm) x 2 3/4" (70mm)	SL234	2 3/4" (70mm) passage latch
ASA-T	ASA strike with adjustable tab	EXT5	Latch extension for 5" (127mm) backset
DL238	2 3/8" (60mm) deadlatch		
DL234	2 3/4" (70mm) deadlatch		
SL238	2 3/8" (60mm) passage latch		

STRIKE-T



ASA-T



DEADLATCH



SPRING LATCH



EXT5

