


PARAMOUNT

G1L SERIES HEAVY-DUTY COMMERCIAL LOCKSETS

- Non-handed
 - Standard backset 2 3/4" (70mm)
 - Standard solid brass 6-pin tumbler cylinder Schlage "C" keyway
 - Concealed mounting plate and screws
 - For doors 1 9/16" (40mm) to 2" (51mm) door thickness
 - Lockset has non-removable steel thru bolt mounting posts
 - Stainless steel 1/2" (13mm) deadlatch bolt throw
 - Standard 1 1/8" (29mm) x 2 1/4" (57mm) faceplate
 - Standard ASA 1 1/4" (32mm) x 4 7/8" (124mm) strike
 - Available in a variety of standard functions
 - Easy installation for new construction or retrofit
 - Fits ANSI A115.2, 161 door prep
 - Conforms to ANSI A156.2, Grade 1
 - 3 hour UL fire rating
 - 5 year mechanical limited warranty
-

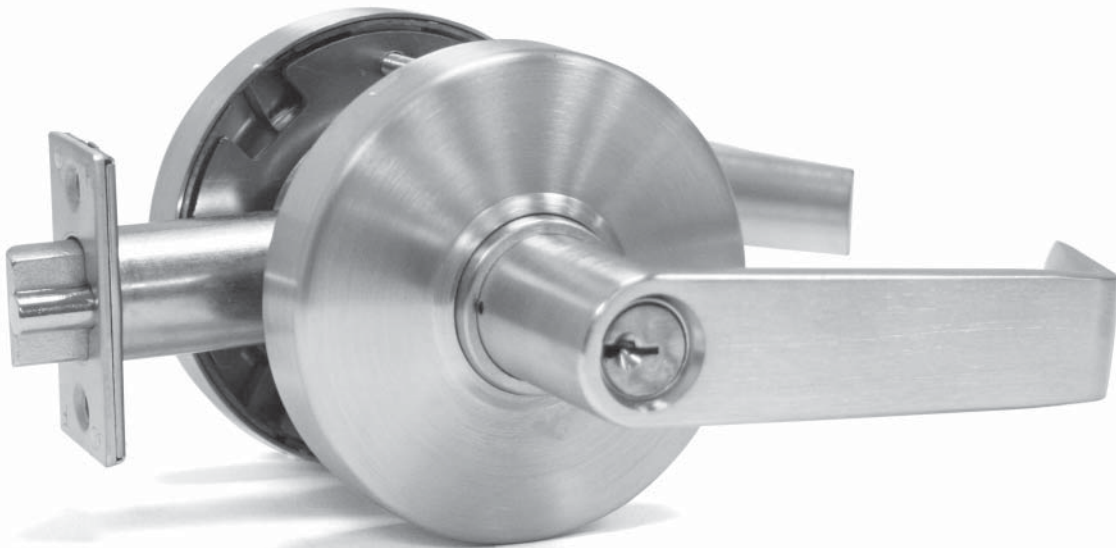

CONFORMS TO ANSI
GRADE 1



G1L series heavy-duty locksets are recommended by door hardware specialists for high traffic commercial doors. The G1L locksets are recognized for value while delivering lasting performance and security.

G1L SERIES LOCKSETS

SPECIFICATION

All bored lever locksets shall be G1L series. Locks shall meet the requirements of ANSI A156.2, Grade 1. G1L series lever locksets shall be adjustable for 1 9/16" (40mm) to 2" (51mm) door thickness. Locks shall fit standard 2 1/8" (55mm) cross bore (161 door prep). Latch bolt shall have standard 2 3/4" (70mm) backset, with 1/2" (13mm) latch throw and all locks shall be of heavy-duty construction and shall have a 3-hour UL listing for use on fire doors. Locks shall be non-handed and supplied with all necessary mounting fasteners.

SIZE CHART & SELECTION GUIDE

SERIES	A DIA	B*	C*	D	E
G1L	3 9/16 (90)	2 1/2 (67)	1/2 (13)	4 5/8 (117)	1 9/16 to 2 (40 to 52)

MODEL NUMBER	FUNCTION	FINISH	QTY PER CASE	WEIGHT LBS / KG
G1L 10	Passage	26D	10	53.0 / 24.0
G1L 40	Privacy			53.0 / 24.0
G1L 53	Entrance			54.0 / 24.7
G1L 70	Classroom			54.0 / 24.7
G1L 80	Storeroom			53.0 / 24.0

* Dimensions applicable for 1 3/4" (44mm) door thickness

ORDERING EXAMPLE:

G1L	10	-26D
SERIES	FUNCTION	FINISH

PARTS & ACCESSORIES

STRIKE-T	T-type strike, 1 1/8" (29mm) x 2 3/4" (70mm)
ASA-T	ASA strike with adjustable tab
G1DL234	2 3/4" (70mm) backset entry deadlatch
G1SL234	2 3/4" (70mm) backset passage spring latch

STRIKE-T	ASA-T	DEADLATCH	SPRING LATCH
			