


# HANDLES & PADDLES PARAMOUNT

## SECURITY PRODUCTS

### LEVER HANDLE


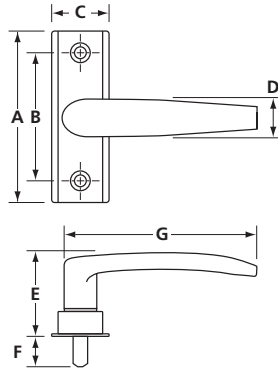


- Lever handle with cam plug
- Left hand or right hand, field reversible
- Sturdy and dependable aluminum alloy construction
- Hardened steel spindle and cam
- Mounting screws included
- Finish: aluminum (28) and duronodic (20D)

| MODEL NUMBER | A          | B           | C                 | D             | E                 | F               | G               | QTY PER CASE | WEIGHT LBS / KG |
|--------------|------------|-------------|-------------------|---------------|-------------------|-----------------|-----------------|--------------|-----------------|
| 0112         | 4<br>(102) | 3<br>(76.0) | 1 11/32<br>(34.0) | 7/8<br>(22.4) | 1 15/16<br>(48.8) | 23/32<br>(18.0) | 3 15/16<br>(97) | 50           | 39.6 / 18.0     |

ORDERING EXAMPLE: **0112** **-28**  
SERIES FINISH

### PUSH / PULL PADDLE

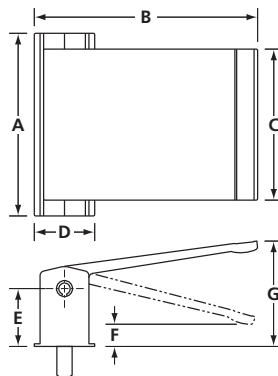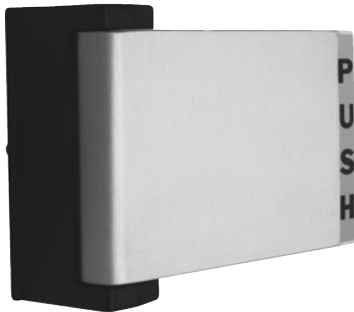

- PUSH / PULL paddle with cam plug
- Left hand or right hand, field reversible
- Zinc alloy base
- Extruded and anodized aluminum paddle
- Brass spindle bearing
- Spindle, cam and other critical parts are made of hardened steel
- 3" (76.2mm) center to center concealed mounting holes
- Spring (5590S) and extension kit (5590SPK) for 2 1/4" (57.2mm) door thickness are available
- Finish: aluminum (28) and duronodic (20D)

| MODEL NUMBER | A          | B                | C                 | D                 | E             | F              | G               | QTY PER CASE | WEIGHT LBS / KG |
|--------------|------------|------------------|-------------------|-------------------|---------------|----------------|-----------------|--------------|-----------------|
| 5590         | 4<br>(102) | 4 15/16<br>(126) | 3 11/32<br>(85.0) | 1 11/32<br>(34.0) | 1 3/8<br>(35) | 9/16<br>(14.0) | 2 3/8<br>(60.0) | 20           | 35.2 / 16.0     |

ORDERING EXAMPLE: **5590** **-28** **L**  
SERIES FINISH HANDING

Dimensions unless specified otherwise are: Inches (Millimeters)