


## SINGLE ACTING TEMPLATE SPRING HINGE

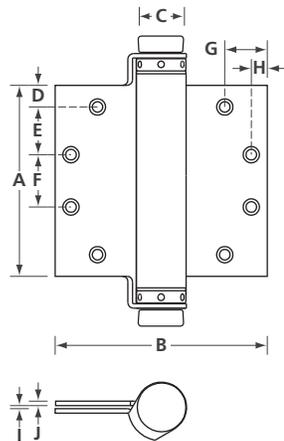


- Non-handed
- Base material: steel
- Easily adjusted spring tension
- Designed with square corners
- Door flange designed to fit standard 4 1/2" x 4 1/2" template mortise
- All hinges are ANSI template
- Packaged in pairs with screws
- Finish: primed

MAXIMUM DOOR SPECIFICATIONS				
SIZE	NUMBER OF SPRING HINGES	MAX. WEIGHT LBS / KG	MAX. WIDTH	THICKNESS
6	2	125.0 / 56.8	36" (914.4mm)	1 3/4" (44.5mm)
	3	155.0 / 70.5	48" (1219.2mm)	

MODEL NUMBER	FINISH	A	B	C	D	E	F	G	H	I	J	PER BOX / CASE	WEIGHT LBS / KG
SP2860	P	4 1/2 (114.4)	5 (127.0)	1 (25.4)	1/2 (12.9)	1 1/8 (28.6)	1 1/4 (31.6)	1 (25.4)	3/8 (9.5)	1/16 (1.6)	0.100 (2.5)	2 / 12	42.0 / 19.1

ORDERING EXAMPLE: **SP2860** | **645** | **P**  
SERIES | SIZE | FINISH

## UNIVERSAL REPLACEMENT HINGE

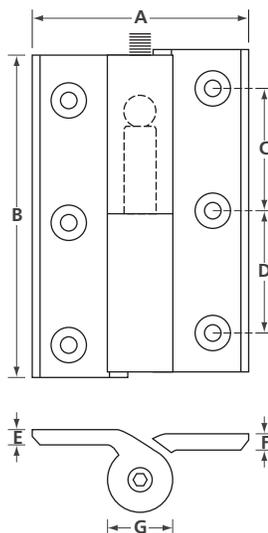

- Non-handed
- Surface mounted
- For flush mounted or 1/8" recessed doors
- 1/8" vertical door adjustment or 1/8" recessed doors
- High quality anodized aluminum extrusion; precision machined
- Top and bottom bearing balls with anti-friction roller bearings for smooth hinge pin rotation
- Easy and quick installation; instructions included
- Each boxed set consists of:
  - 2 hinges of 5" (127.0mm) x 3 1/4" (82.6mm)
  - 4 adhesive cover strips
  - 2 shim plates 1/8" (3.8mm) offset
  - 1 hex key
  - 12 tamper-resistant fasteners

MODEL NUMBER	FINISH	A	B	C	D	E	F	G	PER BOX / CASE	WEIGHT LBS / KG
1020	20D, 28	3 5/32 (80.2)	5 (127.0)	2 (50.8)	2 (50.8)	7/32 (5.6)	7/32 (5.6)	31/32 (24.6)	8 / 32	16.1 / 7.3

ORDERING EXAMPLE: **1020** | **-28**  
SERIES | FINISH