


# 2-KNUCKLE FULL MORTISE PLAIN BEARING

## STANDARD WEIGHT 4 112" x 4" 4 112" x 4 112"

\_B6

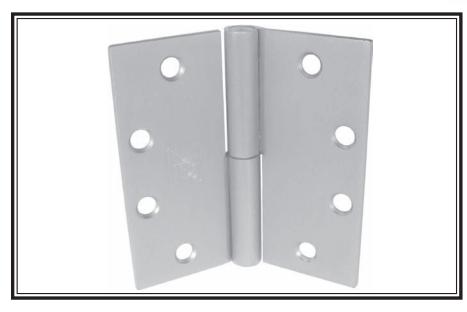

**2P81** (ANSI A8133) Steel-Polished and Plated or Bonderized and Prime Coated for Painting.

2P51 (ANSI A5133) Stainless Steel-Polished and Satin Finish

- •For use on medium weight doors or doors requiring low frequency service.
- •Not for use with door closer.
- •Secure: Door cannot be lifted off when in closed position.
- Vertical load taken by nylon washer
- ·Handing of hinge is required.
- •All hinges are ANSI template.

**GENERAL PRODUCT INFORMATION: PBB,** Inc. template hinges are manufactured to close tolerances and meet all specifications and requirements set by the American National Standards Institute (ANSI).

**HINGE SWAGING:** A standard swaging of our standard weight full mortise hinge when closed to parallel position provides a 1/16" clearance between leaves.

#### OTHER SPECIFICATIONS:

Height of hinge:

Width:

4.50 + .000 - .015 for 4-1/2" x 4"

4.50 + .000 - .015

for 4-1/2" x 4-1/2"

 $4.00 \pm .015$  for 4-1/2" x 4"

 $4.50 \pm .015$  for 4-1/2" x 4-1/2"

### **MATERIAL GAUGE:**

.134 ± .005 for 4-1/2" x 4" .134 ± .005 for 4-1/2" x 4-1/2"

## 4-1/2" STANDARD SCREW SIZE

FHMS - 12-24 x 1/2" FHWS - 12 x 1-1/4"

#### **PACKAGING INFORMATION:**

One hinge per plastic bag, 3 hinges and 1 screw pack per unit carton.

16 unit carton or 48 hinges per master shipping carton.

1 screw pack includes all machine screws (24), and 1/2 wood screws (12). ATMS & AWS also available.