

COMMERCIAL THRESHOLD

Applies to the following thresholds: **1842_S, 1842_PK, 290_SSTOP, 290_PKSTOP**

Testing/Ratings:




Barrier-free with 1/4" saddle only.




Category J gaskets for use with listed steel frames and/or classified steel covered composite, hollow metal doors rated up to and including 3 hours; wood and plastic covered composite doors rated up to and including 1-1/2 hours; and wood core doors rated for 20 minutes. (Thresholds may or may not contain gasketing material).

Tools Required:



Installation Instructions:

Top (plan) view of door opening (out-swing type)

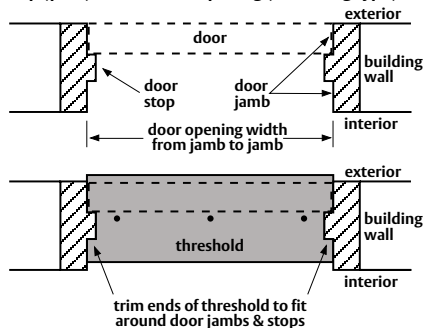

1. Carefully trim to fit within the stops of frame opening.
2. Trim seal 1/16" longer than trimmed stop at each end.
3. Position against door to assure proper seal (not too tight).
4. Fasten to threshold with #10 x 3/4" flat head self tapping machine screws.