

Architectural Door Accessories

ASSA ABLOY

Pemko Residential Threshold

The global leader in
door opening solutions

Applies to the following product:

155_V


Testing/Ratings:

Installation Instructions:

1. Carefully cope to fit within the frame opening, making sure seal will make proper contact with door face.
2. Trim seal 1/16" longer than threshold at each end.
3. Use a sealant or compound at all edges and joints.
4. Fasten with screws provided.

Gasketing material for fire doors intended for application to listed steel frames and/or classified steel covered composite type, and hollow metal type fire doors rated up to 3 hours; wood and plastic covered composite type fire doors rated up to 1-1/2 hours; and wood core type fire doors rated up to 20 minutes.

(Thresholds may or may not contain gasketing material).

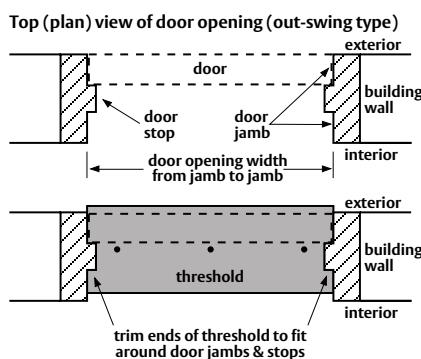

Tools Required:



www.pemko.com

MEMPHIS, TN USA VENTURA, CA USA
P: 800 824-3018 P: 800 283-9988
F: 800 243-3656 F: 800 283-4050

VANCOUVER, BC CA TORONTO, ON CA
P: 877 535-7888 P: 877 535-7888
F: 877 535-7444 F: 877 535-7444

Copyright © 2017 Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Company is prohibited.

RT17_WEBINS
Rev 3 - 01.25.17
Page 1 of 1