


# COMMERCIAL THRESHOLD

Applies to the following thresholds: 252X226\_T, 254X226\_T, 255X226\_T, 252X226\_FGT, 253X226\_FGT, 254X226\_FGT, 255X226\_FGT


## Testing/Ratings:



## Tools Required:



## Installation Instructions:

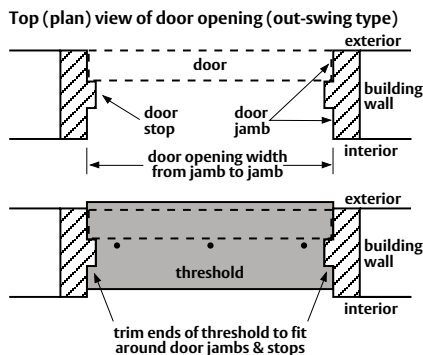

1. Carefully cope to fit within the frame opening making sure seal will make contact with door face.
2. Trim seal 1/16" longer than threshold at each end. Use a sealant or compound at all edges and joints.
3. Fasten with screws provided.