


Adhesive Astragal/Meeting Stile Seals

- The **S771** and **S772** astragal/meeting stile seals can be installed on virtually any pair of doors where sound attenuation is required. These products seal the opening to prevent heat loss, retard the passage of smoke, and act as a weatherization product
- Excellent resistance to compression set, particularly at elevated temperatures and for extended periods of time
- Stays flexible between -58°F and 450°F with very high resistance to flex fatigue
- Maintains a low closing force
- Easy installation requires no mechanical fasteners; can be cut to size in the field


S771_

AVAILABLE FINISHES: **BL, C, D, GR, W**
AVAILABLE LENGTHS: 7', 8', 9', 10'
ANSI: **ROE754, ROE755**



S772_


AVAILABLE FINISHES: **BL, C, D, GR, W**
AVAILABLE LENGTHS: 7', 8', 9', 10'
ANSI: **ROE754, ROE755**



S771x6_

AVAILABLE FINISHES: **BL, C**
AVAILABLE LENGTHS: 7', 8', 9', 10'
ANSI: **ROE154, ROE155, ROE754, ROE755**

- Designed for hollow metal and wood meeting stile applications
- Seal begins compressing at $\frac{5}{16}$ " ; compresses to seal up to a $\frac{1}{16}$ " gap



Notes For All Adhesive Gasketing:

Storage and shelf life: All adhesive gaskets have a limited shelf life. This product must be installed within 6 months of purchase and must be stored between 50°F and 100°F. For further notes/details, please see Adhesive Gasketing section.


Adjustable Astragals

- Available in 84", 96" and 120" lengths
- When used as split astragals on double doors, two lengths must be ordered: one for each door
- If you require split astragals in a metal to gasket configuration, you must order using part number 351_ / 351_S where "S" can be any gasket designation shown in this section and "_" is your desired finish

351_S

AVAILABLE FINISHES:
10BE, B, BSP, C, D, G, WSP
REPLACEMENT INSERT:
S4 (BL, GR)


- Surface applied
- For use with square-edge or bevel-edge doors
- 351_S (et al) is one single piece; order 351_ / 351_S to receive both pieces as in drawing

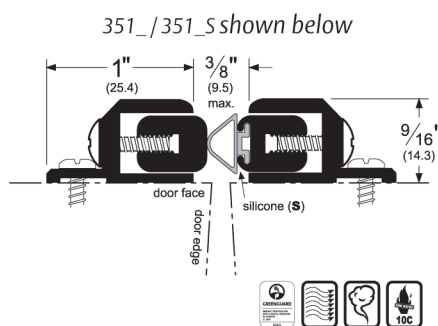

354_S

AVAILABLE FINISHES:
10BE, B, BSP, C, D, G, WSP
REPLACEMENT INSERT:
S4 (BL, GR)

- Fully mortised
- Designed for use with bullnose doors
- 354_S (et al) is one single piece; order 354_ / 354_S to receive both pieces as in drawing

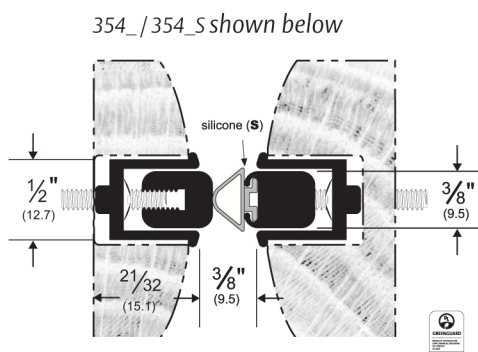

Alternate Inserts For 351

351_PK

AVAILABLE FINISHES:
10BE, B, BSP, C, D, G, WSP
REPLACEMENT INSERT:
PK4 (BL, GR)




351_V

AVAILABLE FINISHES:
10BE, B, BSP, C, D, G, WSP
REPLACEMENT INSERT:
EV41 (BL, GR, W)



351_P

AVAILABLE FINISHES:
10BE, B, BSP, C, D, G, WSP
REPLACEMENT INSERT:
P2 (BL, GR)



Alternate Inserts For 354

354_PK

AVAILABLE FINISHES:
10BE, B, BSP, C, D, G, WSP
REPLACEMENT INSERT:
PK4 (BL, GR)



354_V

AVAILABLE FINISHES:
10BE, B, BSP, C, D, G, WSP
REPLACEMENT INSERT:
EV41 (BL, GR, W)



354_P

AVAILABLE FINISHES:
10BE, B, BSP, C, D, G, WSP
REPLACEMENT INSERT:
P2 (BL, GR)



AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)

10BE (Satin Bronze Powder Coated Aluminum) **B** (Mill Finish Extruded Bronze [Brass]) **BSP** (Black Suede Powder Coated Aluminum) **C** (Clear Anodized) **D** (Dark Bronze Anodized) **G** (Gold Anodized) **WSP** (White Suede Powder Coated Aluminum)
Special finishes available upon request
Gasket colors: **BL** (Black) **C** (Clear) **D** (Dark) **GR** (Gray) **W** (White)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog