

P365V16

Gray Vinyl Garage Door Bottom Seal

Garage Door Weatherstrip

Use On: Bottom of Sectional
or One Piece Garage Doors




- Big headed nails included.
- Seals up to $3/4"$ (19.1 mm) gaps.
- Seals out drafts, dust and water.
- Long lasting.
- Flexible at high and low temperatures.
- Cushions and absorbs door closing shock.
- Easy to install.

P365V16

Gray





THICKNESS	WIDTH	LENGTH
1-3/4" (44.4 mm)	5/8" (15.9 mm)	16' (4.9 m)

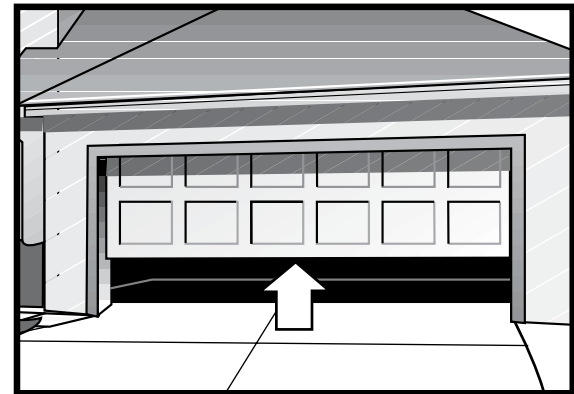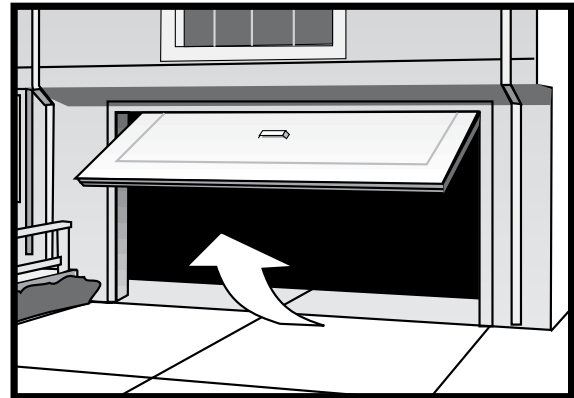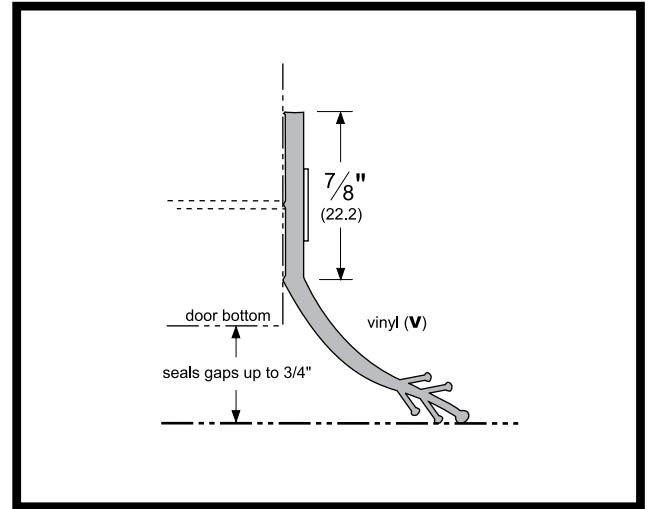


USE ON:


One Piece Garage Doors

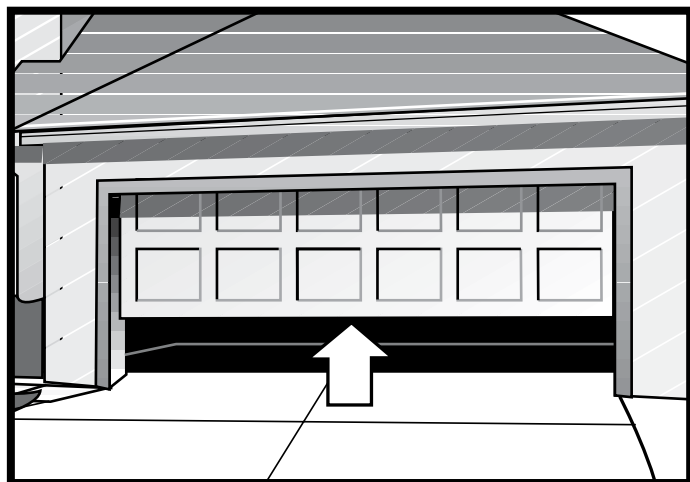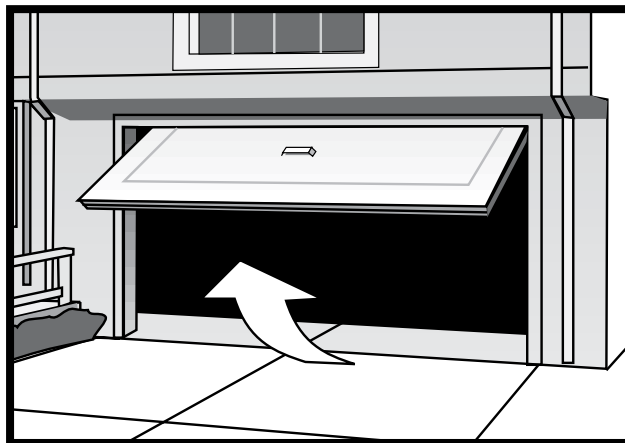

Sectional Garage Doors

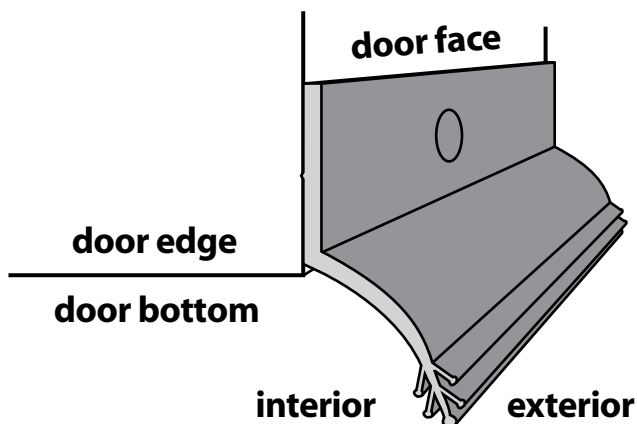

At the door bottom (for both one piece and sectional), install on exterior (outside) door face.

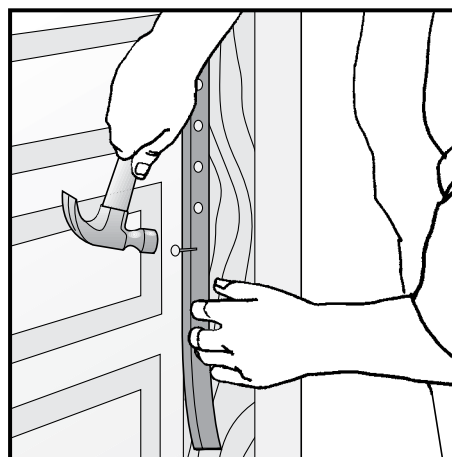

At the top and sides (for sectional doors), install on the jambs.

Installation Instructions:

IN GENERAL:

1. With garage door in closed position, locate weatherstrip so it will seal the gaps between the door sides and the jambs, the door top and the jamb header and the floor.
2. Fasten with big headed nails supplied.
3. Install nails approximately one every 4 inches.

ONE PIECE DOORS:

1. At door bottom and sides, install on the face or the edges of the door.
2. At door top, install on jamb header.

SECTIONAL DOORS:

1. At door bottom, install on the face or the bottom edge of the door.
2. At door sides, install on jambs.
3. At door top, install on jamb header.



ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

UNITED STATES:

MEMPHIS, TN
Ph: 800.824.3018
Fax: 800.243.3656

VENTURA, CA
Ph: 800.283.9988
Fax: 800.283.4050

CANADA:

VANCOUVER, BC
Ph: 877.535.7888
Fax: 877.535.7444

TORONTO, ON
Ph: 866.243.9816
Fax: 866.243.9817

© 2007 Pemko Manufacturing Co.
P365V16_INS
Rev 1 - 11.19.07