

Kerf-In Weatherstrip (Cont.)


PK52_

AVAILABLE FINISHES: **BL, W**

ANSI: **R0G154**

AVAILABLE LENGTHS: **18', 20', 300'**

- Minimum space between the door face and the stop is $\frac{1}{16}$ "; maximum space is $\frac{3}{8}$ "

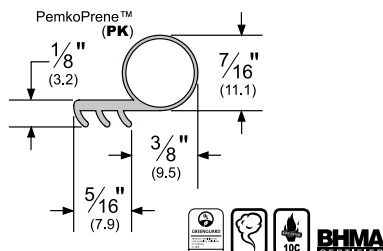


P50_

AVAILABLE FINISHES: **BL, W**

AVAILABLE LENGTHS: **17', 25', 250'**

- Minimum space between the door face and the stop is $\frac{1}{16}$ "; maximum space is $\frac{1}{16}$ ".
- Thermoplastic elastomer formulation will not transmigrate; remains flexible to -60° F




MAG349_

AVAILABLE FINISHES: **D, W**

AVAILABLE LENGTHS: **37", 85", 96", 121"**

- Minimum space between the door face and the stop is $\frac{3}{8}$ "; maximum space is $\frac{7}{16}$ ".
- Magnetic kerf-in weatherstrip features a magnetic strip encased by a UV-stable TPE cover
- Use for steel-faced door and wood frame applications
- Can be trimmed in the field and corner-mitered




Magnetic Kerf-In Weatherstrip

2815_M

AVAILABLE FINISHES: **C, D, G**

REPLACEMENT INSERT: **2815MAG**

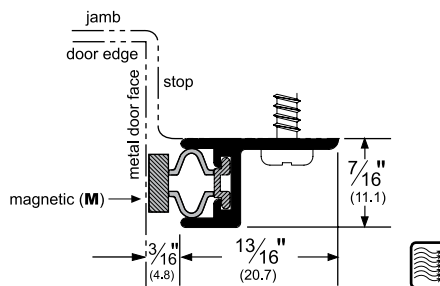

Adhesive Perimeter Gasketing

For more information on these perimeter gasketing products, please see the Adhesive Gasketing section.


S773_

AVAILABLE FINISHES: **BL, D, GR, W**

AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 250', 500'**

ANSI: **R0E154, R0E155**

- Triple-fin design blocks light and sound from infiltrating a room
- Product designed as hospitality gasketing (see more hospitality products in the Hospitality Products section)
- Seal begins compressing at $\frac{3}{8}$ "; compresses to seal up to a $\frac{1}{16}$ " gap




S88_

AVAILABLE FINISHES: **BL, C, D, GR, TAN, W**

AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 204', 510'**

ANSI: **R0E154, R0E155**

- Seal begins compressing at $\frac{1}{4}$ "; compresses to seal up to a $\frac{1}{16}$ " gap
- Available with perforations for Behavioral Health applications. Substitute "P" in place of "S" to order this option.




S44_

AVAILABLE FINISHES: **BL, C, D, GR, W**

AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 204', 510'**

ANSI: **R0E154, R0E155**

- Designed for tighter frames.
- Demonstrates extremely low closing force.
- Seal begins compressing at $\frac{5}{16}$ "; compresses to seal up to a $\frac{1}{16}$ " gap
- Available with perforations for Behavioral Health applications. Substitute "P" in place of "S" to order this option.



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)

Adhesive Gasketing Colors: **BL** (Black) **C** (Clear) **D** (Dark Brown) **GR** (Light Gray) **TAN** (Tan) **W** (White)

ASSA ABLOY

The global leader in
door opening solutions

Adhesive Perimeter Gasketing (Cont.)

For more information on these perimeter gasketing products, please see the Adhesive Gasketing section.


S442_

AVAILABLE FINISHES: **BL, D, GR, W**

AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**

ANSI: **R0E154, R0E155**

- Fits flush into corner
- Seal begins compressing at $\frac{5}{16}$ "; compresses to seal up to a $\frac{1}{16}$ " gap




S776_

AVAILABLE FINISHES: **BL**

AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30'**

ANSI: **R0E154, R0E155**

- Designed for hollow metal and wood meeting stile applications
- Seal begins compressing at $\frac{3}{8}$ "; compresses to seal up to a $\frac{1}{16}$ " gap




S771x6_

AVAILABLE FINISH: **BL**

AVAILABLE LENGTHS: **7', 8', 10', 17', 18', 20', 21', 25'**

ANSI: **R0E154, R0E155**

- Designed for hollow metal and wood meeting stile applications
- Seal begins compressing at $\frac{5}{16}$ "; compresses to seal up to a $\frac{1}{16}$ " gap




S77_

AVAILABLE FINISHES: **C, BL, D, W**

AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30'**

ANSI: **R0E154, R0E155**

- Designed for hollow metal and wood meeting stile applications.
- Seal begins compressing at $\frac{5}{16}$ "; compresses to seal up to a $\frac{1}{16}$ " gap




PK33_

AVAILABLE FINISHES: **BL, D, W**

AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**

ANSI: **R0G154, R0G155**

- Designed for tighter frames.
- Demonstrates extremely low closing force.
- Seal begins compressing at $\frac{3}{16}$ "; compresses to seal up to a $\frac{1}{16}$ " gap




PK55_

AVAILABLE FINISHES: **BL, D, W**

AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**

ANSI: **R0G154, R0G155**

- Designed for tighter frames.
- Demonstrates extremely low closing force.
- Seal begins compressing at $\frac{3}{16}$ "; compresses to seal up to a $\frac{1}{16}$ " gap




MicroShield® Antimicrobial Adhesive Gasketing

AM44_

AVAILABLE FINISHES: **BL, C, D, W**

AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**

ANSI: **R8E154, R0E155**




AM88_

AVAILABLE FINISHES: **BL, C, D, W**

AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**

ANSI: **R8E154, R0E155**



NOTES FOR ALL ADHESIVE GASKETING:

Storage and shelf life: All adhesive gaskets have a limited shelf life. This product must be installed within 6 months of purchase and must be stored between 50°F and 100°F. For further notes/details, please see Adhesive Gasketing section.

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)

Adhesive Gasketing Colors: **BL** (Black) **C** (Clear) **D** (Dark Brown) **GR** (Light Gray) **W** (White)