


Heavy Duty Perimeter Gasketing - Standard Jamb

- For the head section of the frame where a parallel arm closer bracket or other hardware is required. Supplied undrilled (36") or drilled (80" and above) and supplied with sheet metal screws for mounting
- If used as a stop, flat head machine screws can be provided upon request and take a countersunk #10 hole. PEMKO will drill the head member only if drilling instructions for countersink holes are provided
- All gasketing shown below is sold individually


290_PK

AVAILABLE FINISHES: **A, D, G**
REPLACEMENT INSERT: **PK47 (BL, GR)**
ANSI: **R3G164, R3G165**

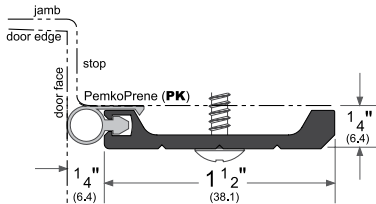

29045_NB


AVAILABLE FINISHES: **A, D, G**
REPLACEMENT INSERT: **P14050 (BL, GR)**
ANSI: **R3A164, R3A165**



Alternate Inserts For 290

290_S

AVAILABLE FINISHES: **A, D, G**
REPLACEMENT INSERT: **S3 (BL, GR, W)**
ANSI: **R3E164, R3E165**




290_V

AVAILABLE FINISHES: **A, D, G**
REPLACEMENT INSERT: **EV47 (BL, GR, W)**




2902_V

AVAILABLE FINISHES: **A, D, G**
REPLACEMENT INSERT: **EV59 (BL, GR, W)**

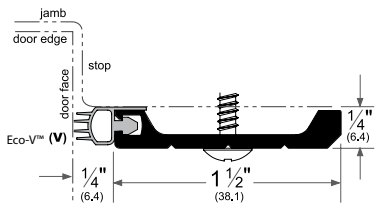

2903_V

AVAILABLE FINISHES: **A, D, G**
REPLACEMENT INSERT: **EV60 (GR)**

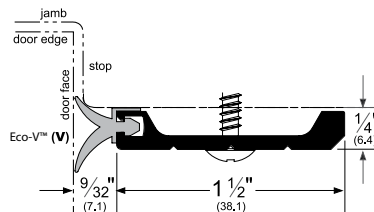


2891_PK

1 per door
standard

290_PK

2 per door
standard



When ordering a head section such as 2891_PK, two corresponding side sections (i.e. 290_PK) should also be ordered for the latch and hinge sides of the frame.

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)
A (Mill Finish Aluminum) **D** (Dark Bronze Anodized) **G** (Gold Anodized)