


Latching Panic Exit Saddles

- Used in conjunction with surface applied vertical rod exit device, or as a stop and a seal at the bottom of door
- For offset applications, use an elevator (see page 135)
- 2006_T and 2007_T** are only ADA compliant when installed butted to $\frac{1}{4}$ " tile or other floor material

2001_T

AVAILABLE FINISHES: **A, D, G**
REPLACEMENT INSERT: **T5 (BL)**


- Allow $\frac{1}{4}$ " door clearance
- Special purpose bumper threshold designed for use with a low $\frac{1}{4}$ " to $\frac{3}{8}$ " undercut door.

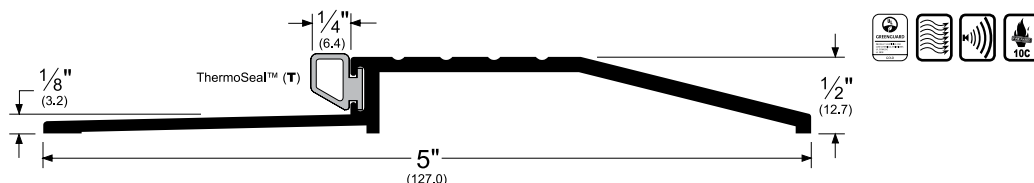

2002_Q

AVAILABLE FINISHES: **A, D, G**
Replacement Insert: **Q103 (D, W)**


Allow $\frac{1}{4}$ " door clearance

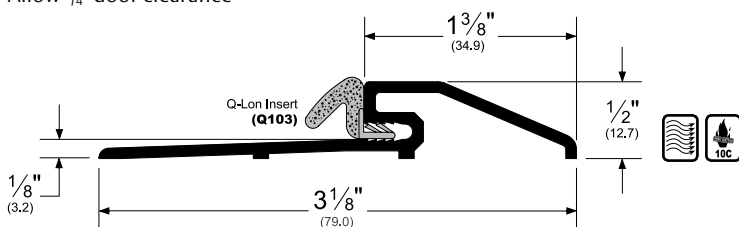

2005_T

AVAILABLE FINISH: **A, B, D, G**
REPLACEMENT INSERT: **T5 (BL)**
ANSI (aluminum): **J35100, J35130, J36100, J36130**
ANSI (brass): **J15100, J15130, J16100, J16130**


Allow $\frac{3}{8}$ " door clearance

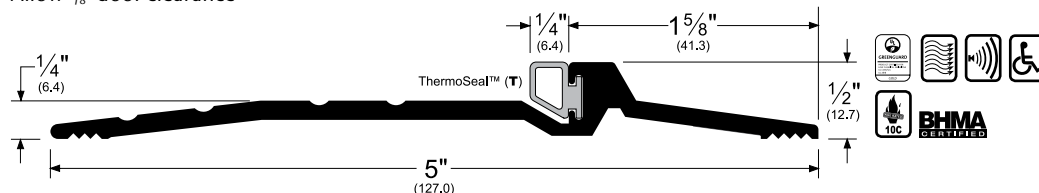

2006_T

AVAILABLE FINISH: **A, D**
REPLACEMENT INSERT: **T5 (BL)**
ANSI (aluminum): **J35100, J35130, J36100, J36130**

Allow $\frac{3}{8}$ " door clearance

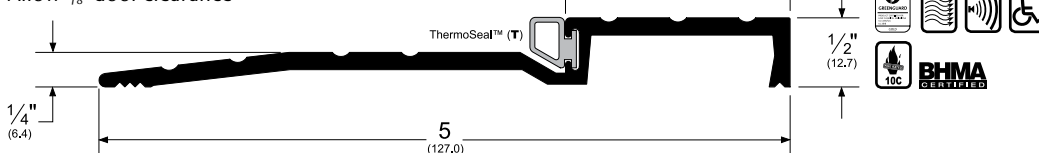

Alternate Inserts



pile (P)

2001_P



2005_P



2006_P



2007_P

REPLACEMENT INSERT:
P2 (BL, W)



Eco-V™ (V)

2001_V



2005_V



2006_V



2007_V

REPLACEMENT INSERT:
EV41 (BL, GR, W)

ASSA ABLOY

The global leader in
door opening solutions

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)
A (Mill Finish Aluminum) **B** (Mill Finish Extruded Bronze [Brass]) **D** (Dark Bronze Anodized) **G** (Gold Anodized)

NOTE: **G** is available with limited inventory

Copyright © 2015, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.

Latching Panic Exit Saddles (Cont.)


2007_T

AVAILABLE FINISH: **A, D**

REPLACEMENT INSERT: **T5 (BL)**

ANSI (aluminum): **J35100, J35130, J36100, J36130**

Allow $\frac{3}{8}$ " door clearance

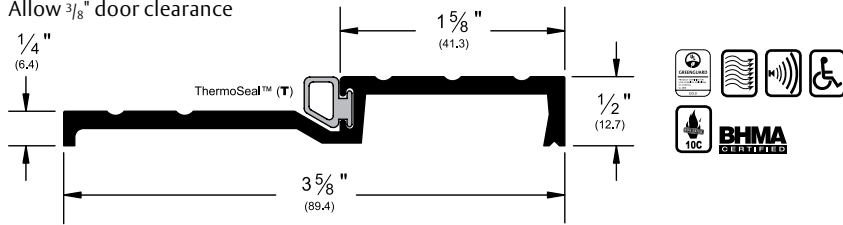


2009_PK

AVAILABLE FINISHES: **A, D**

REPLACEMENT INSERT: **PK20 (BL)**

ANSI: **J36100, J36130**

Allow $\frac{3}{8}$ " door clearance

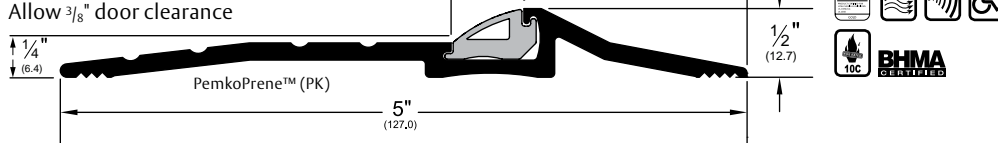


2010_PK

AVAILABLE FINISHES: **A, D**

REPLACEMENT INSERT: **PK20 (BL)**

ANSI: **J36100, J36130**

Allow $\frac{3}{8}$ " door clearance

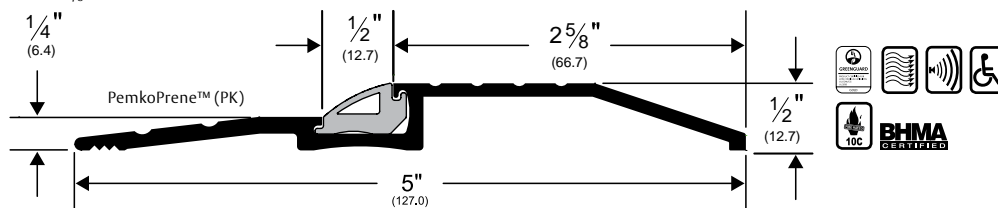

179_T


AVAILABLE FINISHES: **A, B, D, G**

REPLACEMENT INSERT: **T5 (BL)**

ANSI (aluminum): **J35100, J36100**

ANSI (brass): **J15100, J16100**

Allow $\frac{1}{2}$ " door clearance

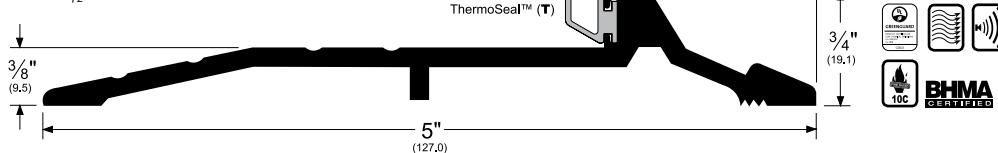


277_S

AVAILABLE FINISHES: **A, D, G**

REPLACEMENT INSERT: **SR6 (BL)**

ANSI (aluminum): **J35100, J36100**

Allow $\frac{5}{8}$ " door clearance

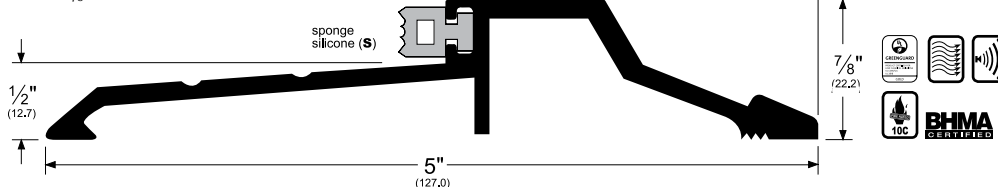

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)

A (Mill Finish Aluminum) **B** (Mill Finish Extruded Bronze [Brass]) **D** (Dark Bronze Anodized) **G** (Gold Anodized)

NOTE: **G** is available with limited inventory

Alternate Inserts



pile (**P**)

2007_P

REPLACEMENT INSERT:
P2 (BL, W)



Eco-V™ (**V**)

2007_V

REPLACEMENT INSERT:
EV41 (BL, GR, W)

Alternate Inserts



pile (**P**)

179_P

REPLACEMENT INSERT:
P2 (BL, W)




Eco-V™ (**V**)

179_V

REPLACEMENT INSERT:
EV41 (BL, GR, W)

Alternate Inserts



sponge
EPDM (**R**)

277_R

REPLACEMENT INSERT:
E7 (BL)
ANSI (aluminum):
J36100

ASSA ABLOY


The global leader in
door opening solutions

Latching Panic Exit Saddles (Cont.)


159_T

AVAILABLE FINISHES: **A, B, BDG, D, G**REPLACEMENT INSERT: **T5 (BL)**ANSI (aluminum): **J35300, J36300**ANSI (brass): **J15300, J16300**


- Allow $\frac{9}{16}$ " door clearance
- Provided with "J" hook.
- Can also be used as an interlock threshold (see Residential Thresholds section)

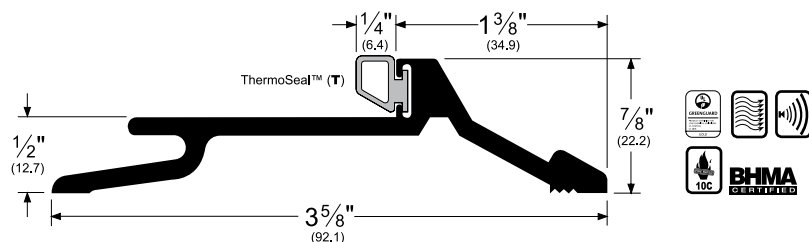


177_T

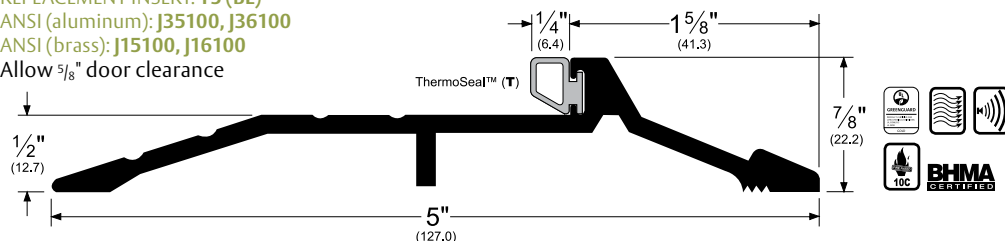AVAILABLE FINISHES: **A, B, D, G**REPLACEMENT INSERT: **T5 (BL)**ANSI (aluminum): **J35100, J36100**ANSI (brass): **J15100, J16100**Allow $\frac{5}{8}$ " door clearance

1855_T

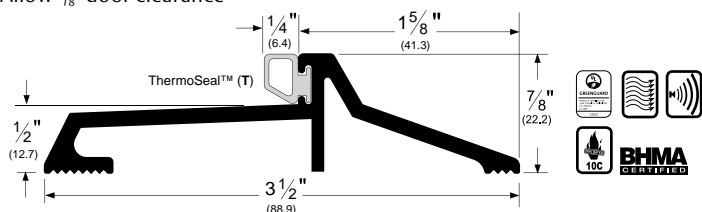AVAILABLE FINISHES: **A, D, G**REPLACEMENT INSERT: **T5 (BL)**ANSI (aluminum): **J35100, J36100**Allow $\frac{5}{8}$ " door clearance

181_T

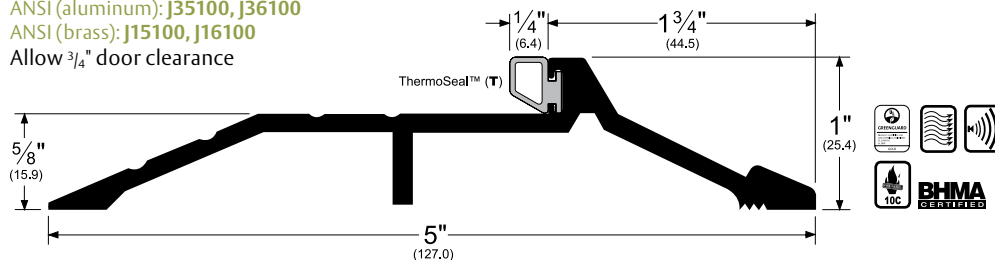AVAILABLE FINISHES: **A, B, D, G**REPLACEMENT INSERT: **T5 (BL)**ANSI (aluminum): **J35100, J36100**ANSI (brass): **J15100, J16100**Allow $\frac{3}{4}$ " door clearance

Alternate Inserts

pile (**P**)

159_P

177_P

1855_P

181_P

REPLACEMENT INSERT:

P2 (BL, W)Eco-V™ (**V**)

159_V

177_V

1855_V

181_V

REPLACEMENT INSERT:

EV41 (BL, GR, W)

ASSA ABLOY

The global leader in
door opening solutions

NOTE: Products shown in this section may not be drawn to scale.


AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)

A (Mill Finish Aluminum) **B** (Mill Finish Extruded Bronze [Brass]) **BDG** (Bright Dip Gold Anodized)**D** (Dark Bronze Anodized) **G** (Gold Anodized)NOTE: **G** is available with limited inventoryCopyright © 2015, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.

Latching Panic Exit Saddles (Cont.)


185_T

AVAILABLE FINISHES: **A, D, G**
REPLACEMENT INSERT: **T5 (BL)**
ANSI (aluminum): **J35300, J36300**
Allow $\frac{3}{4}$ " door clearance

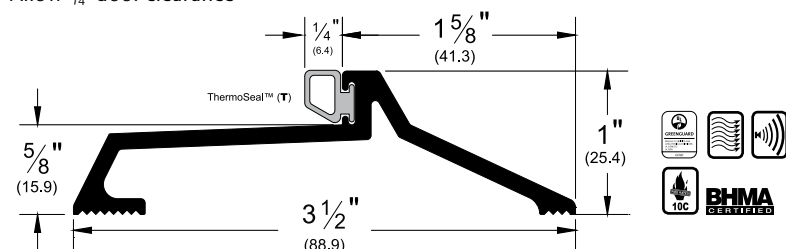


252x226_T

AVAILABLE FINISHES: **A, B, D, G**
REPLACEMENT INSERT: **T5 (BL)**
ANSI (aluminum): **J35100, J36100**
ANSI (brass): **J15100, J16100**
Allow $\frac{5}{8}$ " door clearance

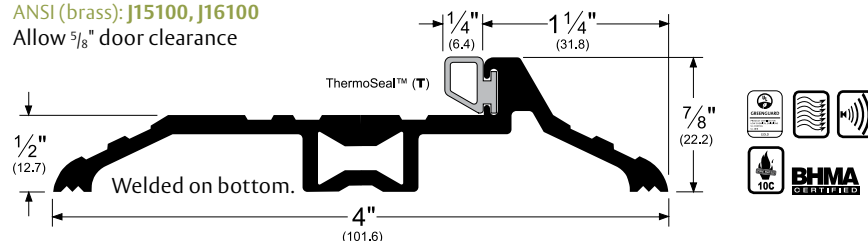


254x226_T

AVAILABLE FINISHES: **A, B, D, G**
REPLACEMENT INSERT: **T5 (BL)**
ANSI (aluminum): **J35100, J36100**
ANSI (brass): **J15100, J16100**
Allow $\frac{5}{8}$ " door clearance

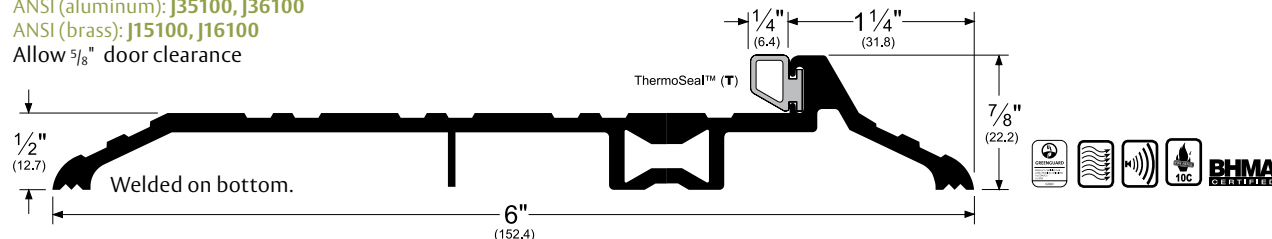

255x226_T

AVAILABLE FINISHES: **A, B, D, G**
REPLACEMENT INSERT: **T5 (BL)**
ANSI (aluminum): **J35100, J36100**
ANSI (brass): **J15100, J16100**
Allow $\frac{5}{8}$ " door clearance

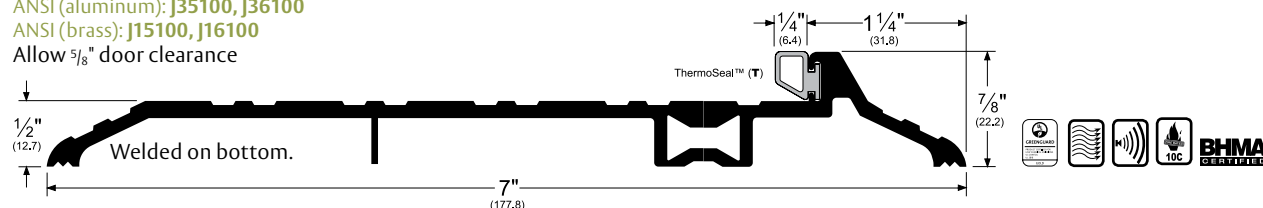

Alternate Inserts



pile (P)

185_P

252x226_P

254x226_P

255x226_P

REPLACEMENT INSERT:
P2 (BL, W)



Eco-V™ (V)

185_V

252x226_V

254x226_V

255x226_V

REPLACEMENT INSERT:
EV41 (BL, GR, W)

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)
A (Mill Finish Aluminum) **B** (Mill Finish Extruded Bronze [Brass]) **D** (Dark Bronze Anodized) **G** (Gold Anodized)

NOTE: **G** is available with limited inventory

Copyright © 2015, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.

ASSA ABLOY

The global leader in
door opening solutions