
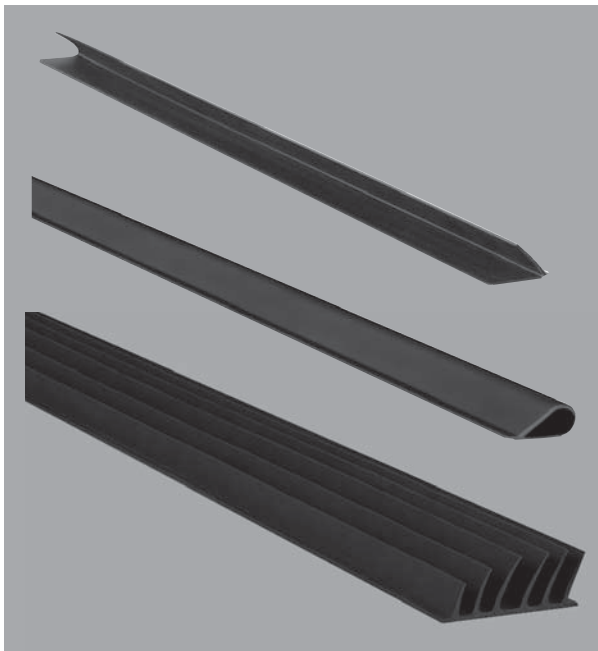
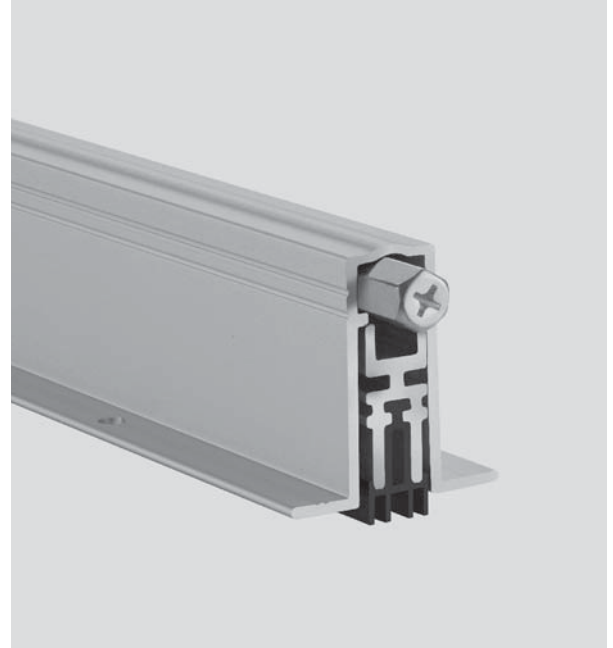


Architectural Door Accessories

ASSA ABLOY

The global leader in
door opening solutions



Pemko Condensed Catalog

About

This condensed catalog is designed to introduce you to some of the Pemko products that are available. There are many Pemko products that are not included in this catalog. Please visit our website www.assaabloydooraccessories.us to view the complete product line. Catalogs and other information is available for download. Call Pemko Customer Service at 1-800-824-3018 for additional information and technical service.

Contents

PemkoHinge® Continuous Geared Hinges.....	3-4
Markar Continuous Hinges.....	5-6
Commercial Thresholds.....	7-11
Eco-V® Thresholds.....	12
Modular Ramps.....	13
Door Bottoms.....	14-17
Acoustic Automatic Door Bottoms.....	15
Astragals and Meeting Stiles.....	17-18
Brush Gasketing.....	19-20
Perimeter Gasketing.....	21-22
Adhesive Gasketing.....	23-24
Acoustic Seal Sets.....	25
Sliding and Folding Hardware.....	26-27

Index:

PRODUCT	PAGE	PRODUCT	PAGE	PRODUCT	PAGE	PRODUCT	PAGE	PRODUCT	PAGE
154SS.....	9	2251_PK.....	16	29310_S.....	17, 21	420_PKL.....	15	HS.....	4
1571.....	7	234_V.....	16	293100_NB.....	20	4301_NBL.....	14	HSS1000.....	24
158.....	7	234_PK.....	16	29324_NB.....	20	4301_RL.....	14	HSS2000.....	24
171.....	8	2343_V.....	16	297_S.....	17, 21	434_NBL.....	14	HSS2000xS44.....	24
1715.....	9	252X2_FG.....	10	303_S.....	17, 21	434_RL.....	14	HSS2000xS88.....	24
1717.....	9	252X3_FG.....	10	305_N.....	18	45041_NB.....	19	PDL.....	24
1718.....	9	252x3SSFG.....	9	306_V.....	21	45061_NB.....	19	PDLBRKT.....	24
172.....	8	252x226_FGT.....	11	369_P.....	18	45062_NB.....	19	PK33.....	24
175SS.....	9	253.....	7	312_R.....	21	45100_NB.....	19	PK55.....	24
176.....	8	253X4_FG.....	10	313_N.....	18	45175_NB.....	19	R.5OS.....	13
179_T.....	11	253SSFG.....	9	315_N.....	17	45250_NB.....	19	R.5OSMR.....	13
18041_NB.....	18, 20	254x226_FGT.....	11	3151_N.....	17	5025_SB.....	20	R.75OSS.....	13
18061_NB.....	20	254X4_FG.....	10	321_N.....	17	5061_NB.....	20	R.75OSSMR.....	13
18062_NB.....	20	254x226_FGT.....	11	322_SPK.....	21	566.....	7	R1F.....	13
18100_NB.....	20	2548.....	8	345_NB.....	17	573x5_FG.....	10	R1FMR.....	13
18175_NB.....	20	2555.....	7	345_P.....	17	ACP112.....	22	S44.....	23
18250_NB.....	20	255X5_FG.....	10	345_V.....	17	ADJ232V8.....	12	S77.....	23
18400_NB.....	20	270.....	8	3452_NB.....	17	AM44.....	23	S771.....	24
2005_T.....	11	271.....	8	350_SPK.....	21	AM88.....	23	S771x6.....	24
2006_T.....	11	2715.....	9	350_SR.....	21	Bypass Track Series.....	26	S772.....	24
2009_PK.....	11	272.....	8	35041_NB.....	19	EG308.....	6	S773.....	23
211_V.....	16	273x224_FGT.....	11	35061_NB.....	19	EV232.....	12	S776.....	23
211_PK.....	16	273X3_FG.....	10	351_/351_S.....	18	EV2320.....	12	S88.....	23
215_V.....	16	273X4_FG.....	10	355_S.....	18	EV2322.....	12	Sliding 200 Series.....	26
215_PK.....	16	274.....	7	356_V.....	18	EV2325.....	12	STC411.....	15
2113_V.....	16	2749.....	8	357_with S88.....	18	FM.....	3	STC4131.....	15
2170_V.....	16	2755.....	7	369_P.....	18	FM300.....	5	W60.....	27
2173_V.....	16	279x292_FGPK.....	11	369_PK.....	18	FM3500.....	5	WT_FM.....	4
2213_PK773.....	16	2891_S.....	22	369_PK773.....	18	FM900.....	6	X25M.....	3
222_V.....	16	2892_V.....	22	369_S.....	18	FM_SLF.....	3	XF.....	3
222_PK.....	16	2893_V.....	22	3692_PK773.....	16	Folding 100 Series.....	26	XI.....	3
225_V.....	16	28945_NB.....	22	379_S.....	21	FS.....	4	XM.....	3
225_PK.....	16	290_PK.....	22	411_NBL.....	15	FS_BP.....	4		
2211_V.....	16	2902_V.....	22	411_RL.....	15	FS_CP.....	4		
2211_PK.....	16	2903_V.....	22	4131_NBL.....	14	HG305.....	6		
2251_V.....	16	29045_NB.....	22	4131_RL.....	14	HG3505.....	5		

ASSA ABLOY

The global leader in
door opening solutions

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PemkoHinge® Continuous Geared Hinges

A PemkoHinge® consists of two full-height, paired and geared leaves. Each geared leaf rotates evenly from top to bottom riding on proprietary polymer blended bearings. The geared leaves and bearings are held together by a full-length channel cap. This assembly retains the smooth, clean lines of the door and frame, while easily supporting heavy vertical loads.

Electrical Modifications:

The cycle performance of the electrically modified hinge has been vastly improved. Performance testing has shown that 3,000,000+ cycles can now be achieved using Pemko's exclusive polyurethane-coated 4, 8, or 12 TRI-FLEX titanium copper alloy cables. Each cable is capable of carrying 6 amps continuous or 16 amps in-rush @ 24-volts for 820 milliseconds.. When ordering, please use the "shorthand code." For example, if you require a Clear Anodized heavy-duty Full-Mortise hinge at 83" with Quick Connect transfer - 4-wire, modified 36¹/₄" from the top, right hand, you would order a CFM83HD1 x QC4 @ 36¹/₄" - RH.

Serviceable/Removable (SER) Module:

The hinge is furnished to be installed in three sections allowing the current carrying cable to be serviced or replaced without removing the door from the frame. Additionally, the SER option allows the current carrying cables to be safely stored or delivered to the electrician or security contractor prior to the installation of the electrified hardware, eliminating the necessity of the electrician or security contractor being present when the doors are being hung.




Full-Mortise Hinges - Standard

- Full-Mortise units are designed mainly for new door applications and are applied to conceal both leaves

Standard

FM
AVAILABLE
FINISHES:
BL, C, D, G,
PW, SN

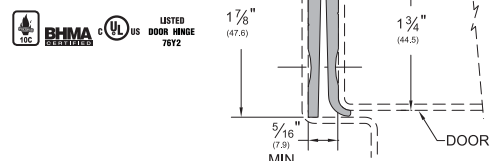


Full-Mortise Hinges - Short Leaf Flush/Inset

- Designed for use with doors which range between 1³/₄" to 2¹/₄"
- Designed for bifold applications to keep the faces of the doors flush


Short Leaf Flush

_FM_SLF_
AVAILABLE
FINISHES:
BL, C, D, G,
PW, SN

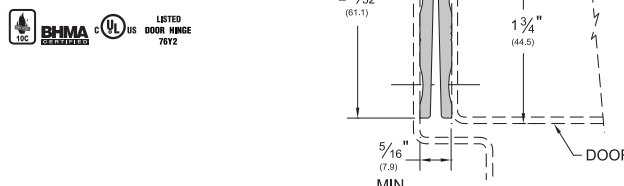


Full Mortise

XM_
AVAILABLE
FINISHES:
C, D

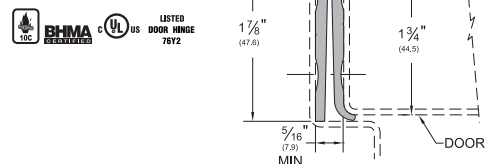


Short Leaf Flush

XF_
AVAILABLE
FINISHES:
C, D,

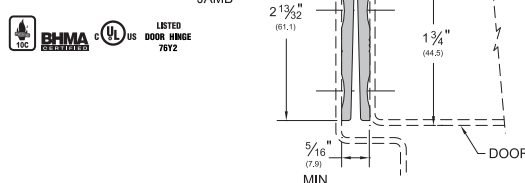


Full Mortise

X25M_
AVAILABLE
FINISHES:
C, D



Short Leaf Inset

XI_
AVAILABLE
FINISHES:
C, D,

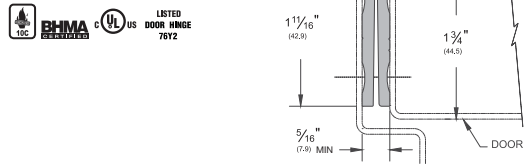

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

C (Clear Anodized) D (Dark Bronze Anodized) G (Gold Anodized) SN (Satin Nickel Anodized)
BL (Black Anodized) and PW (Painted White) are special finishes available upon request.

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ASSA ABLOY

The global leader in
door opening solutions

PemkoHinge® Continuous Geared Hinges (Cont.)


Full-Mortise Hinges - Wide Throw

- Wide Throw Full-Mortise units are designed mainly for new door applications that require extra clearance due to special frame, door or wall design, and are applied to conceal both leaves
- More clearance between the door and frame allows your door to open 180°
- Available only in heavy duty to support larger doors

Wide Throw

WT_FM

AVAILABLE FINISHES:
C, D, G




Half-Surface Hinges - Standard

- Half-Surface units are designed mainly for retrofit work and are applied to the exposed surface of the door and the frame rabbet
- Designed for use with hollow metal frames, where the inset conforms to S.D.I. specifications for aligning doors and frames
- Designed for retrofit applications. Allows for adjustments in order to properly align edge of the door to the frame

Half Surface

HS

AVAILABLE FINISHES:
BL, C, D, G,
PW, SN




Full-Surface Hinges - Standard

- Full-Surface units are designed mainly for retrofit work and are applied to the exposed surfaces of the door and frame

Full Surface

FS

AVAILABLE FINISHES:
BL, C, D, G,
PW, SN




Full-Surface Hinges - Center Pivot

- Full-Surface Center Pivot units are designed mainly for retrofit work and are applied to the exposed surfaces of the door and frame
- Full-Surface Center Pivot units easily replace butt hinges since no door or frame adjustments are necessary and are more versatile with restricted frame faces

Center Pivot

FS_CP

AVAILABLE FINISHES:
BL, C, D, G,
PW, SN

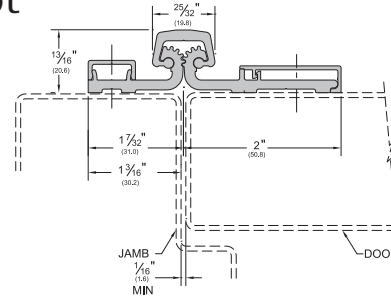

Full-Surface Hinges - Balanced Pivot


- Allows for easy replacement from butt hinges as the pivot point remains the same
- No template adjustments are needed for existing door opening/closing devices

- Equal length leaves provide an aesthetic appearance
- Good in a bi-fold application where two doors need to be hinged

Full Surface

FS_BP

AVAILABLE FINISHES:
BL, C, D,
PW, SN

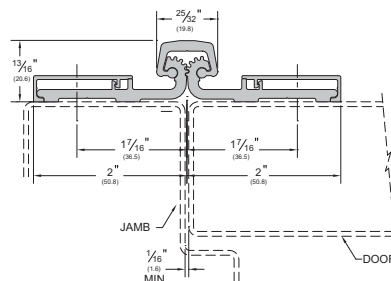

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
(see FULL LINE CATALOG or WEBSITE for finish chart)
C (Clear Anodized) D (Dark Bronze Anodized)
G (Gold Anodized) BL (Black Anodized)
PW (Painted White) and SN (Satin Nickel Anodized)
are special finishes available upon request.

ASSA ABLOY


The global leader in
door opening solutions

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

Markar Continuous Hinges

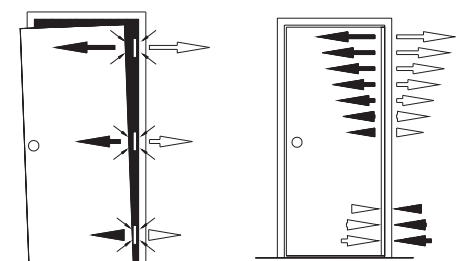

Most door and frame stress is put on the top of conventional hinge systems.

A continuous hinge spreads the stress along the full length of the door and frame.

Why Continuous Hinges?

Did you know that on a door with traditional butt hinges, 70% of the door weight is on the top hinge? The top hinge also bears the brunt of abuse when doors are opened beyond the stop device, resulting in kickback shock and eventual failure of the hinge and damage to the frame. This is why continuous hinges are recommended for heavy doors and for situations where doors are exposed to misuse.

Continuous hinges reduce the factors leading to hinge failure by distributing weight evenly so wear and tear to the frame and door is reduced significantly.


In addition, continuous hinges:

- Increase security and reduce vandalism by preventing insertion of devices between the door and frame
- Ease installation by providing simple alignment of electrical transfers and of monitoring switches
- Reduces air infiltration by creating a complete seal from top to bottom of the door at the hinge jamb

There are over 75 different Markar hinge models to choose from offering a variety of configurations, options, and materials.


Markar FM3500 Edge Mount Security Hinge

This edge mount pin and barrel type hinge is fabricated with extra-heavy duty components for use on high traffic, high abuse doors. The hinge is specially designed and well suited for correctional facilities and other high security locations using up to 2 1/4" thick swing-type doors. Prison doors, gates, extremely tall doors and extra heavy doors are all good candidates for Markar's 3500 Security Hinge.

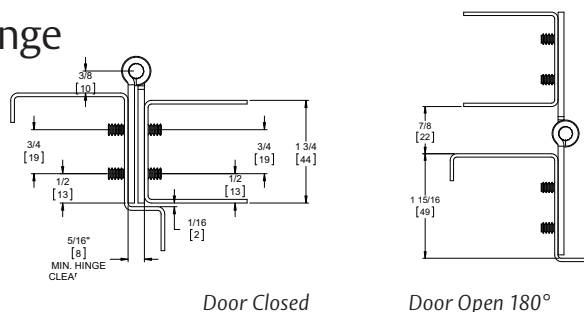


Markar FM300 Edge Mount Hinge

This edge-mounted pin & barrel hinge is used on many of today's high traffic, high abuse doors. The hinge works well in locations that would normally call out for anchor hinges, pivot reinforcement hinges or thrust pivot unit and hinge sets. This hinge saves on special door and frame preparation charges and makes the installer's job easier. It can be used on both fire labeled and non-labeled openings.

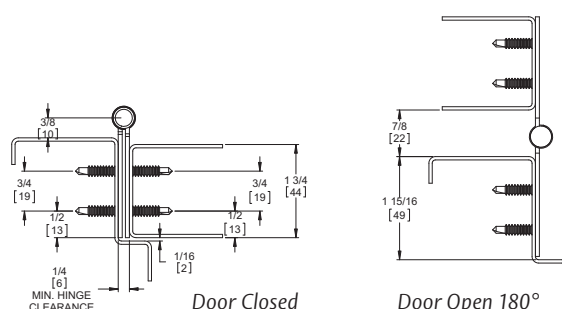

Markar HG3505 Adjustable Hinge Guard


The integral hinge guard protects the door from dings and gouges from carts and gurneys while providing clean lines and aesthetic appearance. Our HG products also have fire ratings up to and including 3 hours.

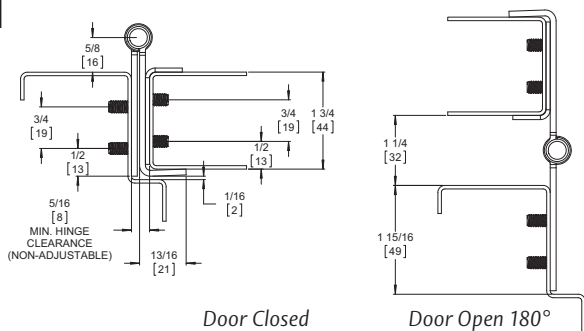


Markar Continuous Hinges (Cont.)

Markar HG305 Adjustable Hinge Guard

The integral hinge guard protects the door from dings and gouges from carts and gurneys while providing clean lines and aesthetic appearance. Our HG products also have fire ratings up to and including 3 hours. Not only that, but the wrap-around edge guard protects the door from unsightly dents and gouges and will deflect objects, preventing further damage.

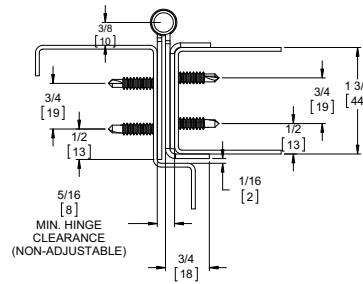


Door Closed



Door Open 180°

Markar EG308 Adjustable Edge Guard


This fire-labeled edge guard is used in conjunction with the HG305 Hinge/Guard for a balanced aesthetic look. It also provides protection for the leading edge of the door.

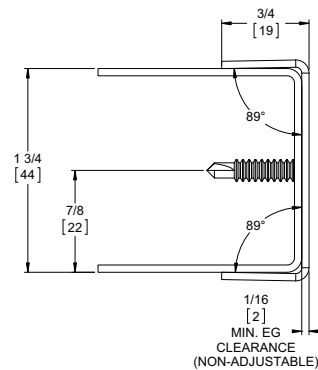


Square edge door

Markar FM900 Edge Mount

Ideal for damp or corrosive environments, Markar's stainless steel toilet partition hinge adds years of life to your high-quality partition.

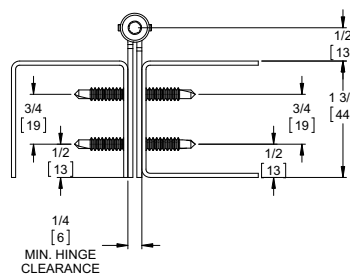

Door Closed

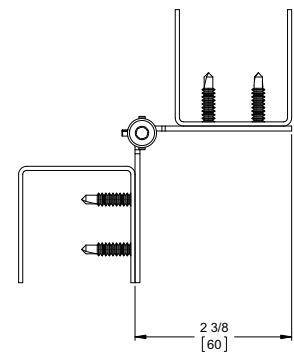

Door Open 90°

ASSA ABLOY

The global leader in
door opening solutions

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

Commercial Thresholds

Half Saddle Thresholds

- See full line catalog or website for full half saddle product offering


274_

AVAILABLE FINISHES:

A, B, D, G

ANSI (aluminum): **J33100, J33130, J33133**

ANSI (brass): **J13100, J13130, J13133**




2755_

AVAILABLE FINISHES:

A, D, G

ANSI (aluminum): **J33100**

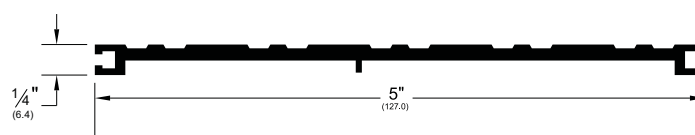


253_

AVAILABLE FINISHES: **A, B, D, G**

ANSI (aluminum): **J33100, J33130**


ANSI (brass): **J13100, J13130**



2555_

AVAILABLE FINISHES: **A, D, G**

ANSI (aluminum): **J33100**

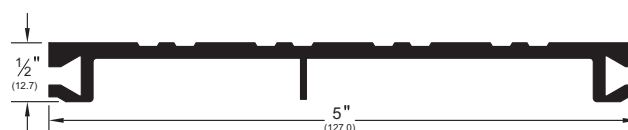


* 2555_ can be combined with other half saddles on one or both sides. If combined only on one side, the opposite side should be mounted flush with an existing offset. Either stated application is required for this to be ADA-compliant.

566_

AVAILABLE FINISHES: **A, D**

ANSI (aluminum): **J33100, J33130**

- Offset Half Saddle

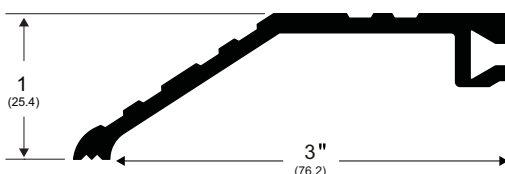


766_

AVAILABLE FINISHES: **A, D**

ANSI (aluminum): **J33100, J33130**

- Offset Half Saddle

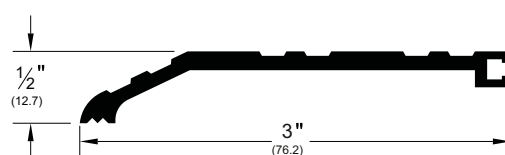

Offset Saddles


158_

AVAILABLE FINISHES:

A, D, G

ANSI (aluminum):

J32100, J32130, J32138, J32180

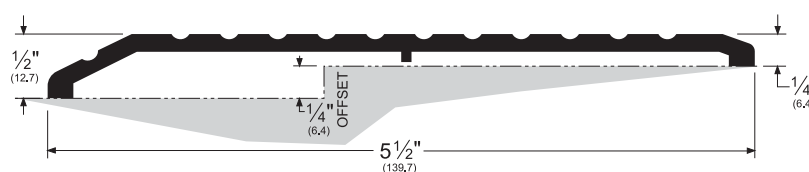


1571_

AVAILABLE FINISHES:

A, D

ANSI (aluminum):

J32100, J32180, J33100

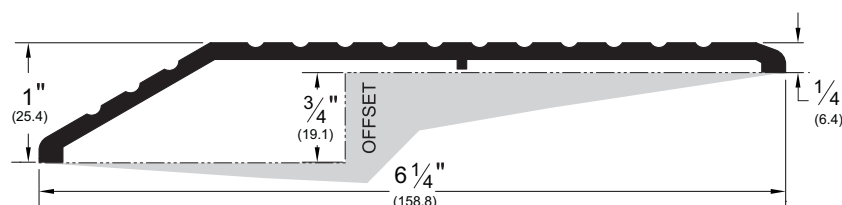

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

A (Mill Finished Aluminum) **B** (Mill Finish Architectural Bronze [Brass])

D (Dark Bronze Anodized) **G** (Gold Anodized)

BL (Black Anodized) and **PW** (Painted White) are special finishes available upon request.

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ASSA ABLOY

The global leader in
door opening solutions

Commercial Thresholds (Cont.)

- Unless exact net cut is specified, thresholds less than 48" are supplied $\frac{1}{2}$ " over length, and thresholds 48" and over are supplied 1" over length to allow for fitting.
- Unless otherwise specified, all thresholds are pre-drilled on the center line and are supplied with fasteners. Thresholds 8" in width or greater are supplied with two rows of fastener holes.
- For corrosive environments, stainless steel screws are available at an extra cost.
- Available with PemKote® non-skid coating. Please specify PemKote™ when ordering. Please furnish drilling instructions when ordering with PemKote™ as it is difficult to drill through.


Saddle Thresholds

171_

AVAILABLE

FINISHES:

A, B, BDG, D,
G, SN




172_

AVAILABLE

FINISHES:

A, B, D, G, SN




176_

AVAILABLE

FINISHES:

A, B, D, G




270_

AVAILABLE

FINISHES:

A, B, D, G




271_

AVAILABLE

FINISHES:

A, B, D, G, SN




272_

AVAILABLE

FINISHES:

A, B, D, G, SN




2548_

AVAILABLE

FINISHES:

A, D, G



2748_

AVAILABLE

FINISHES:

A, D, G




2749_

AVAILABLE

FINISHES:

A, D, G



AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

A (Mill Finished Aluminum) B (Mill Finish Architectural Bronze [Brass]) BDG (Bright Dip Gold Anodized)

D (Dark Bronze Anodized) G (Gold Anodized) SN (Satin Nickel Anodized)

BL (Black Anodized) and PW (Painted White) are special finishes available upon request.

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

ASSA ABLOY

The global leader in
door opening solutions

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

Commercial Thresholds (Cont.)

Stainless Steel Saddle Thresholds

- 11ga 430 Stainless Steel with #4 Brushed Finish
- Stainless Steel Thresholds are available in 36", 48", 72", 96" and 120" lengths only.


154SS

AVAILABLE
FINISHES:
SS (#4 Finish)




175SS

AVAILABLE
FINISHES:
SS (#4 Finish)




253SSFG

AVAILABLE
FINISHES:
SS (#4 Finish)



252x3SSFG

AVAILABLE
FINISHES:
SS (#4 Finish)

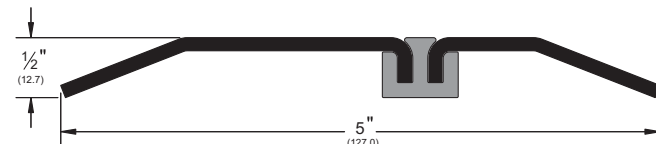


Heavy Duty Thresholds

- Ideal for heavy-duty, high-traffic and high weight-bearing applications, such as industrial facilities, schools, cafeterias, manufacturing buildings and hospitals
- Withstands coastal and high-humidity conditions
- Ultra-durable, extra thick extruded nickel-aluminum construction is guaranteed for ten (10) years


1715

AVAILABLE
FINISHES:
A, AK, D



2715

AVAILABLE
FINISHES:
A, AK, D



All items on this page are available with PemKote™ non-slip coating (see General Information section). Please specify "PemKote™" when ordering. Please furnish drilling instructions when ordering PemKote™ as it is difficult to drill through this coating.


Modular Heavy Duty Thresholds

- Modular construction without the expense of custom cast thresholds.
- Available in incremental width additions to accommodate a variety of applications (in 1" increments)

1717

AVAILABLE
FINISHES:
A, AK, D

Allow 5/8" door clearance.



1718

AVAILABLE
FINISHES:
A, AK, D

Allow 5/8" door clearance.



AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

A (Mill Finish Aluminum), **AK** (Pemkote Aluminum), **D** (Dark Bronze Anodized), **SS** (see individual part)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ASSA ABLOY

The global leader in
door opening solutions

Commercial Thresholds (Cont.)

Thermal Barrier Saddles


Black rigid polypropylene key between extrusions provides a thermal barrier (designated by "FG" Frost Guard following finish code)

273x3_FG

AVAILABLE

FINISHES:

A, B, D, G




273x4_FG

AVAILABLE

FINISHES:

A, B, D, G




254x4_FG

AVAILABLE

FINISHES:

A, B, D, G




255x5_FG

AVAILABLE

FINISHES:

A, B, D, G




252x2_FG

AVAILABLE

FINISHES:

A, B, D, G




252x3_FG

AVAILABLE

FINISHES:

A, B, D, G




253x4_FG

AVAILABLE

FINISHES:

A, B, D, G



Flexible Threshold


- Flexible PemkoPrene® joint allows threshold to bend up to 20-degrees in either direction
- Joint design allows for width to extend up to 1/4"
- Designed for a variety of applications (i.e. ramp, expansion joint cover, etc)

573x5_FG

AVAILABLE

FINISHES:

A, D

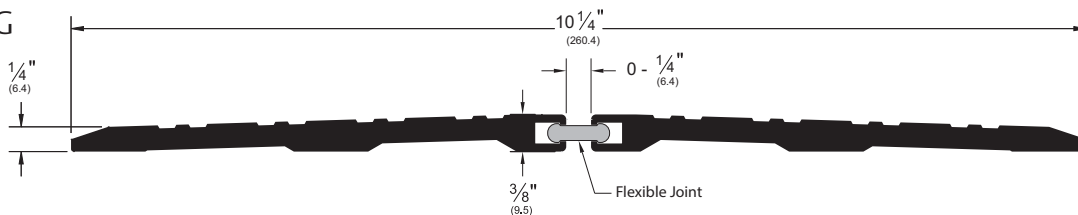

ASSA ABLOY

The global leader in
door opening solutions

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

A (Mill Finish Aluminum), B (Mill Finish Bronze [Brass]), D (Dark Bronze Anodized), G (Gold Anodized)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

Commercial Thresholds (Cont.)

Latching Panic Exit Saddle Thresholds

- Used in conjunction with surface applied vertical rod exit device, or as a stop and a seal at the bottom of a door.
- Also available with Eco-V® or Pile Seals; test ratings vary. Please see full line catalog or web.


2005_T

AVAILABLE

FINISHES:

A, B, D, G

Allow $\frac{3}{8}$ " door clearance.

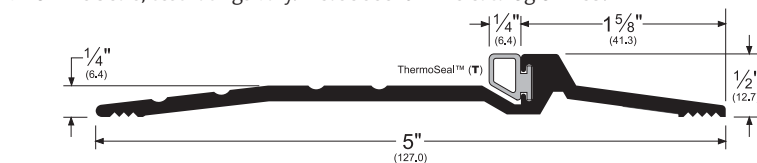

2006_T


AVAILABLE

FINISHES:

A, D, G

Allow $\frac{3}{8}$ " door clearance.

ADA compliant when butted to another flooring surface $\frac{1}{4}$ " or higher.

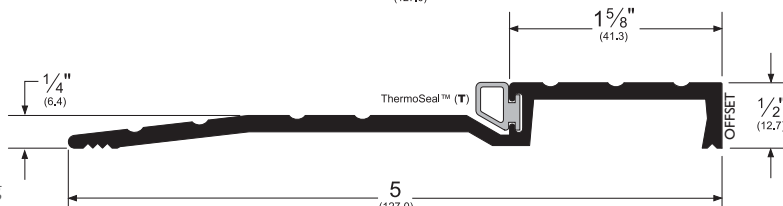


179_T

AVAILABLE

FINISHES:

A, B, D, G

Allow $\frac{1}{2}$ " door clearance.

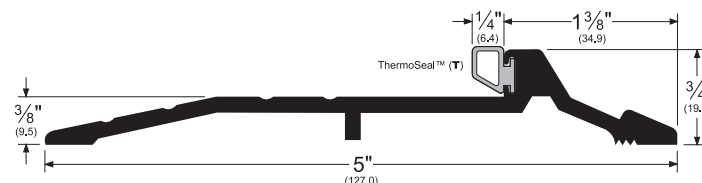


2009_PK

AVAILABLE

FINISHES:

A, D

Allow $\frac{3}{8}$ " door clearance.

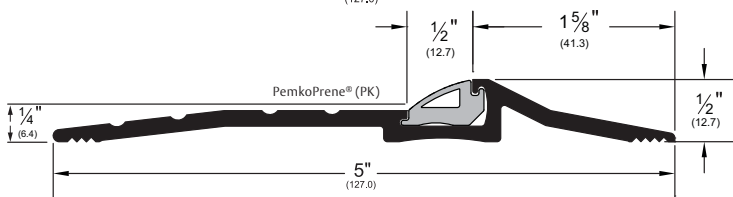

Latching Panic Exit Saddle Thresholds - Thermal Barrier

- Black rigid polypropylene key between extrusions provides thermal barrier (designated by "FG" Frost Guard following finish code)
- Used in conjunction with surface-applied vertical rod exit device, or as a stop and a seal at the bottom of door
- These units are not welded


252x226_FGT

AVAILABLE

FINISHES:

A, B, D, G

Allow $\frac{5}{8}$ " door clearance.

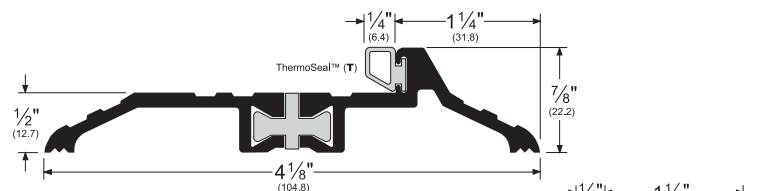


254x226_FGT

AVAILABLE

FINISHES:

A, B, D, G

Allow $\frac{5}{8}$ " door clearance.

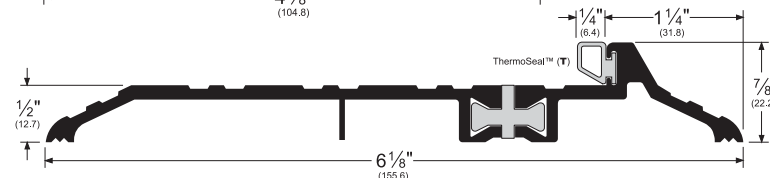


273x224_FGT

AVAILABLE

FINISHES:

A, D, G

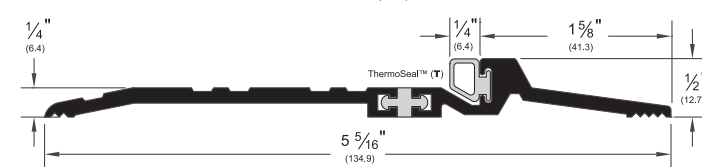


279x292_FGPK

AVAILABLE

FINISHES:

A, D

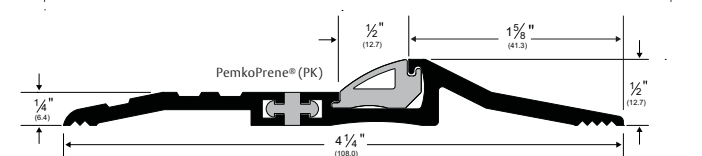

ALTERNATE INSERTS

252x226_FGP

254x226_FGP

273x224_FGT

252x226_FGV

254x226_FGV

273x224_FGT

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK

279x292_FGPK



AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

A (Mill Finish Aluminum) B (Mill Finish Extruded Bronze [Brass]) D (Dark Bronze Anodized) G (Gold Anodized)

NOTE: G is available with limited inventory

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ASSA ABLOY

The global leader in
door opening solutions


Commercial Thresholds (Cont.)

Eco-V® Thresholds

- Eco-V® thresholds create an ideal transition where two different pieces of carpet meet or carpet meets another surface under a door.
- Ideal for use in any high-traffic commercial installation, such as hotels and offices
- Eco-V® thresholds are manufactured of slightly softer material than competitive products. This aids in the cutting and fitting of the threshold and facilitates easier insertion of the carpet into the holding cavities on the carpet side(s) of the threshold
- Eco-V® thresholds are designed to work in conjunction with Pemko's 2173_V and 2343_V door shoes
- EV232_, EV2325_ and ADJ232V thresholds have been tested and approved under ADAAG-2010 (Amended); ICC/ANSI A117.1 and California Building Code, Title 24 for Barrier-Free Entry

EV232_


AVAILABLE
COLORS: BL, D
AVAILABLE LENGTHS:
36", 48", 73"

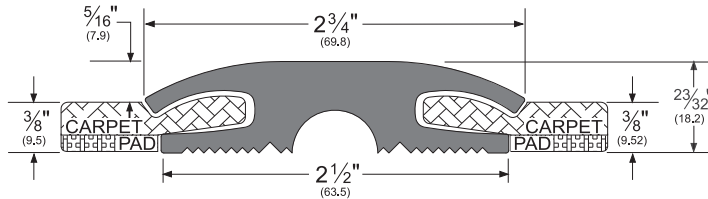

Serves as a transition where two pieces of carpet meet beneath an interior door.

EV2320_


AVAILABLE
COLORS: BL
AVAILABLE LENGTHS:
36", 48", 73"

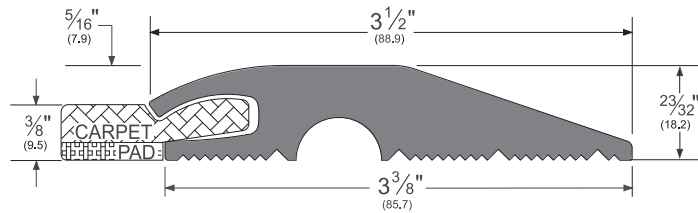

Serves as a transition where carpet meets concrete beneath an interior or exterior door.

EV2325_


AVAILABLE
COLORS: BL, D
AVAILABLE LENGTHS:
36", 48", 73"

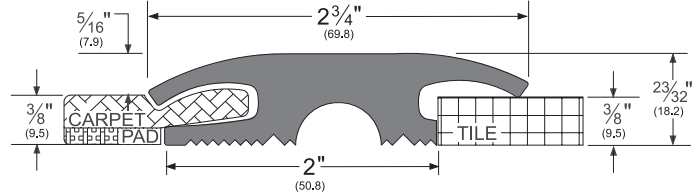

Serves as a transition where carpet meets tile beneath an interior door.

EV2322_

AVAILABLE
COLORS: BL
AVAILABLE LENGTHS:
36", 48", 73"

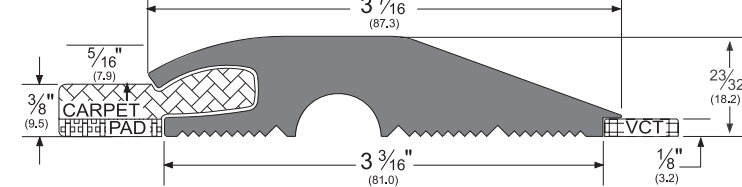


Serves as a transition where carpet meets tile beneath an interior door.

Adjustable Assembly Thresholds

ADJ232V8_

AVAILABLE
FINISHES:
BL, D
AVAILABLE LENGTHS:
36", 48", 73"

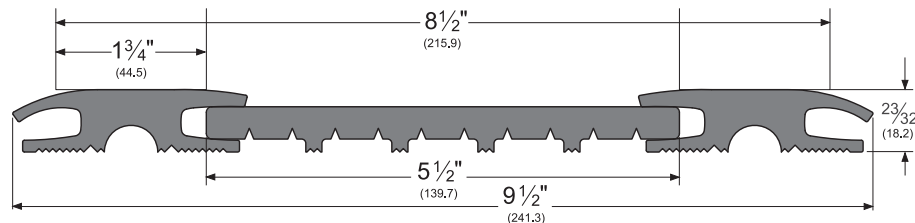

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

BL (Black) D (Dark Brown)

ASSA ABLOY

The global leader in
door opening solutions


800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

Modular Ramps


- Assemblies accommodate 1/2" to 2 1/4" floor offsets in meeting the 1:12 slope requirements of the "Americans with Disabilities Act". Even higher offsets can be accommodated by using the risers, RAMP13_ and RAMP14_
- "MR" in a product number denotes that one-pair of miter returns (and one-pair of miter return extenders, if applicable) are included. Otherwise, we recommend filling and feathering the threshold ends with grout. Do not leave threshold ends open
- Miter Returns are available for offsets up to 2 1/4". Larger offsets will require filling with additional material (not supplied) at the points where the offset is larger than 2 1/4".
- Assemblies are supplied with #10 stainless steel wood screws. Stainless steel machine screws and expansion shields are available at an extra cost
- Assemblies allow for custom fabrication (i.e. notching); please consult Pemko Customer Service
- Assemblies are provided NET length

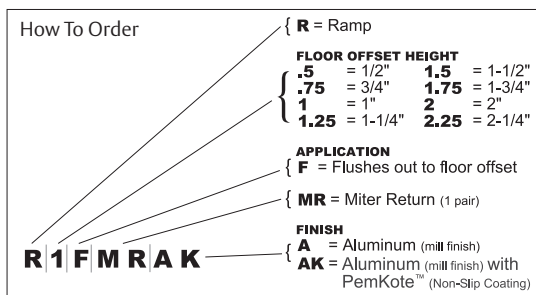

Modular Ramp Threshold Assemblies - Flush Applications

R1F_
R1FMR_

AVAILABLE FINISHES:
A, AK



Modular Ramp Threshold Assemblies Offset Applications (7" Top Plate)

R.5OS_
R.5OSMR_


AVAILABLE FINISHES:
A, AK



Modular Ramp Threshold Assemblies Offset Applications (3 1/2" Top Plate)


R.75OSS_
R.75OSSMR_

AVAILABLE FINISHES:
A, AK



Recycled Rubber Ramp Assembly

PART #	WIDTH "A" (door opening)	WIDTH "B" (total width)
RR1.25FMR36	36"	41"
RR1.25FMR48	48"	53"
RR1.25FMR60	60"	65"
RR1.25FMR72	72"	77"
RR1.25FMR96	96"	101"

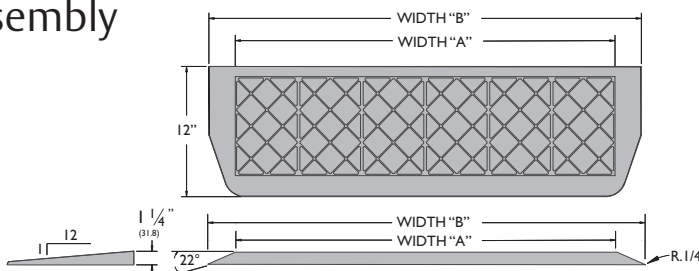

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

A (Mill Finish Aluminum) AK (Mill Finish Aluminum with PemKote™ Non-Slip Coating)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ASSA ABLOY

The global leader in
door opening solutions

Door Bottoms

Automatic Door Bottoms


- Self-leveling design; drop leads on plunger side and then levels out across its length across door length
- Adjusts between $\frac{1}{8}$ " and $\frac{3}{4}$ ". Maximum dimension between door bottom rail and floor surface is $\frac{3}{4}$ ".

4131_RL

AVAILABLE

FINISHES:

BDG, BSP, C, D, SN

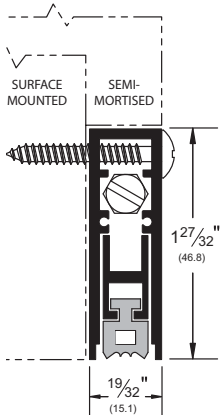


sponge EPDM (R)

4131_NBL

AVAILABLE

FINISHES:

BDG, BSP, C, D, SN

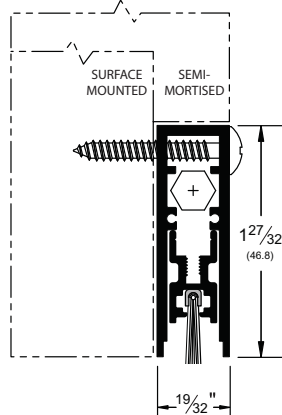


nylon brush (NB)

4301_RL

AVAILABLE

FINISHES:

BSP, C, D

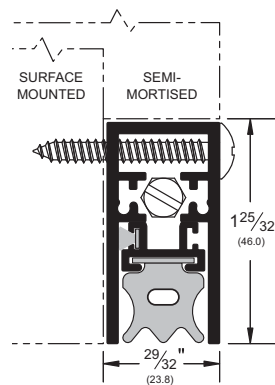

sponge EPDM (R)

ALTERNATE INSERTS FOR 4131



4131_PKL

AVAILABLE FINISHES:

BDG, BSP, C, D, SN



4131_SL

AVAILABLE FINISHES:

BDG, BSP, C, D, SN



ALTERNATE INSERT FOR 4301



4301_PKL

AVAILABLE FINISHES:

BSP, C, D




4301_NBL

AVAILABLE

FINISHES:

BSP, C, D,

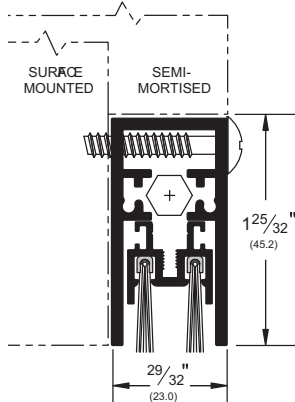


nylon brush (NB)

434_NBL

AVAILABLE

FINISHES:

A




nylon brush (NB)

434_RL

AVAILABLE

FINISHES:

A



sponge EPDM (R)

ALTERNATE INSERT FOR 434



434_PKL

AVAILABLE FINISH:

A



ASSA ABLOY

The global leader in
door opening solutions

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

A (Mill Finish Aluminum) BDG (Bright Dip Gold Anodized) BSP (Black Suede Powder) C (Clear Anodized)

D (Dark Bronze Anodized) SN (Satin Nickel Anodized). Special finishes available upon request.

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.


Door Bottoms (Cont.)

Automatic Door Bottoms

- Adjusts between $\frac{1}{8}$ " and $\frac{3}{4}$ ". Maximum dimension between door bottom rail and floor surface is $\frac{3}{4}$ " except where noted.

411_RL


AVAILABLE
FINISHES:
A



sponge EPDM (R)

411_NBL

AVAILABLE
FINISHES:
A




nylon brush (NB)

420_PKL

AVAILABLE
FINISHES:
A




For hollow metal doors.
Maximum drop is $\frac{1}{2}$ ".

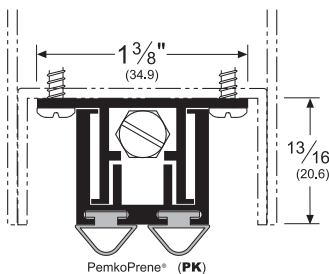

PemkoPrene (PK)

ALTERNATE INSERTS FOR 411



411_PKL



411_SL

ALTERNATE INSERTS FOR 420



420_VL




420_SL

Automatic Door Bottoms - Acoustic

- Non-handed
- Recommended gap under door is $\frac{1}{2}$ " for optimal acoustic performance max drop is $\frac{3}{4}$ "
- Internal mechanism allows bar to accommodate slight imperfections in floor materials
- STC411 end plate kit is K435; for doors narrower than $1\frac{3}{4}$ ", specify end plate kit K411
- STC4131 end plate kit is K4133C for Clear Anodized and K4133D for Dark Bronze Anodized


STC411_PK

AVAILABLE FINISHES: A
REPLACEMENT INSERT: PK4111 (BL)
ANSI: R3G324, R3G325



STC4131_PK

AVAILABLE FINISHES: BSP, C, D
REPLACEMENT INSERT: PK4111 (BL)
ANSI: R3G334, R3G335, R3G344, R3G345

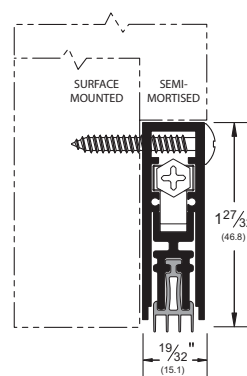


Door Bottoms (Cont.)

Door Shoes

- Where door bottoms are noted with both PemkoPrene® (PK) and Eco-V® (V) seals, these options have the same profile
- Slotted holes for easy adjustment
- Rain drip model is ideal for deflecting rain away from the bottom of door


211_V
211_PK

AVAILABLE FINISHES:
A, BSP, D, G




215_V
215_PK

AVAILABLE FINISHES:
A, BDG, BSP, D, G, PW, SN




2251_V
2251_PK

AVAILABLE FINISHES:
A, BSP, D, G




225_V
225_PK

AVAILABLE FINISHES:
A, BSP, D, G



222_V
222_PK


AVAILABLE FINISHES:
A, BSP, D, G



2211_V
2211_PK

AVAILABLE FINISHES:
A, BSP, D, G

Combination door shoe and kick plate with rain drip.

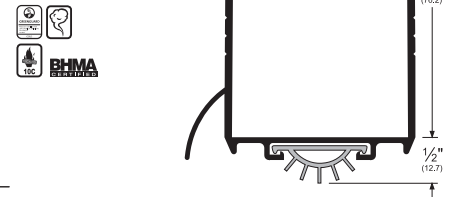

2170_V

AVAILABLE COLORS: D, W
AVAILABLE LENGTHS:
36", 48"
All Vinyl

Also available with unnotched insert:

2170_V36UN
2170_V48UN



2173_V

AVAILABLE FINISHES:
A, BDG, BSP, D, G, PW
Also available with unnotched insert:
2173_V36UN
2173_V48UN



2343_V

AVAILABLE FINISHES:
A, D, G


Also available with unnotched insert:

2343_V36UN
2343_V48UN




2113_V

AVAILABLE FINISHES:
A, BSP, D, G



2213_PK773

AVAILABLE FINISHES:
A, BSP, D, G

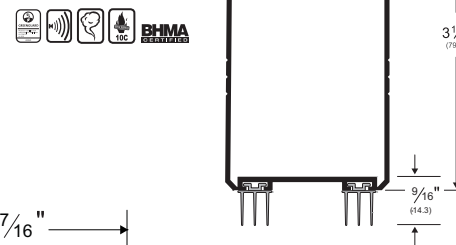


234_V
234_PK

AVAILABLE FINISHES:
A, D, G



3692_PK773

AVAILABLE FINISHES: A
AVAILABLE LENGTHS: 36", 48"



AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

A (Mill Finish Aluminum) BDG (Bright Dip Gold Anodized) BSP (Black Suede Powder)
D (Dark Bronze Anodized) G (Gold Anodized) PW (Painted White) SN (Satin Nickel Anodized)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

ASSA ABLOY

The global leader in
door opening solutions

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

Door Bottoms (Cont.)

Door Bottom Sweeps

315_N

AVAILABLE FINISHES:
B, BGD, BSP, C, D, G, PW, SN



321_N

AVAILABLE FINISHES:
BSP, C, D, G



3151_N

AVAILABLE FINISH:
BSP, C, D, G



3452_NB

AVAILABLE FINISHES:
BDG, BSP, C, D, G, PW, SN



345_NB

AVAILABLE FINISHES:
A, BDG, BSP, D, G, PW



345_V

345_PK
AVAILABLE FINISHES:
A, BDG, BSP, D, G, PW




Astragals and Meeting Stiles

Split Astragals and Meeting Stile Gasketing

- Astragals and meeting stiles may be mounted on pairs of doors wherein the gap meets the requirements of NFPA 80, "The clearance between the meeting edges of doors swinging in pairs on the pull side shall be $\frac{1}{8} \pm \frac{1}{16}$ (3.18mm $\pm$ 1.59mm) for steel doors and shall not exceed $\frac{1}{8}$ (3.18mm) for wood doors."
- When used as split astragals on double doors, two lengths must be ordered: one for each door
- Punched with slotted holes for adjustment


297_S

AVAILABLE FINISHES:
A, BDG, C, D, G, PW, SN

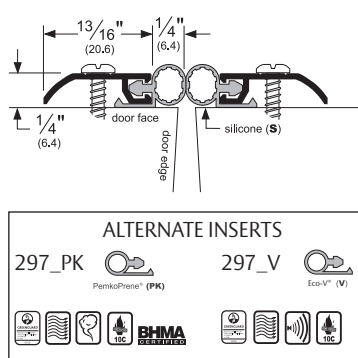


303_S

AVAILABLE FINISHES:
A, BDG, C, D, G, PW, SN

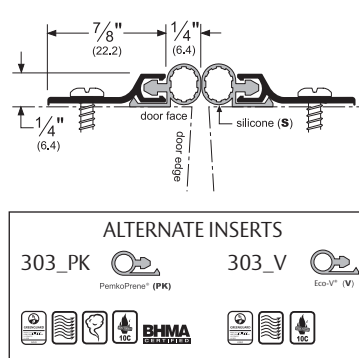

29310_S

AVAILABLE FINISHES:
C, D, G

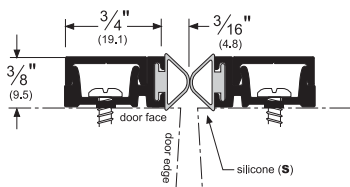

A (Mill Finish Aluminum) B (Architectural Bronze [Brass]) BDG (Bright Dip Gold Anodized) BSP (Black Suede Powder) C (Clear Anodized) D (Dark Bronze Anodized) G (Gold Anodized) PW (Painted White) SN (Satin Nickel Anodized)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.


ASSA ABLOY

The global leader in
door opening solutions

Astragals and Meeting Stiles (Cont.)


305_N

AVAILABLE FINISHES:
B, C, D, G

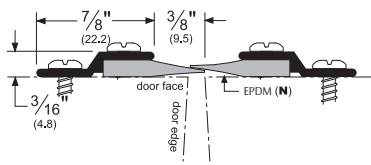

18041_NB



AVAILABLE FINISHES:
C, D, G, SN

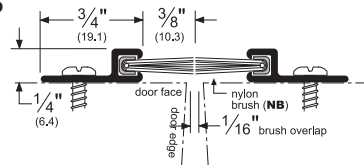

Pemko offers a broad line of nylon brush weatherstripping including the 18062_NB and 18100_NB, which are suitable for split astragal applications.


313_N

AVAILABLE FINISHES:
A, D, G

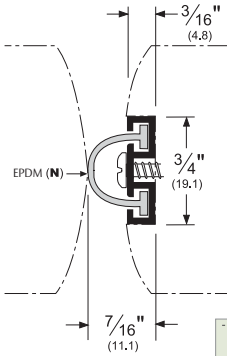


369_P

AVAILABLE FINISHES:
A, D, G




369_PK

AVAILABLE FINISHES:
A, D, G




369_S

AVAILABLE FINISHES:
A, D, G



369_PK773

AVAILABLE FINISHES:
A, D, G




Adjustable Astragals

- When used as split astragals on double doors, two lengths must be ordered: one for each door
- Available in 84", 96" and 120" lengths
- 351 is surface applied, a full mortise option is also available


NOTE: If you require split astragals in a metal-to-gasket configuration, you must order each leaf separately with your choice of insert.

351_/351_S

AVAILABLE FINISHES:
B, C, D, G

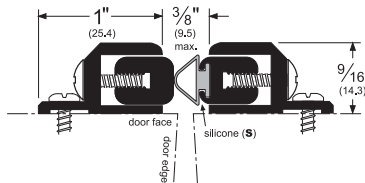


ALTERNATE INSERTS




Overlapping and "T" Astragals

355_S

AVAILABLE FINISHES:
B, BDG, C, D, G, PW, SN




ALTERNATE INSERTS




356_V

AVAILABLE FINISHES:
A, BDG, D, PW, SN



357_ with S88_

AVAILABLE FINISHES:
SP, SS



AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)
A (Mill Finish Aluminum) B (Mill Finish Extruded Bronze [Brass]) BDG (Bright Dip Gold Anodized) C (Clear Anodized)
D (Dark Bronze Anodized) G (Gold Anodized) PW (Painted White) SN (Satin Nickel Anodized)
SP (Galvannealed Steel) SS (Stainless Steel)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

ASSA ABLOY

The global leader in
door opening solutions


Brush Gasketing

- All brush seals consist of densely compressed nylon filaments encased in high quality aluminum retainers. These products are ideally suited for hollow metal and wood door (in-door sweep, jamb/header gasketing, and split astragal) applications. Also use Pemko's brush weatherstripping products on overhead doors, sectional doors, sliding doors, and automatic doors
- All brush seals greatly reduce the infiltration of light, air, wind, rain, and snow; prevent heat loss; control the penetration of smoke and fumes
- Brush remains flexible down to -40°F and has a melting point above 400°F
- UV stabilized, dependable, long-lasting, cost-effective
- Punched with slotted holes for adjustment (except 35° angle types which are drilled with 1/8" hole)

45° Aluminum Retainers


45041_NB

AVAILABLE
FINISHES:
C, D, G, PW




45061_NB

AVAILABLE
FINISHES:
C, D, G, PW




45062_NB

AVAILABLE
FINISHES:
C, D, G, PW




45100_NB

AVAILABLE
FINISHES:
C, D, G, PW




45175_NB

AVAILABLE
FINISHES:
C, D, G

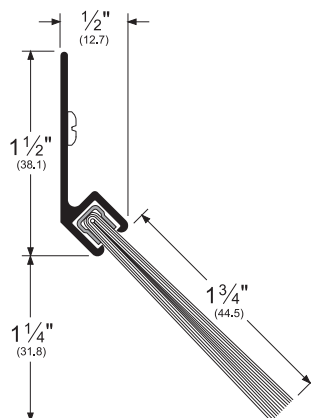

45250_NB


AVAILABLE
FINISHES:
C, D, G

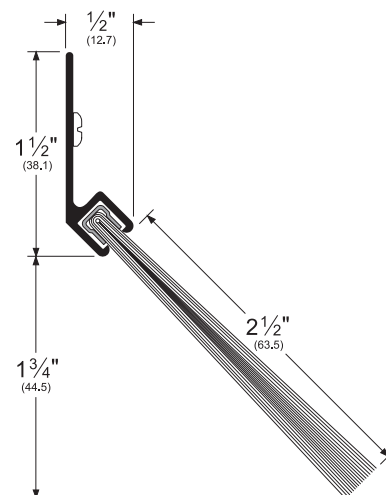

35° Aluminum Retainers


35041_NB

AVAILABLE
FINISHES:
C, D



35061_NB

AVAILABLE
FINISHES:
C, D



AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

C (Clear Anodized) D (Dark Bronze Anodized) G (Gold Anodized) PW (Painted White)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ASSA ABLOY


The global leader in
door opening solutions

Brush Gasketing (Cont.)

180° Aluminum Retainers


18400_NB

AVAILABLE
FINISHES:
C, D, G




18250_NB

AVAILABLE
FINISHES:
C, D, G




18175_NB

AVAILABLE
FINISHES:
C, D, G




18100_NB

AVAILABLE
FINISHES:
C, D, G,
PW




18062_NB

AVAILABLE
FINISHES:
C, D, G,
PW




18061_NB

AVAILABLE
FINISHES:
C, D, G, SN



18041_NB


AVAILABLE
FINISHES:
C, D, G, SN



Mortise Retainers


5061_NB

AVAILABLE
FINISHES:
A




5025_SB

AVAILABLE
FINISHES:
A




293100_NB

AVAILABLE
FINISHES:
C, D



29324_NB

AVAILABLE
FINISHES:
C, D, G



ASSA ABLOY

The global leader in
door opening solutions

180° Concealed Fastener Retainers

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)
A (Mill Finish Aluminum) C (Clear Anodized) D (Dark Bronze Anodized) G (Gold Anodized) PW (Painted White)
SN (Satin Nickel Anodized)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

Perimeter Gasketing


Adjustable Jamb Weatherstrip

379_S

AVAILABLE

FINISHES:
C, D, G

ADDITIONAL
INSERTS: PK, R

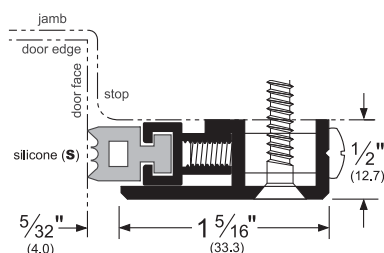


322_SPK

AVAILABLE

FINISHES:
C, D, G



PemkoPrene® (PK)




350_SR

AVAILABLE

FINISHES:
C, D, G



sponge EPDM (R)




350_SPK

AVAILABLE

FINISHES:
C, D, G



PemkoPrene® (PK)




Standard Perimeter Gasketing

303_S

AVAILABLE

FINISHES:
A, BDG, C, D,
G, PW, SN



ALTERNATE INSERTS

303_PK



303_V




Note: Alternate Inserts May Carry Different Ratings.
See Full Line Catalog Or Website For More Information.

29310_S

AVAILABLE

FINISHES:
C, D, G


ADDITIONAL
INSERTS: P, PK



297_S

AVAILABLE


FINISHES:
A, BDG, D, G,
PW, SN



312_R

AVAILABLE


FINISHES:
C, D, G



306_V

AVAILABLE

FINISHES:
A, BDG, D, G,
PW, SN



AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

A (Mill Finish Aluminum) BDG (Bright Dip Gold Anodized) C (Clear Anodized)

D (Dark Bronze Anodized) G (Gold Anodized) PW (Painted White) SN (Satin Nickel Anodized)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ASSA ABLOY

The global leader in
door opening solutions


Perimeter Gasketing (Cont.)

Heavy Duty - Standard Jamb

All gasketing shown below is sold individually


290_PK

AVAILABLE FINISHES: A, D, G

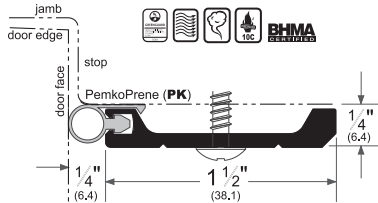


29045_NB

AVAILABLE FINISHES: A, D, G




2902_V

AVAILABLE FINISHES: A, D, G

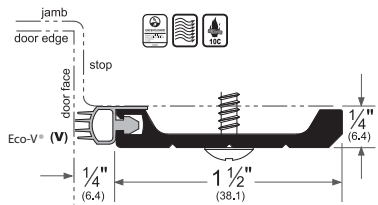

2903_V

AVAILABLE FINISHES: A, D, G

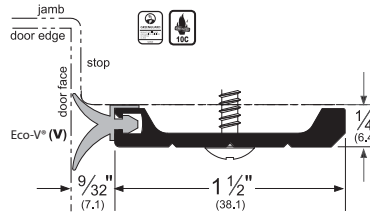

Solid Sections for Hardware Mounting -Head Section


All gasketing shown below is sold individually

2891_S

AVAILABLE FINISHES:

A, D, G


ADDITIONAL INSERTS: V, PK



2893_V

AVAILABLE FINISHES:


A, D



2892_V

AVAILABLE FINISHES:


A, D



28945_NB

AVAILABLE FINISHES:

A, D, G

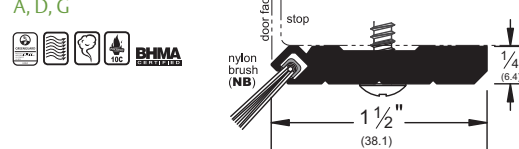


Acoustic Corner Pad

ACP112_

AVAILABLE COLORS:

BL, W



Note: Alternate Inserts May Carry Different Ratings.
See Full Line Catalog Or Website For More Information.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

A (Mill Finish Aluminum) D (Dark Bronze Anodized) G (Gold Anodized)

Corner Pads: BL (Black) W (White)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

ASSA ABLOY

The global leader in
door opening solutions

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.


Adhesive Gasketing

MicroShield® Antimicrobial Gasketing

- Extruded from high-temperature silicone with MicroShield®, a silver-based antimicrobial additive
- Effective between -58°F and 450°F
- Adhesive Backed
- Self-extinguishing and non-toxic
- Unaffected by sunlight, ozone and ultraviolet rays
- Exceeds the requirements for Antimicrobial Test JIS-Z-2801


AM44_

AVAILABLE FINISHES:
BL, C, D, W
AVAILABLE LENGTHS:
17', 18', 20', 21', 25', 30',
250', 510'



AM88_

AVAILABLE FINISHES:
BL, C, D, W
AVAILABLE LENGTHS:
17', 18', 20', 21', 25', 30',
250', 510'



MicroShield®

As part of their promise to provide innovative solutions to their customers, certain ASSA ABLOY Group brands offer the MicroShield® technology, a silver-based antimicrobial additive designed to inhibit the growth of bacteria.


MicroShield® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company.

SiliconSeal™ - Adhesive Backed Fire/Smoke Gasketing

- S44 is designed for tighter frames and demonstrates extremely low closing force
- S44 and S88 are available with perforations along length for behavioral health applications


S44_

AVAILABLE FINISHES:
BL, C, D, GR, W
AVAILABLE LENGTHS:
17', 18', 20', 21', 25',
30', 204', 510'




S77_

AVAILABLE FINISHES:
BL, C, D, W
AVAILABLE LENGTHS:
17', 18', 20', 21', 25',
30', 204', 510'




S88_

AVAILABLE FINISHES:
BL, C, D, GR, TAN, W
AVAILABLE LENGTHS:
17', 18', 20', 21', 25', 30',
204', 510'



S773_


AVAILABLE FINISHES:
BL, D, GR, W
AVAILABLE LENGTHS:
17', 18', 20', 21', 25',
30', 250', 500'



S776_

AVAILABLE FINISHES: BL
AVAILABLE LENGTHS: 17', 18', 20', 21'

- Designed for hollow metal and wood meeting stile applications
- Seal begins compressing at 3/8"; compresses to seal up to a 1/16" gap



Notes For All Adhesive Gasketing:

Storage and shelf life: All adhesive gaskets have a limited shelf life. This product must be installed within 6 months of purchase and must be stored between 50°F and 100°F.

Before installing: Thoroughly clean the frame to remove grease, dust or cleanser build-up (cleansing towelettes are included with product). Painted frame surface must be completely dry. Some hospital environments have wax or anti-bacterial cleanser build-up. As an alternative or substitute cleanser, use isopropyl (rubbing) alcohol. Note: Mineral spirits or other petroleum based cleaning products should NOT be used.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

BL (Black) C (Clear) D (Dark) GR (Gray) TAN (Tan) W (White)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ASSA ABLOY

The global leader in
door opening solutions

ADHESIVE GASKETING (CONT.)

PEMKOPRENE® - ADHESIVE BACKED FIRE/SMOKE GASKETING

PK33_

AVAILABLE


FINISHES:

BL, D, W

AVAILABLE LENGTHS:

17', 18', 20', 21',

25', 30', 510'



PK55_

AVAILABLE


FINISHES:

BL, D, W

AVAILABLE LENGTHS:

17', 18', 20', 21',

25', 30', 510'



HOT SMOKE SEAL EDGE SEALING FOR CATEGORY B DOORS

HSS1000_ IS A NON-ADHESIVE BACKED (MORTISE APPLIED) INTUMESCENT

HSS1000_


AVAILABLE

FINISHES:

GRAPHITE (NO CODE), W

AVAILABLE LENGTHS:

7', 8', 10', 18', 21', 24'



HSS2000_


AVAILABLE

FINISHES:

GRAPHITE (NO CODE), W

AVAILABLE LENGTHS:

7', 8', 10', 18', 21', 24'



HOT SMOKE SEAL/SILICONSEAL COMBINATION FIRE/SMOKE GASKETING

• MATERIAL IS SUPPLIED IN THREE LENGTHS: ONE FOR EACH JAMB AND ONE FOR THE HEADER. WHEN ORDERING, ORDER BY DOOR SIZE

(I.E. 3684 OR 3/0x7/0) AS SOME LENGTHS CAN BE SUPPLIED IN MORE THAN ONE OPENING SIZE COMBINATION.

HSS2000xS44_


AVAILABLE

FINISHES:

BL, C, D, GR, W

AVAILABLE LENGTHS:

18', 20', 21', 24'



HSS2000xS88_


AVAILABLE

FINISHES:

BL, C, D, GR, TAN, W

AVAILABLE LENGTHS:

18', 20', 21', 24'



ADHESIVE ASTRAGAL/MEETING STILE SEALS

S771_


AVAILABLE

FINISHES:

BL, C, D, GR, W

AVAILABLE LENGTHS:

7', 8', 9', 10'



S772_


AVAILABLE

FINISHES:

BL, C, D, GR, W

AVAILABLE LENGTHS:

7', 8', 9', 10'



S771x6_


AVAILABLE

FINISHES: BL, C

AVAILABLE

LENGTHS: 7', 8', 9', 10'

- Seal begins compressing at 5/16"; compresses to seal up to a 1/16" gap



HOSPITALITY PRODUCTS

Privacy Door Latch Bracket


- For use on Dunbartan, Reddiframe, and Timely Frames
- Available in a paint-grade galvanized steel or a BSP finish

PDLBRKT_

AVAILABLE COLORS:

Blank (Galvanized Steel),

BSP (Black Suede Powder)



Privacy Door Latch

- Easy to install, simple to operate
- ADA compliant
- Enhanced room privacy
- UL classified as a fire door accessory

PDL_



AVAILABLE FINISHES:

3 (Polished Brass)

4 (Satin Brass)

26 (Polished Chrome)

26D/15 (Dull Chrome/Satin Nickel)



ASSA ABLOY

The global leader in
door opening solutions

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
(see FULL LINE CATALOG or WEBSITE for finish chart)

Gasketing: BL (Black) C (Clear) D (Dark Brown) GR (Gray) TAN (Tan) W (White)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ACOUSTIC SEAL SETS

PEMKO supplies the appropriate acoustic components in sets. These product combinations are lab tested and have known decibel drops when used with sound-rated doors. Each kit includes gasketing, a door bottom or threshold, and a complete set of installation instructions. Installation instructions show the proper installation location for each component for optimal performance.

Item Number	Gasketing	Door Bottom	Threshold	Corner Pad
PEMKOSTCSET-1A	S773BL (Single Row) and S44BL (Single Row)	STC411APK		ACP112BL
PEMKOSTCSET-1B	S44BL (Two Rows)	STC411APK		ACP112BL
PEMKOSTCSET-1C	S442BL (Single Row) and S44BL (Single Row)	STC411APK		ACP112BL
PEMKOSTCSET-1D	303AS and S44BL (Single Row)	STC411APK		ACP112BL
PEMKOSTCSET-1E	312CR and S44BL (Single Row)	STC411APK		ACP112BL
PEMKOSTCSET-2A	S773BL (Single Row) and S44BL (Single Row)		2008APK	
PEMKOSTCSET-2B	S44BL (Two Rows)		2008APK	
PEMKOSTCSET-2C	S442BL (Single Row) and S44BL (Single Row)		2008APK	
PEMKOSTCSET-2D	303AS and S44BL (Single Row)		2008APK	
PEMKOSTCSET-2E	312CR and S44BL (Single Row)		2008APK	
PEMKOSTCSET-3A	S773BL (Single Row) and S44BL (Single Row)	3692APK773BL		
PEMKOSTCSET-3B	S44BL (Two Rows)	3692APK773BL		
PEMKOSTCSET-3D	303AS and S44BL (Single Row)	3692APK773BL		
PEMKOSTCSET-3E	312CR and S44BL (Single Row)	3692APK773BL		
PEMKOSTCSET-4A	S773BL (Single Row) and S44BL (Single Row)		2009APK	
PEMKOSTCSET-4B	S44BL (Two Rows)		2009APK	
PEMKOSTCSET-4D	303AS and S44BL (Single Row)		2009APK	
PEMKOSTCSET-4E	312CR and S44BL (Single Row)		2009APK	

How To:

1. Locate the Sealed-in-Place (inoperable) rating for your door.
2. Determine the maximum allowable drop for your opening (i.e. -1 db). Note: the numbers are represented as negative numbers as they will decrease your inoperable rating by the number shown (i.e. 45 using a -1 kit will decrease the inoperable rating from 45 to an operable of 44)
3. Find a number in the column below your door's inoperable rating that will keep your opening in the allowable range.
4. Select a kit (or one of the kits given if Alternate Kits are shown), place it on your Purchase Order and add your opening size in inches (i.e. a 3/0 x 7/0 opening will be ordered as a 3684).

NOTE: More kits are available. Check the web site for full offering

Item Number	Sealed-in-Place Door STC Rating				
	58 to 54	53 to 49	48 to 46	45 to 43	<42
PEMKOSTCSET-1A Alternate Kits: 1B, 1C, 1D, 1E		-2	-2	-1	0
PEMKOSTCSET-2C	-3	-2	-2	-1	0
PEMKOSTCSET-2D Alternate Kits: 2A, 2B	-3	-2	-1	-1	0
PEMKOSTCSET-2E	-2	-2	-1	-1	0
PEMKOSTCSET-3A		-2	-1	0	0
PEMKOSTCSET-3D		-2	-1	0	0
PEMKOSTCSET-3E	-2	-2	-1	0	0
PEMKOSTCSET-4A				0	0
PEMKOSTCSET-4B				0	0
PEMKOSTCSET-4D				0	0
PEMKOSTCSET-4E				0	0

NOTE: A seal set cannot increase the sealed-in-place rating; a zero drop is the best performance any seal set can provide.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

A (Mill Finish Aluminum) C (Clear Anodized) D (Dark Bronze Anodized)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ASSA ABLOY

The global leader in
door opening solutions

Sliding and Folding Hardware


Sliding 200 Series

Features:

- Needle bearing hangers for smooth operation
- 200 lb. panel capacity
- Galvanized steel track 280
- Aluminum track 280C

H200A Kits Include:

- 1 ea 280C Track
- 2 ea H222R1 Hangers
- 1 ea 102N Nylon Guide
- 2 ea TELS-14KIT Stops
- 1 ea Adjusting Wrench and Mounting Hardware

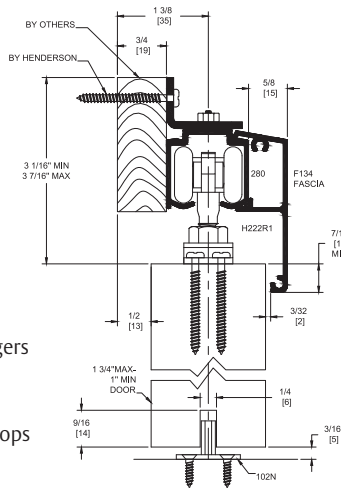

Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
H200A/4	Aluminum	48"	24"
H200A/5-4	Aluminum	64"	32"
H200A/6	Aluminum	72"	36"
H200A/7	Aluminum	84"	42"
H200A/8	Aluminum	96"	48"
H200A/10	Aluminum	120"	60"
H200A/12	Aluminum	144"	72"
H200/6	Steel	72"	36"
H200/8	Steel	96"	48"

Folding 100 Series

FOR FOLDING DOORS AND ROOM DIVIDERS TO 100 LBS.

High quality hardware makes medium weight folding doors efficient and easy-to-use. Two and four leaf kits are available


FOUR PANEL:

HF4/100A Kits Include:

- 1 ea 280C Track
- 2 ea 283 Hangers
- 2 ea 289T Top Pivots
- 2 ea 289B Bottom Pivots
- 6 ea 282HD Hinges
- 2 ea 106HF/94 Guide
- 1 ea 94A Guide Channel
- 1 ea Adjusting Wrench and Mounting Hardware

OPTIONS:

- Mounting Bracket 281 available as 5 pack only, 2815
- Bottom Channel 94A
- Threshold 971A
- Finish: 280A Track available in Clear Anodized (C)

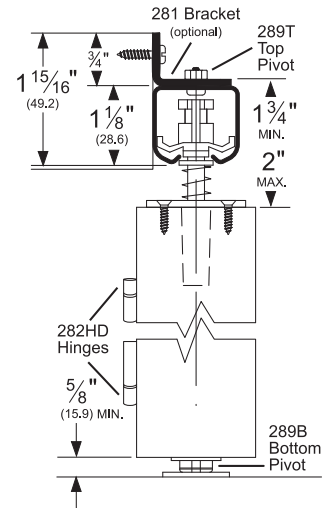

Standard Kit Sizes			
Part Number	Material	# of Panels	Track Length
HF2/100A/2	Aluminum	2	24"
HF2/100A/2'6	Aluminum	2	30"
HF2/100A/3	Aluminum	2	36"
HF2/100A/4	Aluminum	2	48"
HF4/100A/4	Aluminum	4	48"
HF4/100A/5	Aluminum	4	60"
HF4/100A/6	Aluminum	4	72"
HF4/100A/8	Aluminum	4	96"
HF2/100/4*	Steel	2	48"
HF4/100/8*	Steel	4	96"

Bypass Track Series

For Bypassing Panels to 200 lbs.



- Fits 1 3/8" and 1 3/4" doors
- Needle-bearing wheels for ultra smooth performance
- Load capacity 200 lbs. (2 hangers)
- Extruded aluminum track

HBP200A Kits Include:

- 1 ea 2802C Track
- 4 ea H222R1 Hangers
- 2 ea 102N Nylon Guide
- 4 ea TELS-14KIT Stops
- 1 ea Adjusting Wrench and Mounting Hardware

OPTIONS:

- Hardware Kit
- Mounting Bracket
- Track
- Track Stop (bumper)
- Bottom Channel
- Fascia, Snap-On
- Roller Guide
- H200 PACK
- 2812
- 280D
- 287HD
- 94A
- F134C
- F134D
- 106R/94
- Dual Guide Channel
- Polypropylene Guide Rail
- 2802BT
- EPD3BL for use with 102N
- FINISHES:
- 280C Track available in Clear Anodized (C)
- F134C Fascia in Clear Anodized (C)

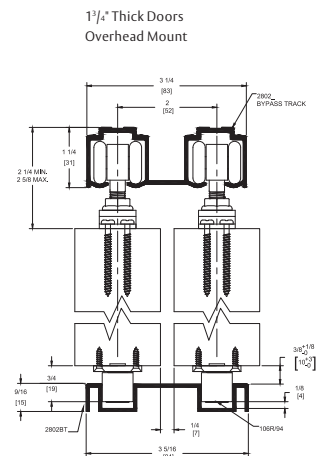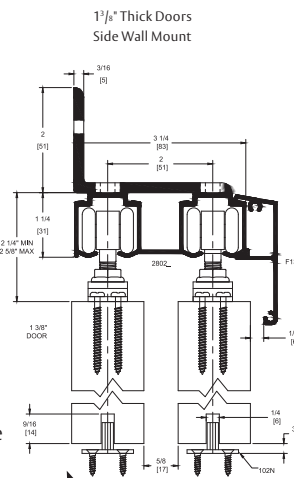

NOTE: Route door 9/16" deep by 1/4" wide to receive 102N Guide.

ASSA ABLOY

The global leader in door opening solutions

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

Sliding and Folding Hardware (Cont.)

W60 Series for Wood Doors

Configurations:

- Single
- Bi-parting

Features:

- Made of 304 stainless steel
- Nylon coated stainless steel wheel for smooth operation
- 176 lb. panel capacity
- 5 year warranty

Finishes:

- Brushed Stainless Steel (W60)
- Dark Bronze Stainless Steel (W60D)
- Polished Stainless Steel (W60P)

W60 Kits Include:

- 1 ea **BAR/_** Stainless Steel Track
- **BRACKET2** Stainless Steel Wall Brackets
- 2 ea **62** Stainless Steel Hangers
- 1 ea **WOODGUIDE** Stainless Steel Guide
- 2 ea **STOP2** Stainless Steel Stops Mounting Hardware



NOTE: If ordering individual parts in the optional Dark Bronze or Polished finishes, be sure to include a suffix "D" for Dark Bronze or "P" for Polished Stainless

Options: See page 39


- Bottom Channel **94A**
- Roller Guide **106R/94**
- Mortise Guides **102N**
- Polypropylene Guide Rail **EPD3BL For Use With WOODGUIDE**

Installations:

- Side Wall Mount (only)

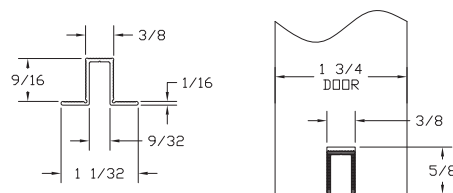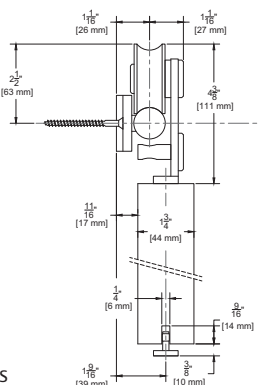

NOTE: Alternate route dimension when using optional EPD3BL



Standard Kit Sizes

Part Number	Material	Track Length	Door Width
W60/6	304 Stainless Steel	78 ³ / ₄ "	36"
W60/8	304 Stainless Steel	98 ⁷ / ₁₆ "	48"
W60D/6	304 Dark Bronze Stainless Steel	78 ³ / ₄ "	36"
W60D/8	304 Dark Bronze Stainless Steel	98 ⁷ / ₁₆ "	48"
W60P/6	304 Polished Stainless Steel	78 ³ / ₄ "	36"
W60P/8	304 Polished Stainless Steel	98 ⁷ / ₁₆ "	48"

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see FULL LINE CATALOG or WEBSITE for finish chart)

B (Beige Powder Coat) **D** (Dark Bronze Duranodic Powder Coat) **G** (Gray Primer Powder Coat)

800-824-3018 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog



Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ASSA ABLOY

The global leader in
door opening solutions

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience

ASSA ABLOY

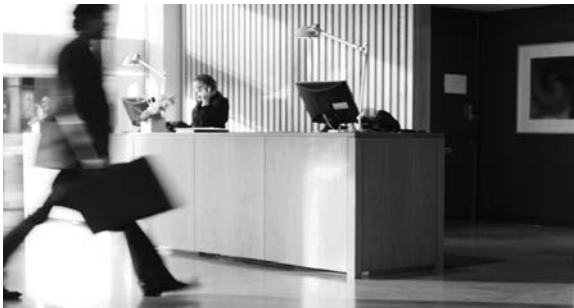

ASSA ABLOY
5535 Distribution Drive
Memphis, TN 38141
websales@pemko.com
www.assaabloydooraccessories.us

MEMPHIS, TN USA
P: 800 824-3018
F: 800 243-3656

VENTURA, CA USA
P: 800 283-9988
F: 800 283-4050

VANCOUVER, BC CA
P: 877 535-7888
F: 877 535-7444

TORONTO, ON CA
P: 877 535-7888
F: 877 535-7444