

Thermal Barrier Saddles


- Black rigid polypropylene key between extrusions provides a thermal barrier (designated by "FG" Frost Guard following finish code)

273x3_FG

AVAILABLE FINISHES: A, B, D, G

ANSI (aluminum): J32139, J32190, J32193

ANSI (brass): J12139, J12190, J12193




273x4_FG

AVAILABLE FINISHES: A, B, D, G

ANSI (aluminum): J32139, J32190, J32193

ANSI (brass): J12139, J12190, J12193




274x4_FG

AVAILABLE FINISHES: A, B, D, G

ANSI (aluminum): J32139, J32190, J32193


ANSI (brass): J12139, J12190, J12193



2746x6_FG

AVAILABLE FINISHES: A, D, G


ANSI (aluminum): J32139, J32190, J32193



256x6_FG

AVAILABLE FINISHES: A, D, G

ANSI (aluminum): J32139, J32190, J32193

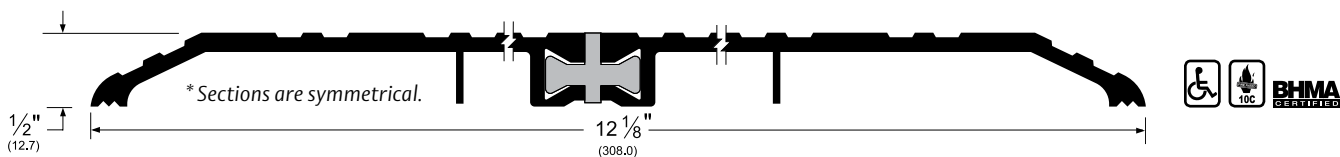

ASSA ABLOY

The global leader in
door opening solutions

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)
A (Mill Finish Aluminum) B (Mill Finish Extruded Bronze [Brass]) D (Dark Bronze Anodized) G (Gold Anodized)


NOTE: G is available with limited inventory

Copyright © 2015, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.

Thermal Barrier Saddles (Cont.)


255x5_FG

AVAILABLE FINISHES: A, B, D, G
ANSI (aluminum): J32139, J32190, J32193
ANSI (brass): J12139, J12190, J12193

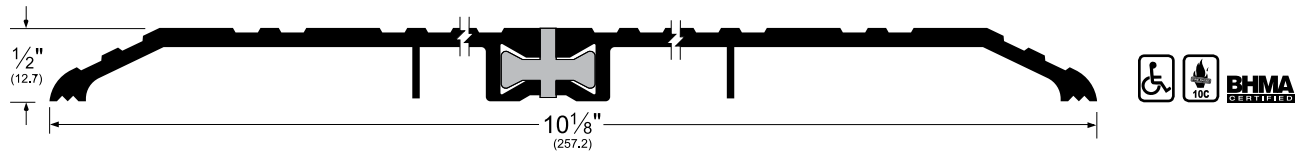


252x2_FG

AVAILABLE FINISHES: A, B, D, G
ANSI (aluminum): J32139, J32190, J32193
ANSI (brass): J12139, J12190, J12193

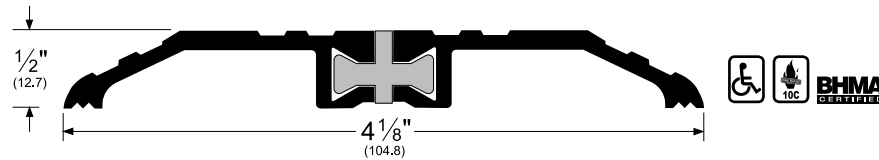


252x3_FG

AVAILABLE FINISHES: A, B, D, G
ANSI (aluminum): J32139, J32190, J32193
ANSI (brass): J12139, J12190, J12193

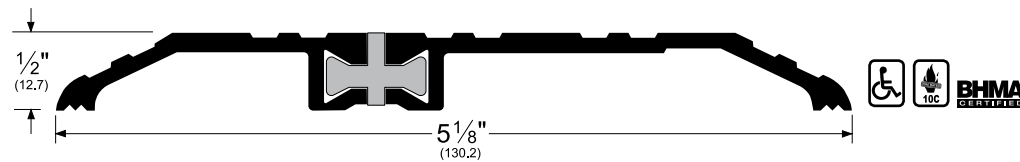


253x3_FG

AVAILABLE FINISHES: A, B, D, G
ANSI (aluminum): J32139, J32190, J32193
ANSI (brass): J12139, J12190, J12193

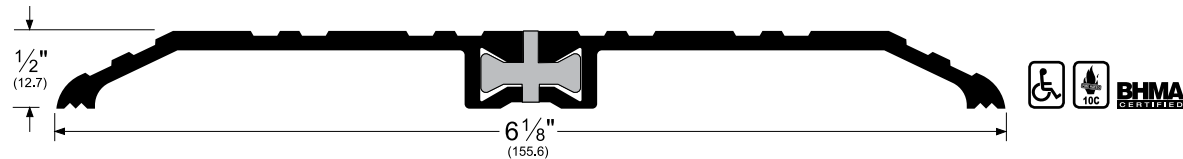

253x4_FG

AVAILABLE FINISHES: A, B, D, G
ANSI (aluminum): J32139, J32190, J32193
ANSI (brass): J12139, J12190, J12193

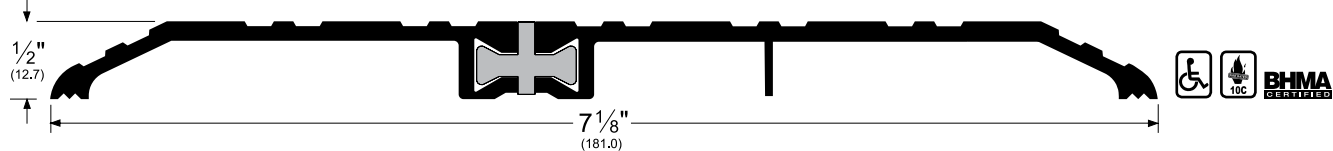

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)
A (Mill Finish Aluminum) B (Mill Finish Extruded Bronze [Brass]) D (Dark Bronze Anodized) G (Gold Anodized)


NOTE: G is available with limited inventory

Thermal Barrier Saddles (Cont.)

253x6_FG

AVAILABLE FINISHES: A, D, G

ANSI (aluminum): J32139, J32190, J32193

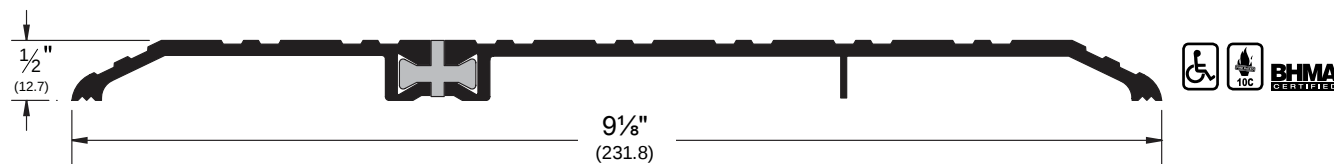


254x4_FG

AVAILABLE FINISHES: A, B, D, G

ANSI (aluminum): J32139, J32190, J32193

ANSI (brass): J12139, J12190, J12193

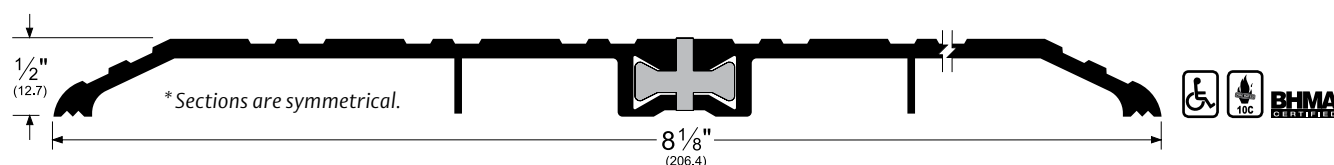


254x5_FG

AVAILABLE FINISHES: A, B, D, G

ANSI (aluminum): J32139, J32190, J32193

ANSI (brass): J12139, J12190, J12193

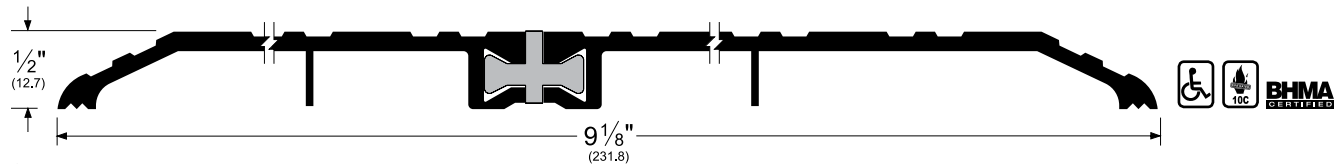


Stainless Steel Thermal Barrier Threshold

- Black rigid polypropylene key between extrusions provides a thermal barrier (designated by "FG" Frost Guard following finish code)

252x2SSFG

AVAILABLE FINISH: SS (#4, Brushed Finish)

ANSI: J52330, J52339, J52390, J52393

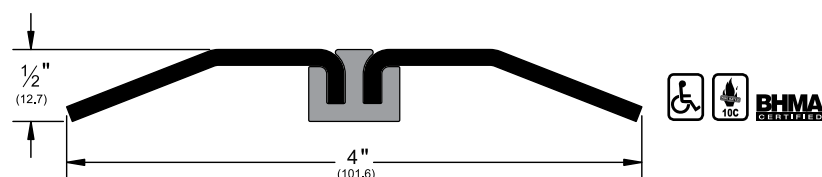

NOTE: Products shown in this section may not be drawn to scale.

ASSA ABLOY

The global leader in
door opening solutions

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)
A (Mill Finish Aluminum) B (Mill Finish Extruded Bronze [Brass]) D (Dark Bronze Anodized) G (Gold Anodized)
SS (See Individual Part)

NOTE: G is available with limited inventory

Copyright © 2015, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.