


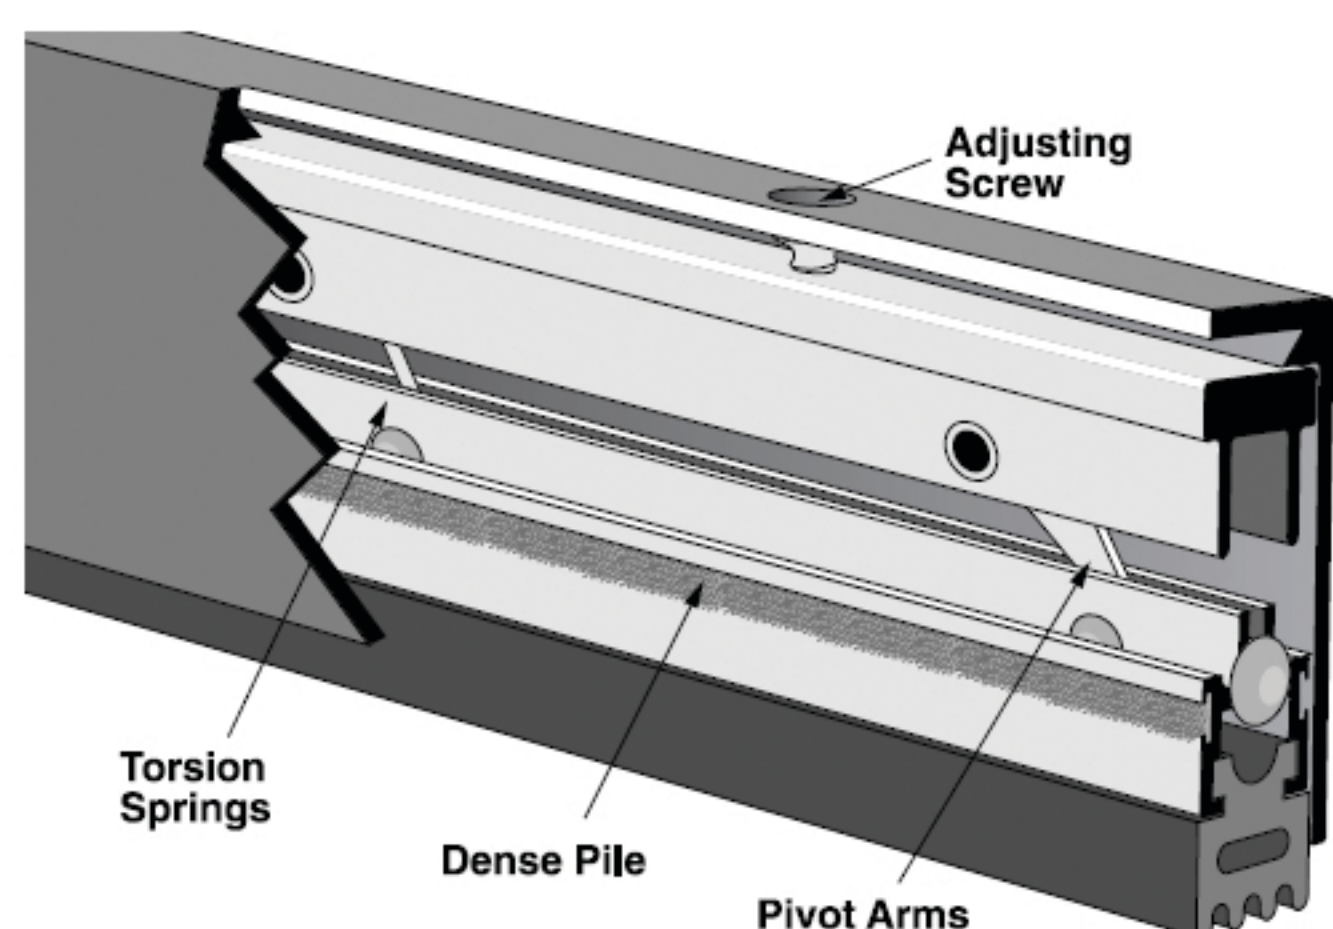


Automatic door bottoms: 18" to 24" cannot be trimmed. 36", 42" and 48" can be trimmed up to 3". Other sizes can be trimmed up to 1". **Part 370 can be trimmed up to 2" in all sizes.**

The Reese No. 521 Automatic Door bottom offers positive sound control for all swinging doors up to 8 feet wide. Our patented design combines low operating force with an adjustable sealing bar. Used in conjunction with Reese No. 599 Head and Jamb Seal, it achieved an amazing STC Rating of 46! See page 27 for test results.



PLEASE NOTE:

Door bottoms are not designed to seal directly on carpet. For best results door bottoms should seal on a solid surface. The solid surface should be positioned above the level of the floor covering on either side of the door. Door bottoms are field reversible and can be used in semi-mortised applications.

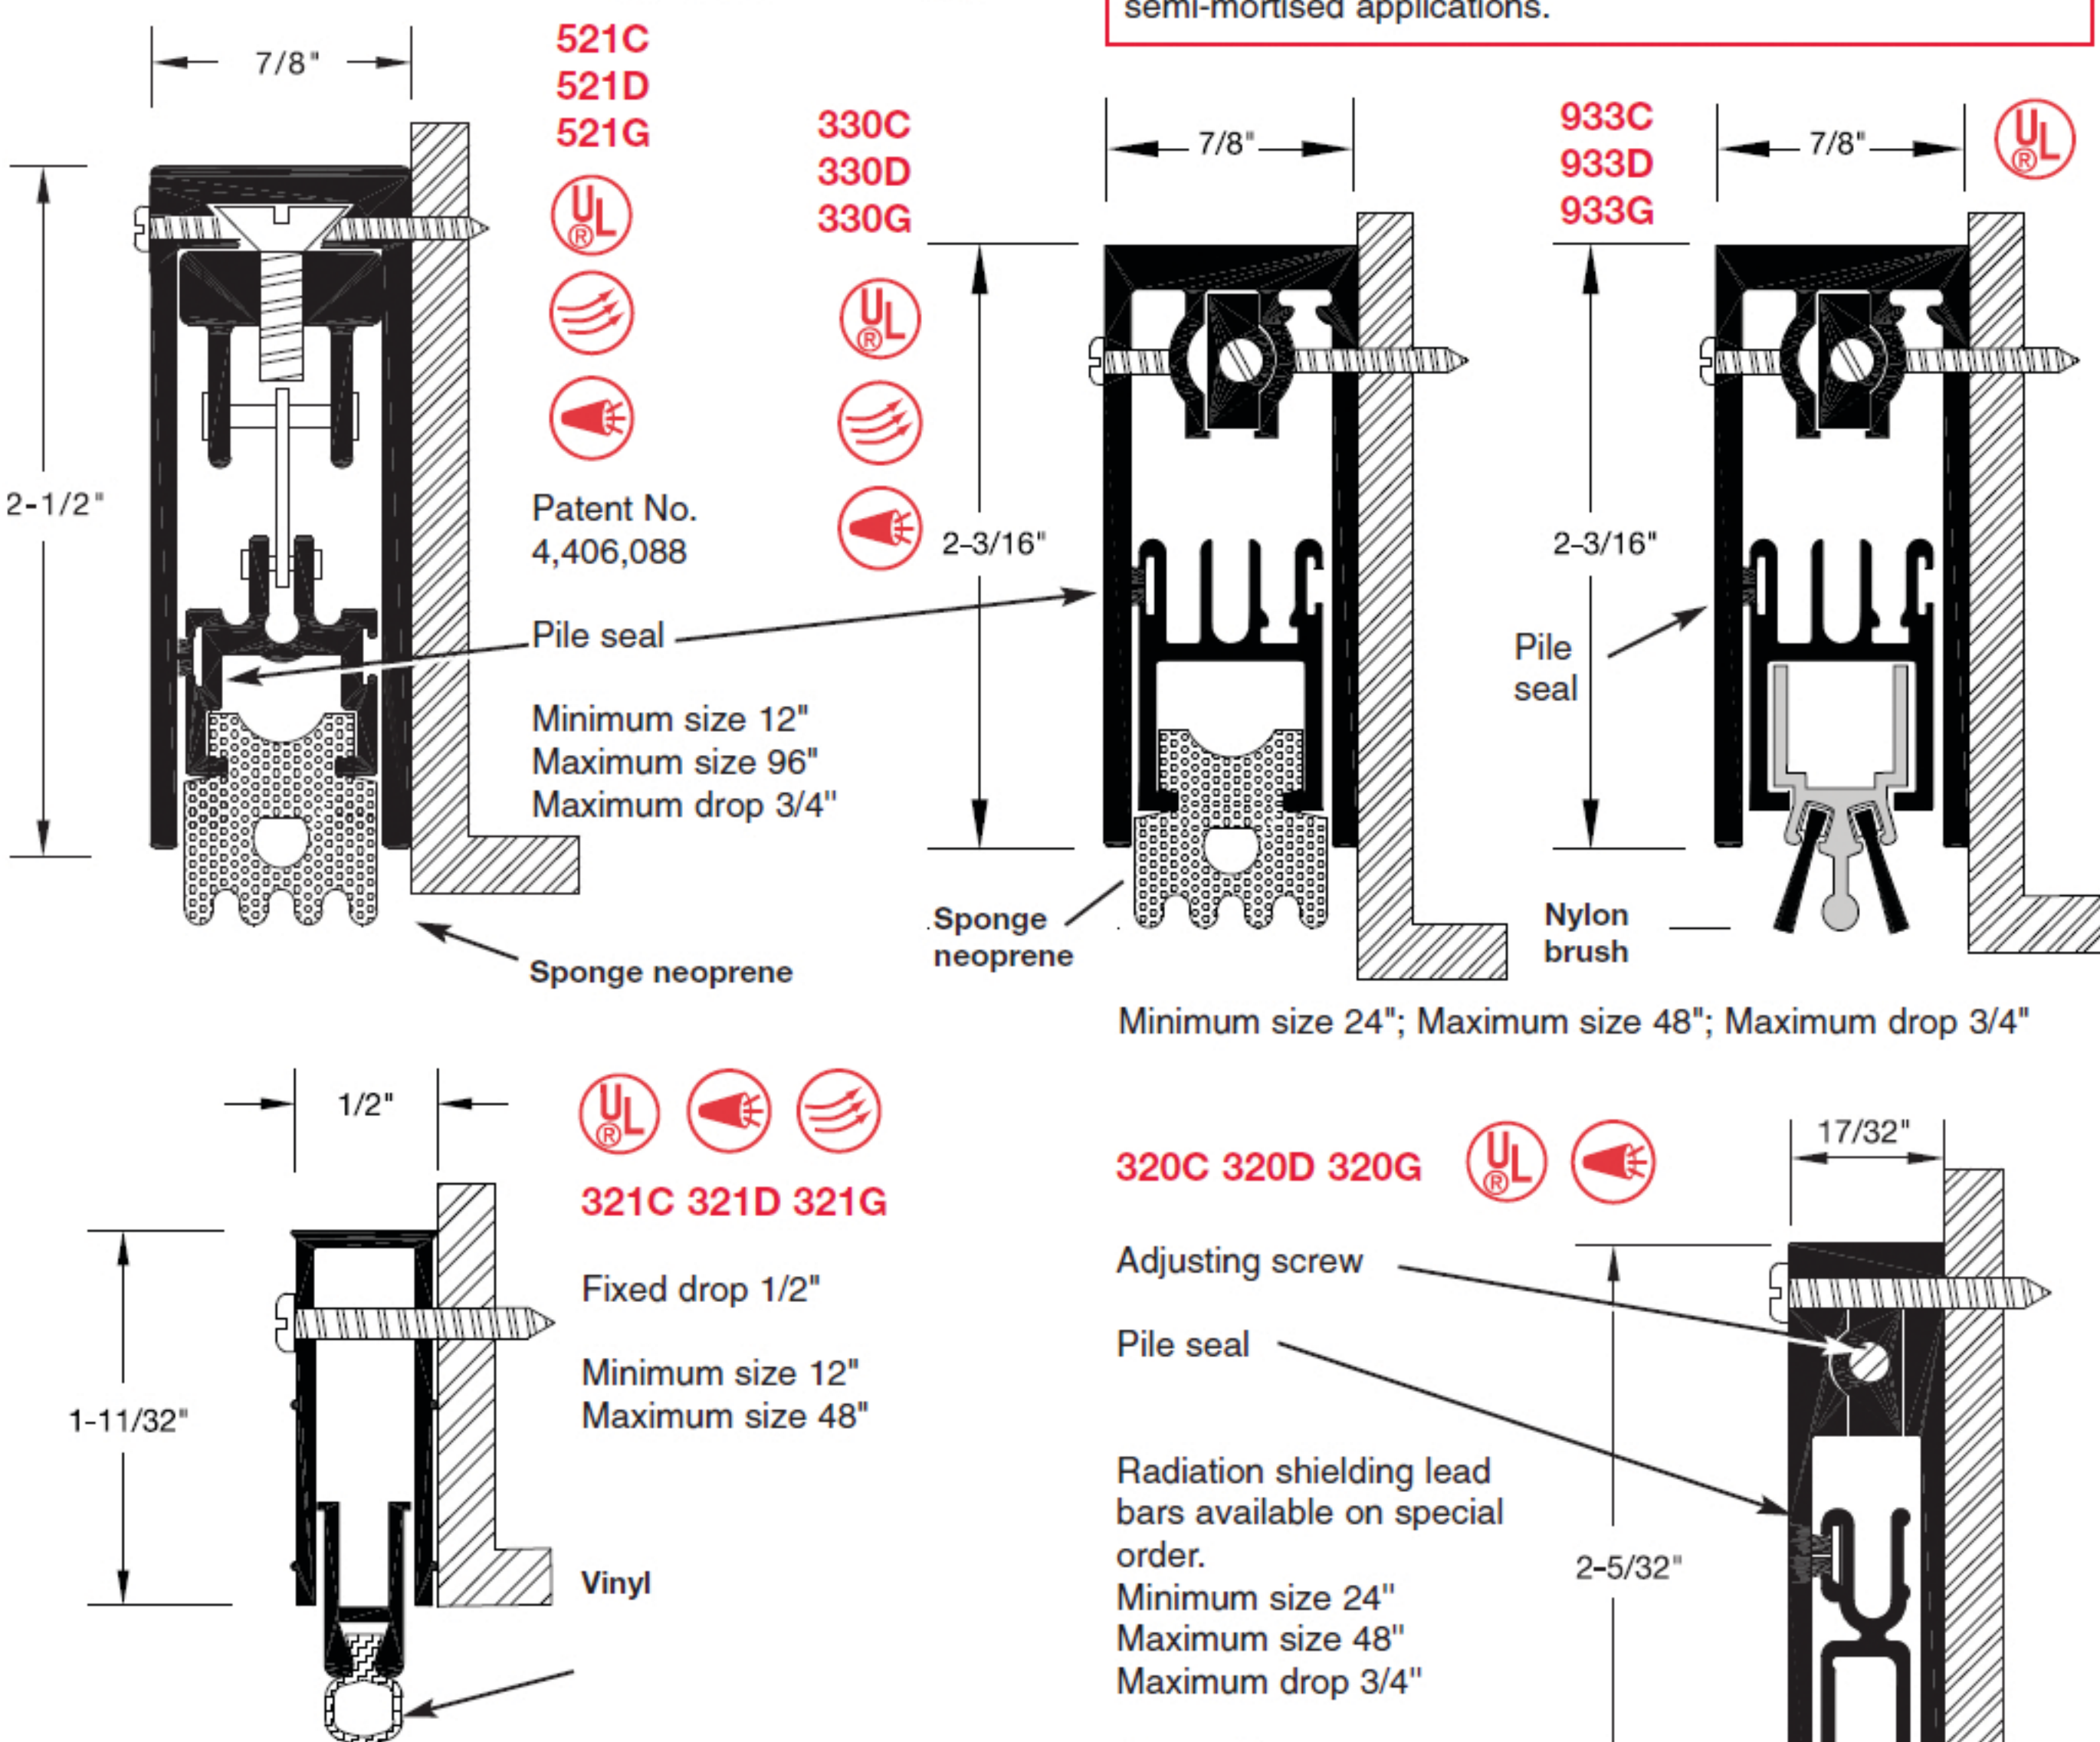

Automatic door bottom sizes: 18" to 24" cannot be trimmed. 36", 42" and 48" can be trimmed up to 3". Other sizes can be trimmed up to 1". **Part 370 can be trimmed up to 2" in all sizes.**


To receive UL label on parts, add prefix "F-" when ordering

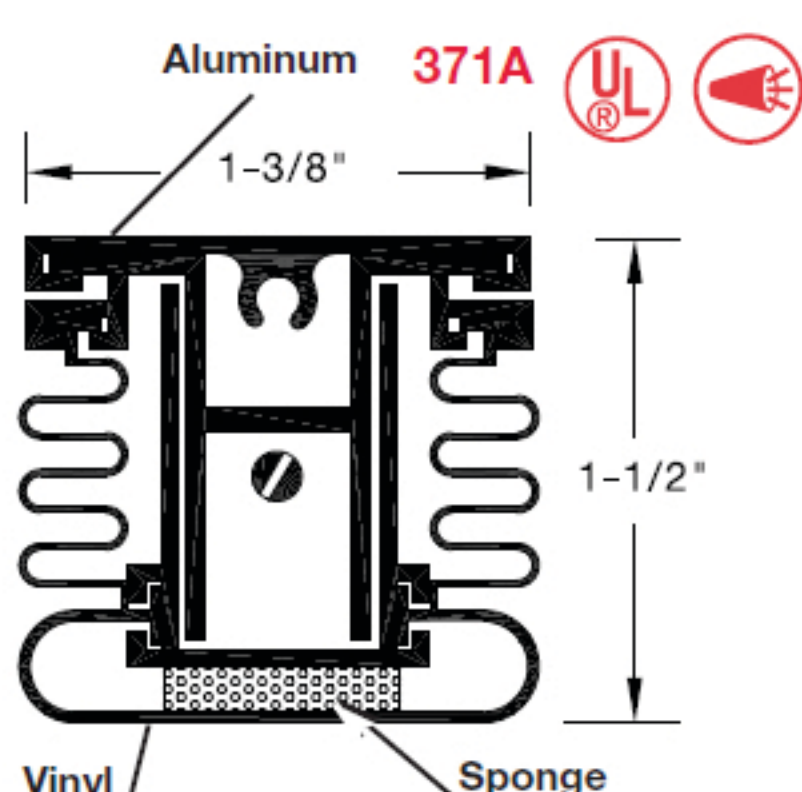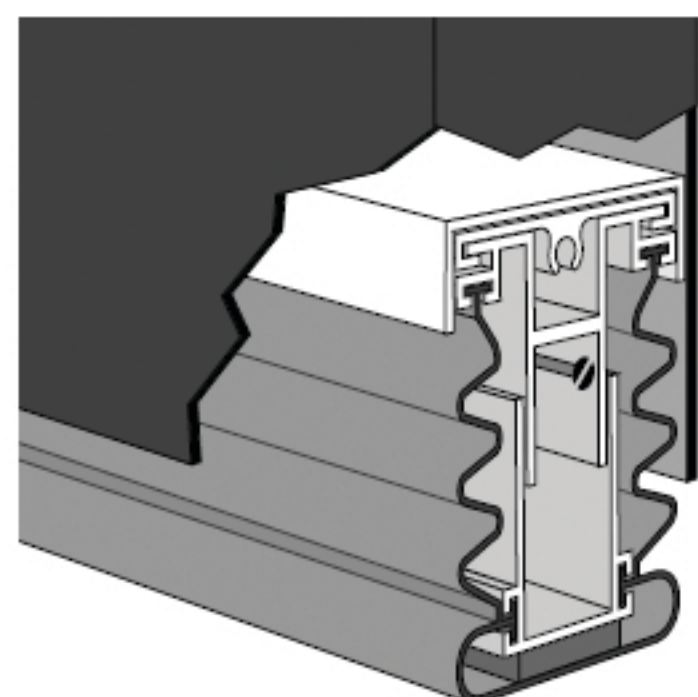

Now for the first time, an automatic door bottom with a flexible accordion type gasket that provides a full 1-1/4" surface contact with the floor. Helps prevent sound and air from passing over the dropbar. Sound transmission loss ratings up to STC 50 have been achieved by several door manufacturers using the 371 door bottom in conjunction with their sound rate door systems.

Minimum size 24"
Maximum size 60"
Maximum drop 3/4"

Patent 3,871,133

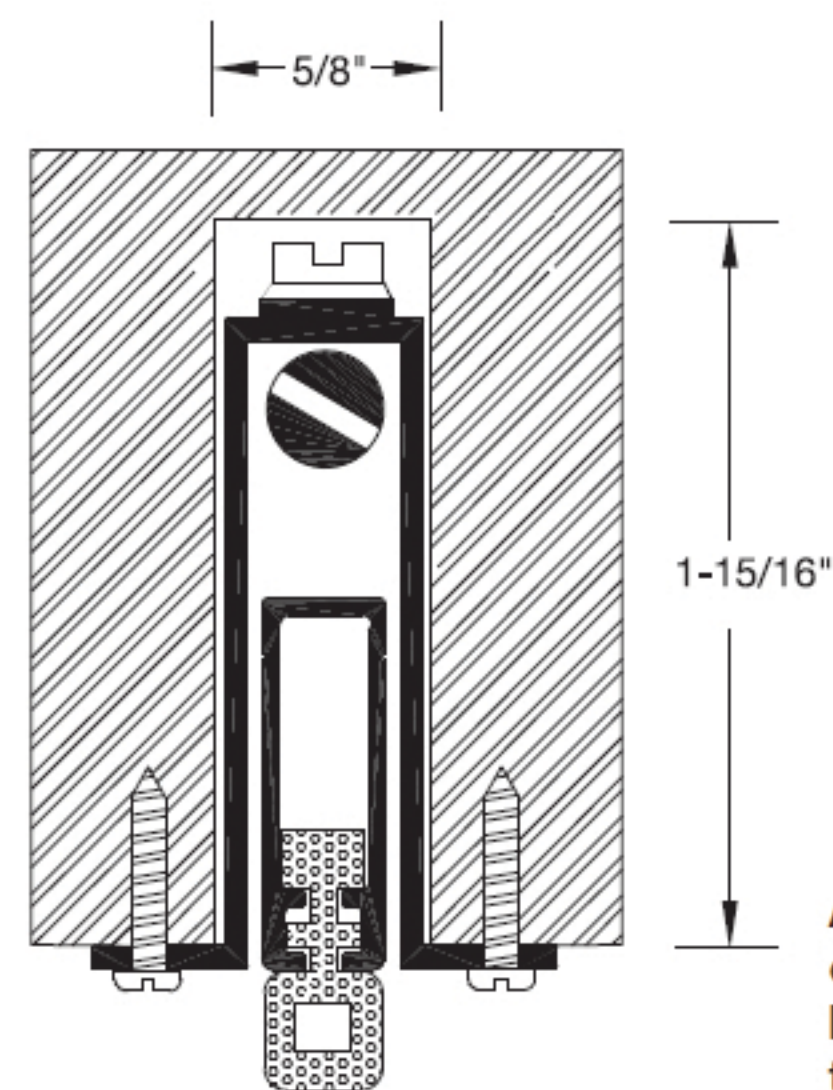


372A
FOR HOLLOW METAL DOORS

Completely concealed in bottom channel of hollow metal doors.

Minimum size 24"
Maximum size 48"
Maximum drop 1/2"
36" pre-cut to 35-1/2"

Automatic door bottom sizes: 18" to 24" cannot be trimmed. 36", 42" and 48" can be trimmed up to 3". Other sizes can be trimmed up to 1". **Part 370 can be trimmed up to 2" in all sizes.**

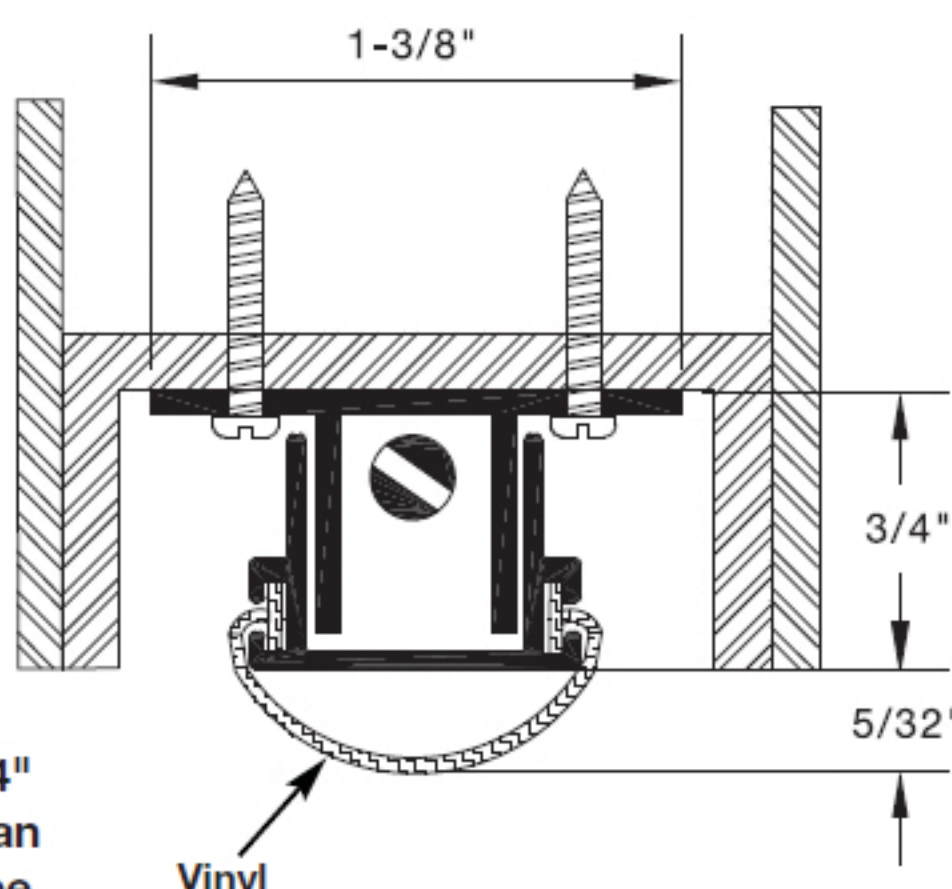

370A



With sponge neoprene in bar

370A LEAD

With lead in bar for X-ray shielding
Minimum size 24"
Maximum size 60"
Maximum drop 3/4"

PLEASE NOTE:

Door bottoms are not designed to seal directly on carpet. For best results door bottoms should seal on a solid surface. The solid surface should be positioned above the level of the floor covering on either side of the door.

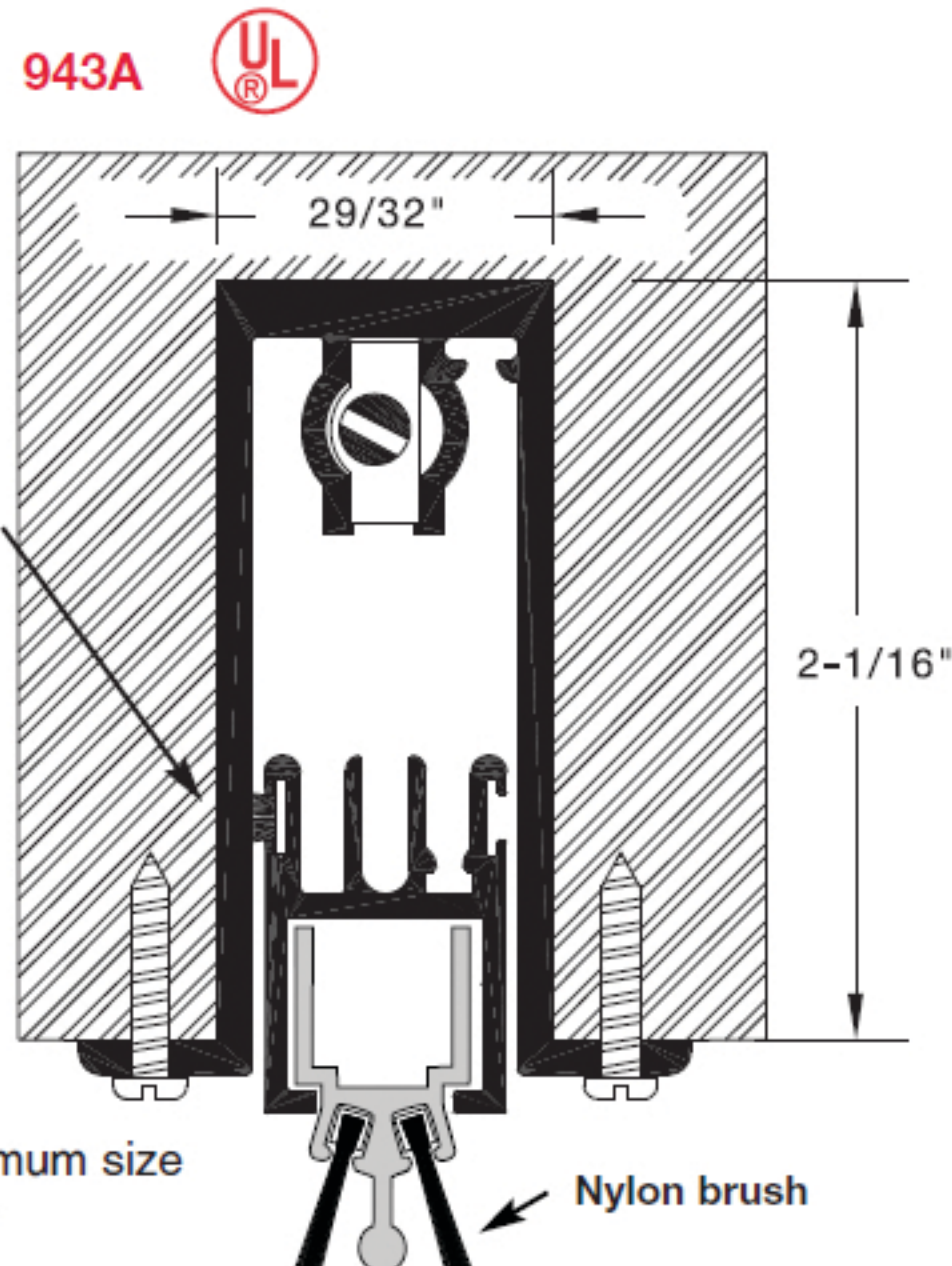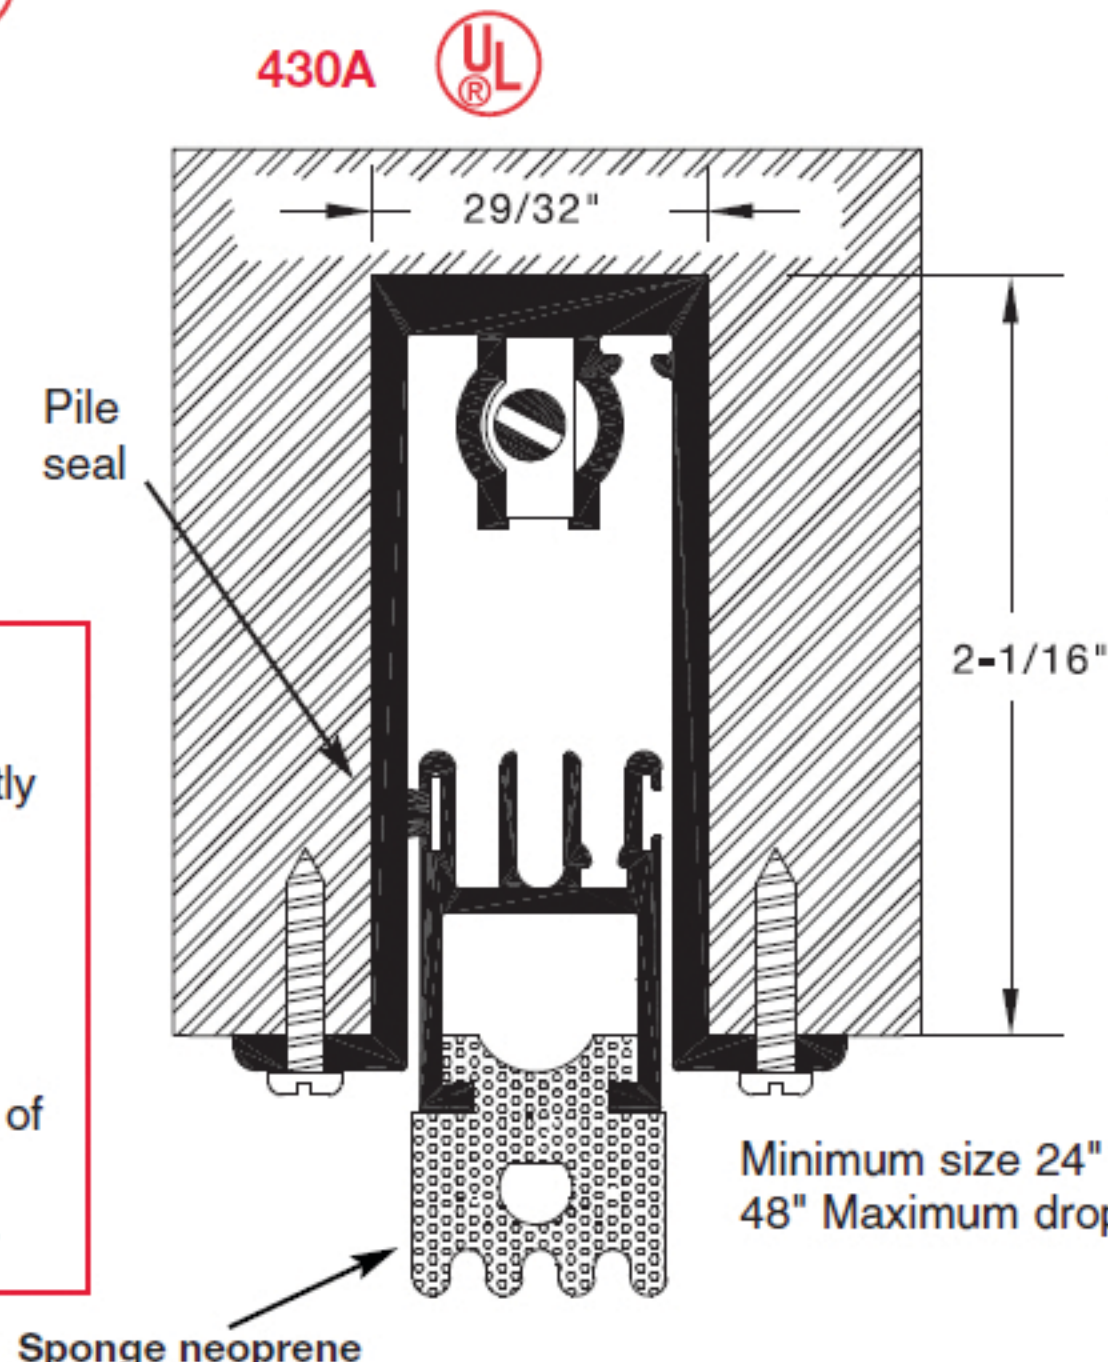

Minimum size 24" Maximum size 48" Maximum drop 3/4"