

Adjustable Door Stops


PLEASE NOTE: These products have been fire rated for use as perimeter seals only and shall not be used in lieu of an integral pressed steel stop on fire rated installations.

For heavy duty use, specify 59, 99, 399, 499 or 599 which feature a captive adjustment screw drilled and tapped into the solid bar.


One side of each piece mitered if ordered in sets.

Where adjustable door stops are applied on top of existing stops, it is recommended that locks with 3-3/4" backsets be used rather than locks with a 2-3/4" backset. This allows adequate space between the door knob and the weatherstrip.


633C
633D

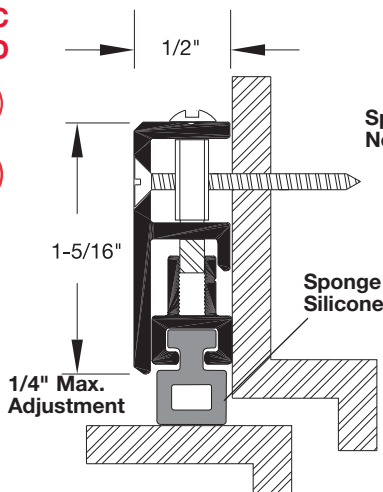


499C
499D
499G

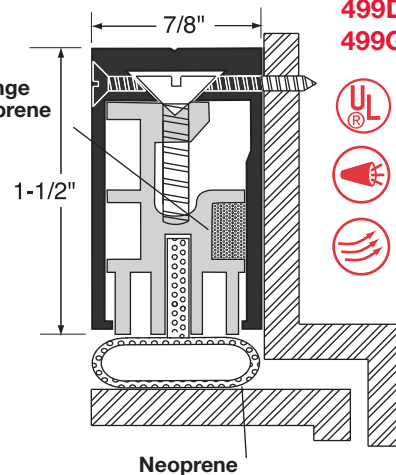


33C
33D
33G

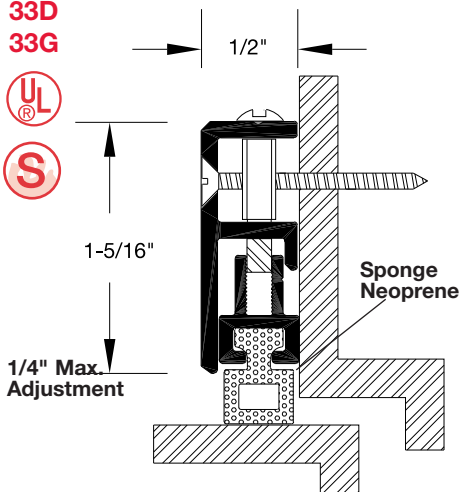


599C
599D
599G

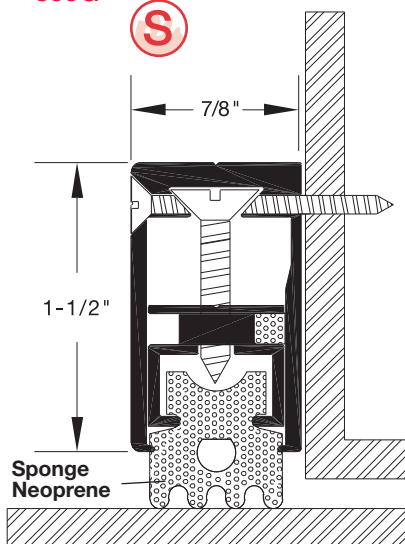


59C
59D
59G

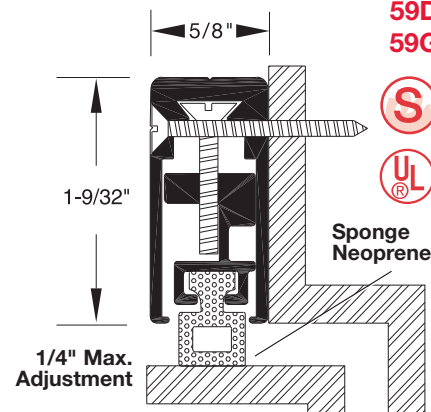

399C
399D
399G

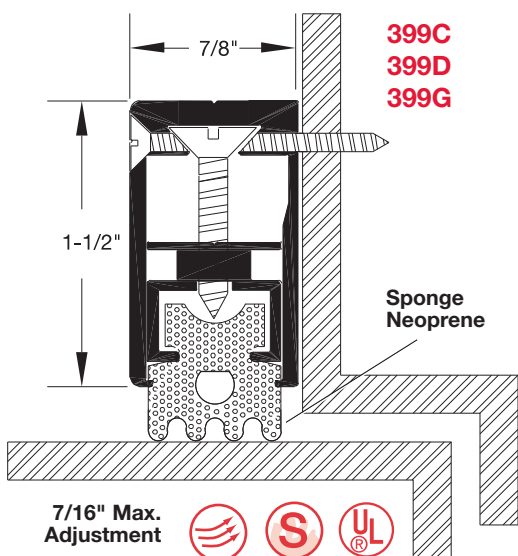

659C
659D
659G

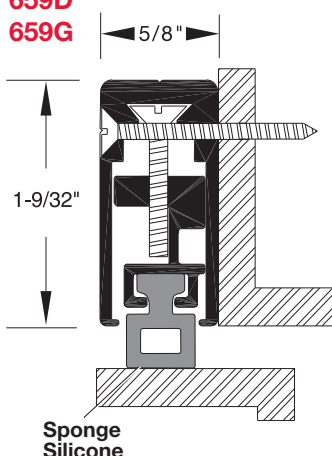

99C
99D
99G

