




Box 459 - Rosemount, MN 55068

Phone 800-328-0953

Fax 800-334-8823

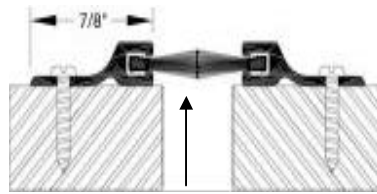

PILE

Astragal Part # 804

This weather strip is designed to fill the space between the meeting stiles of double doors. The space separating the aluminum retainers holding the pile should be 3/8".

1. Measure the height of the door and cut the two pieces of astragal to equal the height.
2. Fasten one astragal to each face of the individual doors with the screws furnished so as not to interfere with self-closing devices, locks or other door hardware.
3. Operate the door several times to ensure the gasketing material is adjusted properly so as to not inhibit the door from self-closing and latching.



Positive Pressure Tested
Gasketing Materials for Fire
Doors. Intended for Application
to/with listed steel frames
and/or classified steel covered
composite, hollow metal type
fire doors rated up to 3 hours,
wood and plastic covered
composite type fire doors rated
up to 1-1/2 hours, and wood
core type fire doors rated up
to 20 minutes.

Meets UL10B, UL10C and
UBC 7-2 (1997) Category J.

17L5