

Architectural Grade Overhead Concealed Closers Single Acting Center Hung

Model 700 Center Hung

Application

Single Acting, Handed
Exterior or Interior Doors
Low to Medium Traffic
Weight to 200 lbs.



ANSI C05052



Closer shown with cover, furnished
with W, M, MW models

***Note that mounting channels must be welded into
frames prior to shipment to job site.**


Product Description & Features

- Available in non-hold open (N) or automatic hold open (A). Specify 90 or 105°, A or N
- Product should always be used with auxiliary stop
- 1 3/4" doors
- Adjustable closing speed
- Adjustable hydraulic backcheck
- Frame stop required (*see part number 60131 on page 92*), order separately
- 1/2" longer than standard closer spindle is available and must be ordered as part of the closer. It cannot be added later
- Includes 2183020 bottom pivot
- Optional end cap 199 for top and bottom of wood door

Models

- **700** should be used on aluminum doors and frames. Package includes closer body, arm, frame mounting clips 1639000 and bottom pivot 2183020
- **M700** should be used on metal doors and frames. Package includes closer body, arm, cover plate, frame mounting channel 1929000* and bottom pivot 2183020
- **MW700** should be used on wood doors and metal frames. Package includes closer body, arm, cover plate, frame mounting channel 1929000* and bottom pivot 2183020
- **W700** should be used on wood doors and frames. Package includes closer body, arm, cover plate, frame mounting channel 19809010 and bottom pivot 2183020

Technical Information

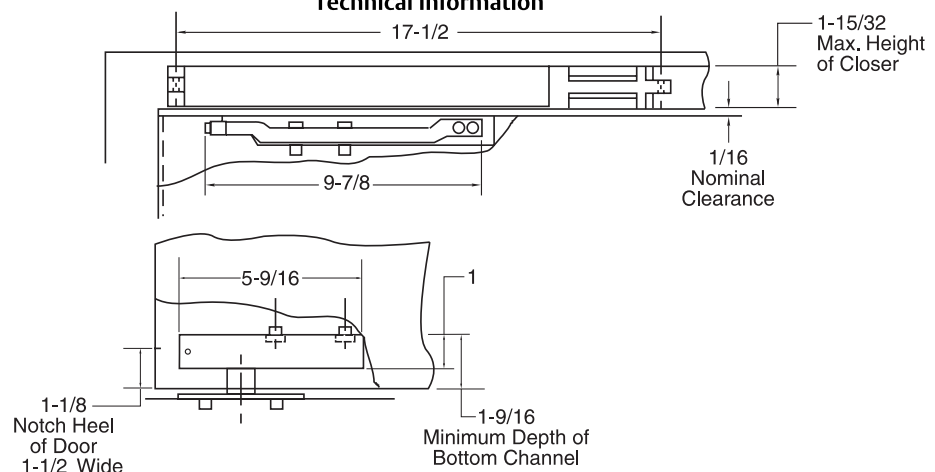

Sized Spring

706, M706, MW706, W706	707, M707, MW707, W707	708, M708, MW708, W708
Exterior 2'6" x 8'0" (762mm x 2438mm)	Exterior 3'0" x 8'0" (914mm x 2438mm)	Exterior 3'6" x 8'0" (1067mm x 2438mm)
Interior 3'0" x 8'0" (914mm x 2438mm)	Interior 3'3" x 8'0" (991mm x 2438mm)	Interior 3'8" x 8'0" (1118mm x 2438mm)

Specify size when ordering