

ASSA ABLOY, the global leader in door opening solutions



HEAVY-DUTY FLOOR CLOSERS

Complete Door Control for Exterior and Interior, High Traffic, Heavy Doors, Where Concealment is Desired

Copyright © 2001-2018, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company, All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc., is prohibited.



ASSA ABLOY, the global leader in door opening solutions



HEAVY-DUTY FLOOR CLOSERS

Complete Door Control for Exterior and Interior, High Traffic, Heavy Doors, Where Concealment is Desired

Copyright @ 2001-2018, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc., is prohibited.

HEAVY-DUTY FLOOR CLOSERS

TABLE OF CONTENTS

TABLE OF CONTENTS

General Information	3
How to Select Product	4-5
Options	6-7
Certifications	7
Limited Warranty	7
Specifications	7
Offset Floor Closers	
27 Offset Floor Closer	8
27-180 Offset Floor Closer 180° Swing.	9
127 Closer for Deep Reveal	10
427 Closer for Alcove Application	11
F327 Closer Independently Hung – Hanging Means by Others	12
L27 Closer for Lead-Lined/Heavy Weight/High Traffic Doors	13
L27-180 Closer for Lead-Lined/Heavy Weight/High Traffic Doors 180° Swing	14
QT/Q27 Closer with Quick Install Mounting 1-3/4" Door	15
HM27 Closer with Offset Hinges for Hollow Metal Installations 1-3/4 Door	16
20 Lighter Duty Floor Closer	17
Intermediate Pivots & Hinges	
119	18
M19/M190	18
ML19	19
FA19	19
Single-Acting Center Hung Floor Closers	
28 x 554 Closer with Flat, Low Profile Arm	20
28 Closer with Arm Centering Screws	
H28 Closer Heavy Weight/High Traffic 2" min. Door Thickness	
H28 x 587 Closer Heavy Weight/High Traffic 1-3/4" Door or For Alternate Pivot Point	
328 Closer for Patch Fittings (Patch Fittings by Others)	
428 Closer with Patch Fittings	
EH28 Closer Heavy Weight/High Traffic Power Transfer	
EH28 x 587 Closer Heavy Weight/High Traffic 1-3/4" Door or For Alternate Pivot Point with Power Transfer	
Double-Acting Center Hung Floor Closer	
30 Lighter Duty Double Acting Floor Closer	26
40 Double Acting Floor Closer	
H40 Heavy Weight/High Traffic 2" Min. Door Thickness	27
H40 x 587 Closer Heavy Weight/High Traffic 1-3/4" Door or For Alternate Pivot Point	27
Optional Center Hung Top Pivots	
345	28
H345	28
Quick Reference of Options	29
How to Order	29
Parts Drawings	30-42




Floor closers provide the best mechanical means to support and control a door. They are designed to work with the laws of physics to provide long-lasting performance and reliability.

The weight of the door is supported by bottom arm and floor

- Uses laws of gravity to its advantage
- Door swings with less resistance
- Heavier doors can be accommodated
- Reduced stress on frame
- Fasteners are in shear, not tension
- Eliminates door sag
- Vertically adjustable

Heavy-duty, hardened, one piece steel spindles

- Designed to provide positive dead stop
- Thrust bearing supports vertical load
- Needle bearings for lateral forces
- Extra heavy-duty models also have an additional surface applied thrust bearing to handle heavier doors or doors that have very high traffic

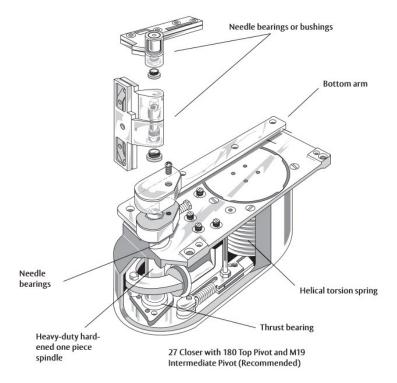

Bottom arm attached directly to closer spindle

- A mechanical advantage that increases efficiency insuring that ICC/ANSI A117.1 compliant, lower opening forces, will still close the door
- One to one ratio of door swing to spindle rotation makes control more precise
- Floor closers are more efficient than a regular arm surface closer

Helical torsion spring

- Operates in same direction as door movement and contributes to even higher closer efficiency
- A torsion spring has a much longer life than standard compression springs

Advantages of concealed floor closers

- Aesthetics let the beauty of the door and its surroundings take center stage
- Vandal resistant mechanism not exposed
- The solution for arch top doors offset floor closers
- Both mechanical advantage and aesthetics a concealed floor closer exclusive

Choose from many different models


- Use standard product with a top pivot for the best efficiency
- Use a quick install (Q) model to facilitate easy closer removal
- Use extra heavy-duty (L & H) (L-offset)
 (H-center hung) models for higher traffic/lead
 lined or extremely heavy doors
- Use model HM with 3/4" offset hinges for hollow metal doors and frames prepared for 4-1/2" hinges
- Closers can be offset hung, center hung or independently hung, single or double acting (center hung only)



HEAVY-DUTY FLOOR CLOSERS


HOW TO SELECT A PRODUCT

1. Offset Vs. Center Hung Application




3/4" Offset

Pivot point located 3/4" from the heel edge of the door and 3/4" from face of door



1-1/2" Offset

Pivot point located 3/4* from the heel edge of the door and 1-1/2* from face of door. Used on doors with cladding on face or trim on frame



Center Hung

Pivot point centered in thickness of door. Distance from heel edge can vary 2-3/4" and up (Not for use on fire rated doors)

2. Size of Door (Width, Height, Thickness)

Door Material	Door Thickness			
DOOI Material	1-3/4"	2-1/4"	3"	
Hollow Metal	6.5	7	_	
Solid Core Wood	7	9	11.5	
Aluminum/Glass Storefront	3.5	4	_	
Bullet Resistant	20	21		
MDF	7	9	11.5	
	Glass Thickness			
Tempered Glass	3/8"	1/2"	3/4"	
	5	7	9.75	
	Lead Thickness			
Lead Lining	1/16"	1/8"	1/4"	
(add to door material weight)	5	8	9.75	
		Cladding Material		
3/4" Cladding	Wood	Stone	Bronze	
(add to door material weight)	3	10.5	28	

Example: 3/0 X 7/0 X 1-3/4" WD X 1/4" Lead lining

For doors of other sizes consult factory

Example: 3/6 X 8/0 X 1/2" Tempered Glass Door

Door: 28sq ft x 7lb./sq ft = 196lbs



3. Expected Frequency of Door Opening

Application	Daily	Yearly	
Large department store entrance	5,000	1,500,000	
Large office building entrance	4,000	1,200,000	
Theater entrance	1,000	365,000	
School entrance	1,250	225,000	High
School restroom door	1,250	225,000	
Store or bank entrance	500	150,000	
Office building restroom door	400	118,000	
School corridor door	80	15,000	
Office building corridor door	75	22,000	Average
Store restroom door	60	18,000	
Residential entrance door	40	15,000	
Residential restroom door	25	9,000	
Residential hallway door	10	3,600	Low
Residential closet door	6	2,200	

How to Determine Hand of Door



Face a door swinging open away from you. If it opens to the right, it is right handed. If it opens to the left, it is left handed.



HEAVY-DUTY FLOOR CLOSERS

OPTIONS

Sealed Closer - Prefix SC

This option for exterior doors or interior doors, with heavy exposure to water or cleaning solvents, protects the body. The closer body is placed in the cement case. A stainless steel cover plate is then gasketed and fastened to the cement case. This must be ordered with closer and cannot be ordered less the cement case.

Delayed Action - Prefix DA

After full open, permits door to remain ajar (at 70 degrees) for up to 40 seconds. Operates by separate valve and can be shut off if not needed. Not available on closers with hold open feature.

Physically Handicapped – Prefix PH

To comply with ICC/ANSI A117.1 established by the Americans with Disabilities Act. PH prefix indicates 5 pounds of opening force, based at 30° from centerline of pivot. PH closers may not be used on labeled fire doors or exterior doors. Rixson accepts no responsibility for PH closers and door latching. Also, be advised that ADA guidelines DO NOT apply to fire rated openings or exterior doors.

Wood Door - Prefix W

When using a center hung product with the centering arm (e.g. 28, 30 or 40) a special plate and less obtrusive adjusting screws are needed for wood doors. This plate is reinforcement to the deep mortise required for that arm, protecting veneer.

Fire Rated – Prefix F

Closer packages for fire rated doors (up to 3 hours) include a steel top pivot and must have additional steel intermediate pivots. These closers are non-hold open.

Twenty Minute Label – Suffix -20 (1)

This UL rating is for 20 minute doors. Pivots are brass base material and include a visible label.

8-1/2 Lbs. Opening Force – Prefix PH Suffix 8-1/2

This is a lighter than normal opening force. Be aware that this may not be strong enough to close fire rated or exterior doors. Rixson accepts no responsibility for PH closers and door latching. Also, be advised that ADA guidelines DO NOT apply to fire rated openings or exterior doors.

Less All Parts - Suffix LAP

If a closer is needed for replacement, the arm, cover, cement case, top pivot and floor plate are omitted.

Less Floor Plate - Suffix LFP

When thresholds or cover pans are being used, the closer doesn't need the decorative floor plate.

Less Cement Case - Suffix LCC

For existing installations or when cement case has been sent earlier in construction. Closer will be packaged without the cement case.

Less Top Pivot - Suffix LTP

For unusual head conditions, where the top pivot cannot be used, the closer is shipped without the top pivot. For offset installations, an additional load bearing intermediate (side jamb) M190 pivot is required. All intermediate pivots for that opening should be M190's, not M19's

Degree of Swing - Follows Model Number

Single acting heavy-duty floor closers have a deadstop. This means that the door cannot go past a certain point. If ordered as a hold open closer, the hold open position is exactly the same as the deadstop. The degrees available are 85°, 90°, 95° or 105° (180° for model 27 only). It is recommended that the maximum degree of swing be ordered.

Double acting closers have a deadstop at 103° and are available with hold open options at 90° or 100°.

Non Hold Open - Suffix N

These closers do not hold the door open. This feature cannot be changed in the field.

Automatic Hold Open - Suffix A

These closers hold the door open. This feature cannot be changed in the field. Models 27-180, 30 & 40 only.

Selective Hold Open – Suffix S

These closers can be set to hold open or non-hold open. This is done via a screw control on the top of the closer. Available on Models 27 and 28 only.

Hand-Suffix RH or LH

All single acting floor closers are handed. All double acting floor closers (30, 40, H40) are non-handed.



Door Thickness - Suffix 1-3/4, 2, 2-1/4, 2-1/2 or 3

When ordering L product for lead lined doors, the thickness of the door must be given. The purpose of the L product is to have screws spaced so that they straddle the lead in the center of the door. Also used when lead lining is under the skins of the door. Recommended for use on extra heavy or high traffic doors.

Cold Weather Fluid - Suffix CWF

Cold weather fluid should be specified for exterior doors in consistently cold climates under 32° F for weeks at a time. The hydraulic fluid is of a lower viscosity to prevent sluggish closing. Cannot be used with the delayed action feature.

Extended Spindle - Suffix Extra Length

Any special floor coverings, or severe door undercuts, will affect the spindle height. In these applications an extended spindle may be required. See product template to determine if an extended spindle is needed. Extended spindles available in 1/2" increments up to 2" longer than standard.

1-1/2" Offset - Suffix 1-1/2

Offset is the distance from the face of the door to the pivot point. Extended offsets should not be used unless there is cladding on the face of the door or there is trim to clear on the frame. 1-1/2" offset arms and pivots are for doors with cladding or trim that project 3/4" from the face of the door.

Cover Pan (Terrazzo) – Suffix Part Number

Closers should always be accessible. They should never be buried beneath flooring materials. A cover pan sits on top of the closer and has the flooring material set in it. This way the sight line for the floor is consistent. Cover pans may require closers with longer spindles. See cover pan template to determine spindle length needed.

Special Layouts - Suffix SPLO#

Unique installations or specially engineered products are called special layouts. These numbers must be assigned by the technical support department and they must be called out specifically, by their number, when ordered.

CERTIFICATIONS BHMA

All Rixson® heavy-duty floor closers are in compliance with ANSI/BHMA A156.4 Standards. See individual products for sub sections.

LIMITED WARRANTY

Rixson heavy-duty floor closers models 27/28 and 30/40 are warranted for 10 years against defect. The model 20 closer carries a 2 year warranty. See Rixson Price Book for specific details of the limited warranty.

SPECIFICATION

Floor closers shall be heavy-duty model 27 (offset) or model 28 (center hung). All closers shall be handed. Choose appropriate functions and strengths to accommodate lead lining, extra high traffic, fire rating, independently hung or quick install models. These closers shall have separate and independent checking valves, to control latch speed, closing speed and adjustable hydraulic backcheck. All single acting closers shall have a built in dead stop feature. All closers shall have one piece spindle assembly. Extra heavy-duty closers shall have minimum of two thrust bearings and one needle bearing. Closers shall not have compression spring.



Model 27

3/4" OFFSET HUNG

Application

- Single Acting, Handed
- Exterior or Interior Doors
- Weight to 450 lbs.*
- Door Width up to 4'0" (1219mm)






ANSI/C06041/C06051


* Door size & weight guidelines are determined using the appropriate number of intermediate pivots


Product Description & Features

- Built-in positive dead stop prevents door from swinging beyond the desired opening degree (specify 85°, 90°, 95°, 105°)
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or selective hold open (S) at same degree as dead stop
- Delayed action option-prefix "DA" (Non-hold open closers only)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix PH and suffix 8-1/2 lbs.)
- Cold weather fluid available specify "CWF" (not available for closers with "DA")
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- Available 1-1/2" offset, for doors with 3/4" cladding or frames with applied molding, maximum door weight 250 lbs.
- Cycolac, rust-proof cement case
- Vertical door adjustment
- Standard top pivot: #180 included
- For arch top doors or applications when the 180 top pivot cannot be used, supply at least two each M190 load-bearing intermediate pivots, mounted together at the top of the straight vertical edge
- Intermediate pivot(s) required: M19 (order separately), see page 18
- Doors 60" (1524mm) to 90" (2286mm) in height should use one intermediate pivot. Each additional 30" (762mm) warrants another intermediate pivot
- For fire rated openings (up to 3 hour assemblies) prefix "F". This package will be supplied with a steel top pivot (F180) and a non-hold open closer. Intermediate pivot required: FM19 (order separately), see page 18
- UL listed closers cannot have PH option
- For 20-minute labeled doors suffix "-20" to the part number
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information









Model 27-180

Application

- Single Acting, Handed
- Exterior or Interior Doors
- Weight to 450 lbs.*
- Door Width up to 4'0" (1219mm)







* Door size & weight guidelines are determined using the appropriate number of intermediate pivots


Product Description & Features

- Maximum opening 180°, auxiliary floor or wall stop recommended
- Separate and independent valves for closing speed and latch speed
- Adjustable hydraulic backcheck
- Available non-hold open (N) or automatic hold open (A)
- Not available with delayed action (DA)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix "PH" and suffix "8-1/2 lbs.")
- Cold weather option specify "CWF"
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- Available 1-1/2" offset, for doors with 3/4" cladding or frames with applied molding, maximum door weight 250 lbs.
- Cycolac, rustproof cement case
- Vertical door adjustment
- Standard top pivot: #180 included
- For arch top doors or applications where a 180 top pivot cannot be used, supply at least two each M190 loadbearing intermediate pivots, mounted together at the top of the vertical edge
- Intermediate pivot(s) required: M19 (order separately), see page 18
- Doors 60" (1524mm) to 90" (2286mm) in height should use one intermediate pivot. Each additional 30" (762mm) warrants another intermediate pivot
- For fire rated openings (up to 3 hour assemblies) prefix "F".
 This package will be supplied with a steel top pivot (F180) and a non-hold open closer. Intermediate pivot required:
 FM19 (order separately), see page 18
- UL labeled closers cannot have PH option
- For 20-minute labeled doors suffix "-20" to the part number
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information









3/4" OFFSET HUNG

Application

- Single Acting, Handed
- Exterior or Interior Doors
- Deep Reveal Applications
- Weight to 250 lbs.*
- Door Width up to 4'0" (1219mm)





ANSI/C06041/C06051


* Door size & weight guidelines are determined using the appropriate number of intermediate pivots


Product Description & Features

Recommended for applications where vertical movement of the door at installation is not possible, such as a door inset in a deep reveal or with no ceiling clearance


- Closer has a tapered spindle and uses a unique bottom arm to allow door installation
- Built-in positive dead stop prevents door from swinging beyond the desired opening degree (specify 85°, 90°, 95° or 105°)
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or selective hold open (S) at same degree as dead stop
- Delayed action option prefix "DA" (non-hold open closers only)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix PH and suffix 8-1/2 lbs.)
- Cold weather fluid option specify "CWF" (not available for closers with "DA")
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- Cycolac, rustproof cement case
- Standard top pivot: #180 included
- For arch top doors or applications where a 180 top pivot cannot be used, supply at least two each M190 loadbearing intermediate pivots, mounted together at the top of the vertical edge. Do not use 119 intermediate pivot.
- Intermediate pivot(s) recommended for non fire rated opening: 119 (order separately), see page 18
- Doors 60" (1524mm) to 90" (2286mm) in height should use one intermediate pivot. Each additional 30" (762mm) warrants another intermediate pivot
- For fire rated openings (up to 3 hour assemblies) prefix "F".
 This package will be supplied with a steel top pivot (F180) and a non-hold open closer. Intermediate pivot required:
 FM19, (order separately), see page 18
- UL labeled closers cannot have PH option
- For 20-minute labeled doors suffix "-20" to the part number
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information





For the Top Pivot Outline See Page 9





Model 427

Application

- Single Acting, Handed
- Exterior or Interior Doors
- Deep Reveal/Alcove Applications
- Weight to 250 lbs.*
- Door Width up to 4'0" (1219mm)





ANSI/C06041


*Door size & weight guidelines are determined using the appropriate number of intermediate pivots


Product Description & Features


Recommended for applications where vertical movement of the door at installation is not possible, such as a door inset in an alcove with no ceiling or side jamb clearance

- Closer has a tapered spindle and uses a unique bottom arm
- Built-in positive dead stop prevents door from swinging beyond the desired opening degree (specify 85°, 90°, 95° or 105°) Note: Alcove doors can rarely go beyond 90°
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or selective hold open (S) at same degree as dead stop
- Delayed action option prefix "DA" (non-hold open closers only)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix "PH" and suffix "8-1/2 lbs.")
- Cold weather fluid option specify "CWF" (not available for closers with "DA")
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- Cycolac rustproof cement case
- Standard top pivot: #180 x 102 included
- Intermediate pivot(s) recommended: 119 (order separately), see page 18
- Doors 60* (1524mm) to 90* (2286mm) in height should use one intermediate pivot. Each additional 30* (762mm) warrants another intermediate pivot
- Not available for fire rated openings
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information









INDEPENDENTLY HUNG

Application

- Single Acting, Handed
- Interior or Exterior Doors
- Door Width up to 4'0" (1219mm)
- For Doors over 250 lbs. Consult Factory
- 1-3/4 doors only



ANSI/C06031

Product Description & Features


Used as a concealed floor closer for independently hung doors – butt hinges, pocket pivots, or continuous hinges

- Closer does not support weight of door

Note: Hanging means must be specified when ordering. Check the product template. If your hanging means are not listed, contact factory for a special layout and pricing

- 90° maximum door swing
- Auxiliary stop recommended
- Includes closer, mortised rail and arm with slider
- Separate and independent valves for closing speed, latch speed and backcheck
- Not available in "PH", "DA", or Hold Open
- Cold weather fluid "CWF"
- Sealed closer option specify "SC"
- Floor plate standard. For threshold applications a 1/2" extended spindle is required
- Cycolac rustproof cement case
- This closer carries a UL Listing for 3 hour fire door assemblies. Fire rated hanging means required
- Furnished with wood and machine screws
- Extended spindle available in 1/2" increments up to 2" longer than standard

Technical Information





Model L27

Application

- Single Acting, Handed
- Exterior or Interior Doors
- Lead-Lined/Heavy/High Traffic Doors
- Weight to 1500 lbs.*
- Door Width up to 4'0" (1219mm)





ANSI/C06071


* Door size & weight guidelines are determined using the appropriate number of intermediate pivots


Product Description & Features


Heavy-duty bottom arm and top pivot with screw holes spaced to straddle lead lining, or for extra heavy or very high traffic doors.

- Available for the following lead-lined door thicknesses:
 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (63mm) or 3" (76mm)
- Additional thrust bearing for greater load capacity
- Built-in positive dead stop prevents door from swinging beyond the desired opening degree (specify 85°, 90°, 95° or 105°)
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or selective hold open (S) at same degree as dead stop
- Delayed action option prefix "DA" (non-hold open closers only)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix PH and suffix 8-1/2 lbs.)
- Cold weather fluid option specify "CWF" (not available for closers with "DA")
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- For extended offsets, consult factory
- Cast iron cement case
- Vertical door adjustment
- Standard top pivot: L180 included
- For arch top doors or applications where an L180 top pivot cannot be used, supply at least two each ML19-load bearing intermediate pivots, mounted together at the top of the vertical edge
- Intermediate pivot(s) required: ML19 (order separately), see page 19
- Doors 60" (1524mm) to 90" (2286mm) in height should use one intermediate pivot. Each additional 30" (762mm) warrants another intermediate pivot
- For fire rated openings (up to 3 hour assemblies) prefix "F". This package will be supplied with steel top pivot (FL180) and non-hold open closer. Furnish intermediate pivot FML19, order separately, see page 19. Note: UL listing for 1-3/4" thick doors only.
- UL labeled closers cannot have PH option
- For 20-minute labeled doors suffix "-20" to the part number
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information







* 1-3/4" door thickness shown



3/4" OFFSET HUNG

Application

- Single Acting, Handed
- Exterior or Interior Doors
- Lead-Lined/Heavy/High Traffic Doors
- Weight to 1500 lbs.*
- Door Width up to 4'0" (1219mm)






ANSI/C06071


Product Description & Features


Heavy-duty bottom arm and top pivot with screw holes spaced to straddle lead lining, or for extra heavy or very high traffic doors.

- Available for the following lead-lined door thicknesses:
 1-3/4* (44mm), 2* (51mm), 2-1/4* (57mm), 2-1/2* (63mm) or 3* (76mm)
- Additional thrust bearing for greater load capacity
- Built-in positive dead stop prevents door from swinging beyond 180° only
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or automatic hold open (A) at 180°
- Delayed action option prefix "DA" (non-hold open closers only)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix PH and suffix 8-1/2 lbs.)
- Cold weather fluid option specify "CWF" (not available for closers with "DA")
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- For extended offsets, consult factory
- Cast iron cement case
- Vertical door adjustment
- Standard top pivot: L180 included
- For arch top doors or applications where a L180 top pivot cannot be used, supply at least two each ML19 load bearing intermediate pivots, mounted together at the top of the vertical edge
- Intermediate pivot(s) required: ML19 (order separately), see page 19
- Doors 60* (1524mm) to 90* (2286mm) in height should use one intermediate pivot. Each additional 30* (762mm) warrants another intermediate pivot
- For fire rated openings (up to 3 hour assemblies) prefix "F". This package will be supplied with steel top pivot (FL180) and non-hold open closer. Furnish intermediate pivot FML19, order separately, see page 19. Note: UL listing for 1-3/4" thick doors only.
- UL labeled closers cannot have PH option
- For 20-minute labeled doors suffix "-20" to the part number
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information









Model Q27/QT27

Application

- Single Acting, Handed
- Exterior and Interior Doors
- Weight to 350 lbs.*
- Door Width up to 4'0" (1219mm)
- 1-3/4" Thick Only








ANSI/C06041/C06051


Product Description & Features

Surface-attached bottom arm allows closer removal without demounting door

- Q closers have a floor plate (shown).
- For threshold application prefix "QT"
- 3/4" offset only
- Built-in positive dead stop prevents door from swinging beyond the desired opening degree (specify 85°, 90°, 95°)
- Mortise arm with thru-bolt attachment
- Increased depth of cement case for easy closer removal
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or selective hold open (S) at same degree as dead stop
- Delayed action option prefix "DA" (non-hold open closers only)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix "PH" and suffix "8-1/2 lbs.")
- Cold weather fluid option specify "CWF" (not available for closers with "DA")
- Cycolac rustproof cement case
- Vertical door adjustment
- Standard top pivot: #180 included
- For arch top doors, consult factory
- One M19 intermediate pivot included. Note: Closer cannot be ordered without the intermediate pivot
- Doors 60" (1524mm) to 90" (2286mm) in height should use one intermediate pivot (included). Each additional 30" (762mm) or doors over 195 lbs. warrants another intermediate pivot
- For fire rated openings (up to 3 hour assemblies) prefix F.
 This package will be supplied with steel top pivot (F180), one intermediate pivot (FM19), and a non-hold open closer
- UL labeled closers cannot have PH option
- For 20-minute labeled doors suffix "-20" to the part number
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard
- Maximum door swing 95°

Technical Information

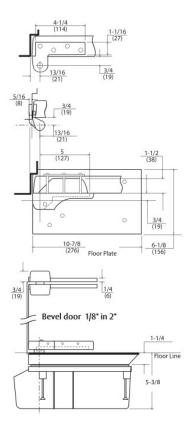





Model HM27

3/4" OFFSET HUNG

Application

- Single Acting, Handed
- Exterior or Interior Doors
- 1-3/4" Hollow Metal Doors/Frames
- Weight to 250 lbs.
- Door Width up to 4'0" (1219mm)










ANSI/C06041/C06051


Product Description & Features


Designed for stock hollow metal doors and frames with standard weight 4-1/2" hinge preparation

- Includes three special steel 4-1/2* ball bearing standard weight hinges with 3/4* offset. Doors over 90* in height warrant an additional hinge
- Surface mounted bottom arm with thru-bolts
- Built-in positive dead stop prevents door from swinging beyond the desired opening degree (85°, 90°, 95°)
- Maximum door swing 95°
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or selective hold open (S) at same degree as dead stop
- Delayed action option prefix "DA" (non-hold open closers only)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix "PH" and suffix "8-1/2 lbs.")
- Cold weather fluid option specify "CWF" (not available for closers with "DA")
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- Cycolac rustproof cement case
- For fire rated opening (up to 3 hour assemblies) prefix "F".
 This package will be supplied with 3 steel hinges and a non-hold open closer
- UL labeled closers cannot have PH option
- Furnished with 1/2 wood and full machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information









Model 20

Application

- Single Acting, Handed
- Interior Doors
- Weight to 200 lbs.*
- Door Width up to 3'0"






ANSI/C06042/C06052


* Door size & weight guidelines are determined using the appropriate number of intermediate pivots


Product Description & Features

- Allows 180° door swing (trim permitting)
- Single valve adjustable closing speed 70° to 0°
- Built-in hydraulic backcheck cushions opening from 140° to 180°
- Available non-hold open only
- Delayed action not available
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix "PH" and suffix "8-1/2 lbs.")
- Available with floor plate or threshold installation (floor plate shown)
- Cast iron cement case
- Vertical door adjustment
- Standard top pivot: #180 included
- Intermediate pivot(s) recommended: M19 (order separately), see page 18
- Doors 60" (1524mm) to 90" (2286mm) in height should use one intermediate pivot. Each additional 30" (762mm) warrants another intermediate pivot
- For fire rated openings (up to 3 hour assemblies prefix F.
 This package will be supplied with a steel top pivot (F180) and non hold open closer. Intermediate pivot required;
 FM19 (order separately). See page 18
- UL labeled closers cannot have PH option
- For 20-minute labeled doors suffix -20 to the part number
- Furnished with wood and machine screws
- Extended spindles available in 1/2* increments up to 2* longer than standard

Technical Information









INTERMEDIATE PIVOTS

Application

- Full Mortise
- Handed




ANSI/C07382

Product Description & Features

- Not load-bearing
- Maintains door alignment
- Available 3/4" offset only
- Non-ferrous base material
- Recommended for use with Model 127 and 427 Floor Closers
- Bevel door 1/8" in 2"
- Furnished with wood and machine screws

Technical Information




Model M19/M190

ANSI/C07321/C07371

Product Description & Features

- M19, bushing, not load-bearing
- M190, bearing, load-bearing
- Maintains door alignment
- Aids in installing floor closers and bottom pivots
- Non-ferrous base material 3/4" offset standard
- Available 1-1/2 (38mm) offset for 3/4" cladding
- Available for fire door assemblies (ferrous material) specify FM19 or FM190
- On labeled for fire doors NFPA80 requires an intermediate pivot for every additional 30" (762mm) of door height over 60" (1542mm)
- For 20-minute label suffix "-20" to the part number
- Bevel door 1/8" in 2"
- For arch top doors or applications where a 180 top pivot cannot be used, supply at least two each M190 load bearing intermediate pivots, mounted together at the top of the vertical edge with a bottom pivot or floor closer
- Furnished with wood and machine screws

Technical Information





Model ML19

Application

- Heavy-Duty Full Mortise
- Handed




ANSI/C07311

Product Description & Features

Screw holes spaced to straddle lead lining in center of door. Use on extra heavy or high traffic doors.

- Maintains door alignment
- Aids in installing floor closers and bottom pivot
- Available to accommodate door thicknesses 1-3/4" (44mm),
 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), or 3" (76mm) –
 specify thickness when ordering
- Load-bearing
- Non-ferrous base material
- 3/4" offset, for extended offsets consult factory
- Available for fire door assemblies 1-3/4" (44mm) door only
 specify FML19
- On labeled fire door assemblies, NFPA80 requires an intermediate pivot for every additional 30* (762mm of door height over 60* (1524mm)
- For 20-minute label suffix "-20" to part number
- Bevel door 1/8" in 2"
- For arch top doors or applications where a 180 top pivot cannot be used, supply at least two each ML19 load bearing intermediate pivots, mounted together at the top of the vertical edge with a bottom pivot or floor closer
- Furnished with wood and machine screws

Technical Information



Model FA19

Application

- Full Mortise
- Handed




ANSI/C07361

Product Description & Features

Optional intermediate pivot for institutional use or installations where flat surfaces are objectionable

- Maintains door alignment
- Aids in installing bottom pivots
- Not load bearing
- 3/4" (19mm) offset
- May be used with fire door assemblies
- Ferrous base material
- Doors up to 90* (2286mm) in height should use one intermediate pivot. Each additional 30* (762mm) warrants another intermediate pivot
- Bevel door 1/8" in 2"
- Furnished with wood and machine Torx® screws

Technical Information





SINGLE-ACTING CENTER HUNG

Application

- Single Acting, Handed
- Exterior or Interior Doors
- Weight to 350 lbs.
- Concealed Arm
- Sizes up to 4'0" x 8'6"* (1219 x 2591mm)





ANSI/C06021

* For doors taller than 8'6" use top pivot # 345 in lieu of 340


Product Description & Features

Concealed arm is designed to eliminate visible adjusting screws on face of door


- Arm bolt locks arm to closer spindle adjustments made through heel of door
- Built-in positive dead stop prevents door from swinging beyond the desired opening degree (specify 85°, 90°, 95° or 105°)
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or selective hold open (S) at same degree as dead stop
- Delayed action option prefix "DA" (non-hold open closers only)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix "PH" and suffix 8-1/2 lbs.)
- Cold weather fluid option specify "CWF" (not available for closers with "DA")
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- Cycolac, rustproof cement case
- Standard top pivot: #340 included
- Not allowed for fire rated doors
- Frame stop required on the header at the lock side. If not supplied by frame manufacturer, recommend use of 60131 (see Door Control Accessories page 8).
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information

(Frame stop required at lock edge)



9/32



Pivot edge of door must be radiused.



Model 28

Application

- Single Acting, Handed
- Exterior or Interior Doors
- Weight to 350 lbs.
- Centering Arm
- Sizes up to 4'0" x 8'6"* (1219 x 2591mm)





ANSI/C06021

* For doors taller than 8'6" use top pivot # 345 in lieu of 340


Product Description & Features


Centering arm with adjusting screws in face of door

- Built-in positive dead stop prevents door from swinging beyond the desired opening degree (specify 85°, 90°, 95° or 105°)
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or selective hold open (S) at same degree as dead stop
- Delayed action option prefix "DA" (non-hold open closers only)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix "PH" and suffix 8-1/2 lbs.)
- Cold weather fluid option specify "CWF" (not available for closers with "DA")
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- Arm reinforcement bracket for wood doors prefix W
- Cycolac, rustproof cement case
- Standard top pivot: #340 included
- Not allowed for fire rated doors
- Frame stop required on the header at the lock side. If not supplied by frame manufacturer, recommend use of 60131 (see Door Control Accessories page 8).
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information

(Frame stop required at lock edge)





Pivot edge of door must be radiused.



Model H28

SINGLE-ACTING CENTER HUNG

Application

- Single Acting, Handed
- Exterior or Interior Doors
- Extra Heavy High Traffic Doors
- Weight to 1000 lbs.
- Sizes up to 4'0" x 8'6"* (1219 x 2591mm)





ANSI/C06061

* For doors taller than 8'6" use top pivot #H345 in lieu of H340


Product Description & Features


For high traffic or extra heavy doors (2" min. thickness)

- Additional thrust bearing for greater load capacity
- Built-in positive dead stop prevents door from swinging beyond the desired opening degree (specify 85, 90, 95 or 105°)
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or selective hold open (S) at same degree as dead stop
- Delayed action option prefix "DA" (non-hold open closers only)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix "PH" and suffix "8-1/2 lbs.")
- Cold weather fluid option specify "CWF" (not available for closers with "DA")
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- Cast iron cement case
- Standard top pivot: H340 included
- Not allowed for fire rated doors
- Frame stop required at header on lock side. If not supplied by frame manufacturer, recommend use of 60131 (see Door Control Accessories page 8).
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information

(Frame stop required at lock edge)





Pivot edge of door must be radiused.

Model H28 x 587 Arm

Application

- Side Load Arm




Product Description & Features

Identical to Model H28 except:

- Special side load arm for 1-3/4" thick doors
- Allows pivot point to be moved away from pivot edge of door
- minimum 2-3/4" backset

Technical Information





Model 328

Application

- Single Acting, Handed
- Exterior or Interior Doors
- Glass Doors with Patch Fittings
- Weight up to 325 lbs.
- Size Up to 3'2" x 8'0"




Product Description & Features

- No arm or top pivot provided
- Patch fittings by others. Rixson will provide spindle configuration to fit – provide details when ordering
- Built-in positive dead stop prevents door from swinging beyond the desired opening degree (specify 85°, 90°, 95° or 105°)
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or selective hold open (S) at same degree as dead stop
- Delayed action option prefix "DA" (non-hold open closers only)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix "PH" and suffix "8-1/2 lbs.")
- Cold weather fluid option specify "CWF" (not available for closers with "DA")
- Sealed closer option specify "SC"
- Floor plate standard. For threshold application an extended spindle is required
- Cycolac, rustproof cement case
- Not allowed for fire rated doors
- Frame stop required at header on lock side. If not supplied by frame manufacturer, recommend use of 60131 (see Door Control Accessories page 8).
- For extended spindles, contact the factory

Technical Information

(Frame stop required at lock edge)





Model 428 (With Patch Fittings

Application

- Single Acting, Handed
- Exterior or Interior Doors
- Full Glass Doors
- Weight up to 325 lbs.
- Size Up to 3'2" x 8'0"






Product Description & Features

- Top and bottom patch fittings for tempered glass doors 3/8" 1/2" thick
- Built-in positive dead stop prevents door from swinging beyond the desired opening degree (specify 85°, 90°, 95° or 105°)
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or selective hold open (S) at same degree as dead stop
- Delayed action available prefix "DA" (non-hold open closer only)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH".
 (For 8-1/2 lbs. of opening force prefix "PH" and suffix "8-1/2 lbs.")
- Cold weather fluid option specify "CWF" (not available for closers with "DA")
- Sealed closer option specify "SC"
- Floor plate standard. For threshold application an extended spindle is required (floor plate shown)
- For extended spindles, contact the factory. No vertical adjustment
- Cycolac, rustproof cement case
- Frame stop required at header on lock side
- 605, 629 and 630 finishes only

Technical Information

(Frame stop required at lock edge)





Model EH28

Application

- Single Acting, Handed
- Interior or Exterior Doors
- Floor Closer for Power Transfer
- Weight to 500 lbs.
- Sizes up to 4'0" x 8'6"* (1219 x 2591mm)




* For doors taller than 8'6" use top pivot H345 in lieu of H340


Product Description & Features

- Provides power transfer through closer spindle. Low voltage, Class II wiring (2 wire, 18 gauge only)
- 2" min. door thickness
- Additional thrust bearing for greater load capacity
- Built-in positive dead stop prevents door from swinging beyond the desired opening degree (specify 85°, 90°, 95° or 105°)
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or selective hold open (S) at same degree as dead stop
- Delayed action option prefix "DA"
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix "PH" and suffix "8-1/2 lbs.")
- Cold weather fluid option specify "CWF" (not available for closers with "DA")
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- Cast iron cement case
- Standard top pivot: H340 included
- Not allowed for fire rated doors
- Frame stop required on header on lock side. If not supplied by frame manufactuer, recommend use of 60131 (see Door Control Accessories page 8)
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information

(Frame stop required at lock edge)





Not available with ElectroLynx®

Pivot edge of door must be radiused.

Model EH28 X 587 ARM

Application

- Side Load Arm
- Single Acting, Handed
- Interior or Exterior Doors
- Floor Closer for Power Transfer
 Weight to 500 lbs.
- Sizes up to 4'0" x 8'6" (1219 x 2591mm)*


ASSA ABLOY

Product Description & Features

Identical to Model EH28 except:

- Special side load arm for 1-3/4" thick doors
- Allows pivot point to be moved away from pivot edge of door – minimum 2-3/4" backset

Technical Information



Application

- Double Acting, Non-handed
- Interior or Exterior A Doors
- Weight to 200 lbs.
- Sizes up to 4'0" x 8'6"*




ANSI/C06012

- *For doors taller than 8'6" use top pivot # 345 in lieu of 340
- ^Primary means of egress should not use double-acting closers

Product Description & Features

- Centering arm with adjustment screws in faces of door (critical for double acting doors)
- Adjustable closing speed valves for each direction of door swing
- Mechanism returns door to center
- Available non-hold open (N) or automatic hold open (A) at 90° (requires 93° swing) or 100° (requires 103° swing)
- Not available in Delayed Action (DA)
- Maximum door opening 103°
- Auxiliary door stop required, overhead or floor type
- Cold weather fluid option specify "CWF"
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- Steel cement case
- Arm reinforcement bracket for wood doors prefix "W"
- Standard top pivot: #340 included
- Not allowed for fire rated doors
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information



Pivot edge of door must be radiused.

Model 40

Application

- Double Acting, Non-handed
- Interior or Exterior A Doors
- Weight to 300 lbs.
- Sizes up to 4'0" x 8'6"* (1219 x 2591mm)

The state of the s




ANSI/C06012

- * For doors taller than 8'6" use top pivot # 345 in lieu of 340
- Primary means of egress should not use double-acting closers

Product Description & Features

- Centering arm with adjustment screws in faces of door (critical for double acting doors)
- Adjustable closing speed valves for each direction of door swing
- Mechanism returns door to center
- Available non-hold open (N) or automatic hold open (A) at 90° (requires 93° swing) or 100° (requires 103° swing)
- Not available in Delayed Action (DA)
- Maximum door opening 103°
- Auxiliary door stop required, overhead or floor type
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix PH and suffix 8-1/2 lbs.)
- Cold weather fluid option specify "CWF"
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- Steel cement case
- Arm reinforcement bracket for wood doors prefix "W"
- Standard top pivot: #340 included
- Not allowed for fire rated doors
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information



Pivot edge of door must be radiused.



Model H40

Application

- Double Acting, Non-handed
- Interior or Exterior A Doors
- Weight to 1000 lbs.
- Sizes up to 4'0" x 8'6"* (1219 x 2591mm)




ANSI/C06012

- * For doors taller than 8'6" use to pivot H345 in lieu of H340
- ^ Primary means of egress should not use double-acting closers

Product Description & Features

- For thick, extra heavy doors (2" min. thickness)
- Thrust bearing for greater load capacity
- Adjustable closing speed valves for each direction of door swing
- Mechanism returns door to center
- Available non-hold open (N) or automatic hold open (A) at 90° (requires 93° swing) or 100° (requires 103° swing)
- Maximum door opening 103°
- Auxiliary door stop required, overhead or floor type
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (For 8-1/2 lbs. of opening force prefix PH and suffix 8-1/2 lbs.)
- Cold weather fluid option specify "CWF"
- Sealed closer option specify "SC"
- Available with floor plate or threshold installation (floor plate shown)
- Steel cement case
- This arm does not allow door centering adjustment. Not recommended for pairs of doors
- Standard top pivot: #H340 included
- Not allowed for fire rated doors
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information



Pivot edge of door must be radiused.

Model H40 X 587 ARM

Application

- Side Load Arm




ANSI/C06012

Product Description & Features

Identical to Model H40 except:

- Special side load arm for 1-3/4" thick doors
- Allows pivot point to be moved away from pivot edge of door. Minimum 2-3/4" backset

Technical Information



RIXSON° ASSA ABLOY

345 Top Pivot

DOUBLE-ACTING CENTER HUNG

Application

- Fully Concealed
- Center Hung
- Non-handed
- Earthquake Tolerant
- Taller Doors




ANSI/C07021

Product Description & Features

Ideal for locations where dramatic building settling is possible. Also, for doors over 8'6" in height

- Long pivot pin engages in top of door 1-3/4" (44mm).
- Can be used with any center hung floor closer. Order the floor closer LTP (less top pivot) and the 345 top pivot separately
- Walking beam-type pivot 1/2* (13mm) diameter pivot pin
- Oil impregnated sintered bronze bearing
- Completely concealed when door is closed
- Furnished with wood and machine screws

Technical Information



H345 Top Pivot

Application

- Fully Concealed
- Center Hung
- Non-handed
- Earthquake Tolerant
- Taller Doors




ANSI/C07011

Product Description & Features

Ideal for locations where dramatic building settling is possible or for doors over 8'6" in height

- Long pivot pin engages in top of door 1-3/4" (44mm)
- Can be used with heavy-duty (H) center hung floor closer.
 Order the floor closer LTP (less top pivot) and the H345 top pivot separately
- Walking beam-type pivot 11/16" (18mm) diameter pivot pin
- Heavy-duty needle bearing
- Completely concealed when door is closed
- Furnished with wood and machine screws

Technical Information





QUICK REFERENCE OF OPTIONS, HOW TO ORDER

Prefix	Model	Degree of Swing	Hold Open Options	General Options	Handed	Positive Dead Stop	Maximum Weight*
		<u>, , , , , , , , , , , , , , , , , , , </u>		Offset Closers		· ····································	
SC, DA, PH, F	27	85,90,95,105	N, S	Ext. Spdl, CWF, 1-1/2 OS, -20, 8.5#	Yes	Yes	450
SC, PH-F	27-180	180	N, A	Ext. Spdl, CWF, 1-1/2 OS, -20, 8.5#	Yes	Yes	450
SC, DA, PH, F	127	85,90,95,105	N, S	Ext. Spdl, CWF, -20, 8.5#	Yes	Yes	250
SC, DA, PH	427	85,90,95,105	N, S	Ext. Spdl, CWF, 8.5#	Yes	Yes	250
SC	F327	90	N	Extended Spindle	Yes	No	250
SC, DA, PH, F	L27	85,90,95,105	N, S	Ext. Spdl, CWF, -20, 8.5#	Yes	Yes	1500
SC, PH, F	L27-180	180	N, A	Ext. Spdl, CWF, -20, 8.5#	Yes	Yes	1500
SC, DA, PH, F	Q27/QT	85,90,95,105	N, S	Ext. Spdl, CWF, -20, 8.5#	Yes	Yes	350
SC, DA, PH, F	HM27	85,90,95,105	N, S	Ext. Spdl, CWF, -20, 8.5#	Yes	Yes	250
PH, F	20	180	N	Ext. Spdl, -20, 8.5#	Yes	No	200
				Center Hung Closers			
SC, DA, PH	28 x 554	85,90,95,105	N, S	Ext. Spdl, CWF, 8.5#	Yes	Yes	350
SC, DA, PH, W	28	85,90,95,105	N, S	Ext. Spdl, CWF, 8.5# Yes		Yes	350
SC, DA, PH	H28	85,90,95,105	N, S	Ext. Spdl, CWF, 8.5# Y		Yes	1000
SC, DA, PH	H28 x 587	85,90,95,105	N, S	Ext. Spdl, CWF, 8.5#		Yes	1000
SC, DA, PH	328	85,90,95,105	N, S	Ext. Spdl, CWF, 8.5#	Yes	Yes	325
SC, DA, PH	428	85,90,95,105	N, S	Ext. Spdl, CWF, 8.5#	Yes	Yes	325
SC, PH, W	30	90,100	N, A	Ext. Spdl, CWF, 8.5#		No	200
SC, PH, W	40	90,100	N, A	Ext. Spdl, CWF, 8.5# No		No	300
SC, PH	H40	90,100	N, A	Ext. Spdl, CWF, 8.5#	No	No	1000
SC, PH	H40 x 587	90,100	N, A	Ext. Spdl, CWF, 8.5#	No	No	1000

 $^{^{*}}$ Offset closer weights are for 3/4' and the use of an intermediate pivot

HOW TO ORDER

PH Prefix	27 Model	90 Degree of Swing	N Hold Open	x 1/2" Ext Spdl Suffix	x RH Hand	x 626 Finish
SC Sealed Closer DA Delayed Action PH Lighter Spring (ADA) W Wd Dr (center hung) F Fire Rated Doors (offset) — Not available with PH			Non- Hold Open Automatic Hold Open Selective Hold Open (model 27 & 28)	: LH	Right Hand Left Hand Double Acting	B
DIVEON	27 28 127 H28 427 328 F327^ 428 L27 Q27 *30 QT27 *40 HM27 *H40 20 AHanging means must accompany quote, prior to or *Degree must be for hold open uni	request for dering. furnished	554 587 Ext Spd 1-1/2" CWF -20 8.5# LAP LFP LCC LTP —	Concealed Arm Side Load Arm Longer Spindle (extra length required) Offset Cold Weather Fluid 20 Minute Label Optional PH Spring Closer Body Only Less Floor Plate Less Cement Case Less Top Pivot Cover Pan (need depth) Door Thickness (for L Product) Special Layout #	618 619 622 625 626	Bright Brass Satin Brass Bright Bronze Satin Bronze Oil Rubbed Bronze Dark Oxidized Satin Bronze - equivalent Bright Nickel Satin Nickel Flat Black Bright Chrome Satin Chrome

PARTS DRAWINGS

RIGHT HAND SHOWN 3/4" OFFSET

- (A) Pivot Stud 181770-ASY
- (B) Hex Cap 181778-*
- (C) Arm Cap & Screw 012142R*AS (RH, BRS) 012142L*AS (LH, BRS) 012144R*AS (RH, SS) 012144L*AS (LH, SS)
- (D) 3/4" Offset Arm x Locking Screw 275177 (RH) 275176 (LH)
- (E) Arm Locking Screw Only 88905-PKG (5)
- (F) Arm Shims 275065-PKG (5)
- (G) Arm Bearing Washer 275062-PKG (5)
- (H) Spindle Shoulder Collar 259000-*

FOR 27 x 1-1/2" OFFSET


1-1/2" Offset Top Pivot 180 x 1-1/2"

> F180 x 1-1/2" (Fire Rated)

180 x 20 x 1-1/2 (20 Minute)

- 1-1/2" Offset Arm x Locking Screw 275167-*
- 1-1/2" Bottom Arm Package 252060R* 252060L*

*specify finish

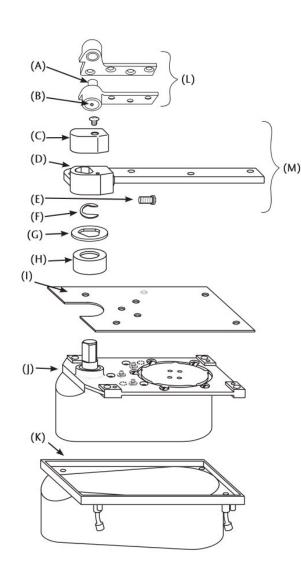

- (L) 3/4" Offset Top Pivot Assembly 180 (standard) F180 (Fire Rated) 180-20 (20 minutes)
- (M) Bottom Arm Package 252050R* (RH) 252050L* (LH) (Includes C,D, H, and attaching screws)
- l) Floor Plate x Screws 274050R* (RH) NHO 274050L* (LH) NHO 274750R* (RH) SHO 274750L* (LH) SHO
- (J) Closer Body LAP Specify Complete Model
- (K) Cement Case x Screws 253000-PKG

SCREW KITS

180 Top Pivot Screw Kit 107014-* Machine (2) Req 107114-* Wood (2) Req

Arm Screw Kit 107044 Machine 107144 Wood

Floor Plate Screw Kit 107004 -*




Model 127/427


RIGHT HAND SHOWN 3/4" OFFSET

- (A) Pivot Stud 181770-ASY
- (B) Hex Cap 181778-*
- (C) Arm Cap x Screw 12029-*AS
- (D) 3/4" Offset Arm 12027 (RH) 12028 (LH)


Model 427

(D) 3/4* Offset Arm 12027 (RH) 12028 (LH) Top Pivot 180 x 102





*specify finish



- (I) 3/4" Offset Top Pivot 180 F180 (Fire Rated) 180 x 20 (20 Minute)
- (J) Bottom Arm Package 652050R* (RH) 652050I* (LH) (Includes C, D and attaching screws)
- (E) Spindle Shoulder Collar 259000-*
- (F) Floor Plate with Screws 274050R* (RH) NHO 274050L* (LH) NHO 274750R* (RH) SHO 274750L* (LH) SHO
- (G) Closer Body (Specify Complete Model No. x LAP)
- (H) Cement Case with Screws 253000 PKG

SCREW KITS

180 x 102 Screw Kit

107014-* 1 each Machine 107114-* 1 each Wood 107112-* 1 each Wood

107012-* 1 each Machine

180 Top Pivot Screw Kit 107014-* Machine (2) Req 107114-* Wood (2) Req

Arm Screw Kit 107044 Machine 107144 Wood

Floor Plate Screw Kit 107004-*




PARTS DRAWINGS

RIGHT HAND SHOWN INDEPENDENTLY HUNG

(A) Door Rail 327006

*specify finish

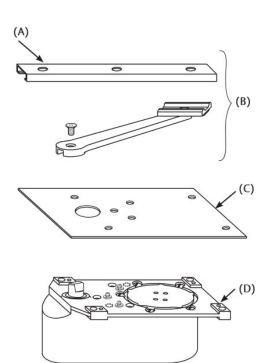

- (B) Bottom Arm Package 3252010-*
- (C) Floor Plate with Screws 3274010R*(RH) 3274010L*(LH)
- (D) Closer Body (Specify Complete Model No. x LAP)
- (E) Cement Case with Screws 253000-PKG

SCREW KITS

Slide Track Screw Kit 107033

Floor Plate Screw Kit 107004-*



PARTS DRAWINGS

RIGHT HAND SHOWN 3/4" OFFSET

Model L27

- (A) Pivot Stud 181770-ASY
- (B) Hex Cap 181778-*
- (C) Arm Cap & Screw 012142R*AS (RH, BRS) 012142L*AS (LH, BRS) 012144R*AS (RH, SS) 012144L*AS (LH, SS)
- (D) Arm x Locking Screw 1-3/4" Door 18550-Asy (RH) 18650-Asy (LH)

2" Door 18551-Asy (RH) 18651-Asy (LH)


2-1/4" Door 18552-Asy (RH) 18652-Asy (LH)

2-1/2" Door 18553-Asy (RH) 18653-Asy (LH)

3" Door 18554-Asy (RH) 18654-Asy (LH)

- (E) Arm Locking Screw Only 88905-PKG (5)
- (F) Spindle Shoulder Collar 259500-*
- (G) Heavy-Duty Thrust Bearing 41204-PKG (Includes 41207N spacer)

*specify finish

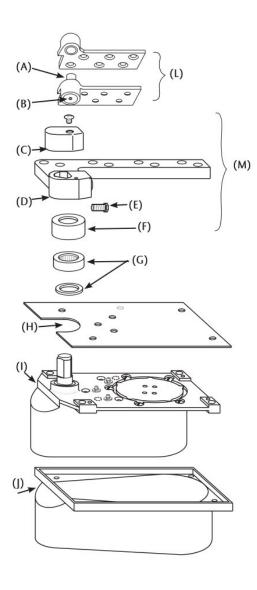

FOR L27 x 3/4" OFFSET

(L) 3/4" Offset Top Pivot F180 FL180

> Fire Rated L180 x 20 20 Minute

(M) Bottom Arm Package 1-3/4" Door 252051R*(RH) 252051L* (LH)

> 2" Door 252052R* (RH) 252052L* (LH)

> 2-1/4" Door 252053R* (RH) 252053L* (LH)

2-1/2" Door 252054R* (RH) 252054L* (LH)

3" Door 252055R* (RH) 252055L* (LH) (Includes: C, D, F and attaching screws)

- (H) Floor Plate with Screws 274050R* (RH) NHO 274050L* (LH) NHO 274750R* (RH) SHO 274750L* (LH) SHO
- (I) Closer Body (Specify Complete Model No. x LAP) (Includes G)
- (J) Cement Case with Screws 253001-PKG

SCREW KITS

L180 Screw Kit 107016-* Machine (2) Req 107116-* Wood (2) Req

Arm Screw Kit 107048 Machine (2) Req 107144 Wood (2) Req

Floor Plate Screw Kit 107004-*

Cement Case Screw Kit 107046


RIXSON ASSA ABLOY

Model Q27/QT27

RIGHT HAND SHOWN 3/4" OFFSET ONLY


- (A) Pivot Stud 181770-ASY
- (B) Hex Cap 181778-*
- (C) Arm Cap & Screw 73035R*AS (RH) 73035L*AS (LH)
- (D) Arm Mounting Screws and Plate 73014-*
- (E) Removable Arm 73001R-ASY (RH) 73001L-ASY (LH)
- (F) Arm Locking Screw Only 88905-PKG (5)
- (G) Arm Washer/Shim Package - 275179 (Includes 275065 and 275178 Torque Washer)
- (I) Q27 Styrofoam Filler 73009
- (P) QT Styrofoam Filler 73017
- (R) Spindle Shoulder Collar 259000-*

*specify finish

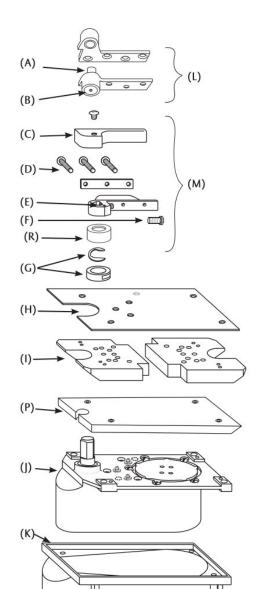

FOR Q27/QT27 x 3/4" OFFSET

- (L) 3/4" Offset Top Pivot 180 F180 (Fire Rated)
 - 180 x 20 (20 Minute)
- (M) Bottom Arm Package 222050R* (RH) 222050L* (LH) (Includes C, D, E, R and attaching screws)
- (N) 3/4" Offset Intermediate Pivot M19 FM19 Fire-Rated M19-20 20-Minute



- (H) Q Floor Plate with Screws 294050R* (RH) (NHO) 294050L* (LH) (NHO) 294750R* (RH) (SHO) 294750L* (LH) (SHO)
- (J) Closer Body (Specify Complete Model No. x LAP)
- (K) Cement Case with Screws 253000-PKG

SCREW KITS

180 Screw Kit 107014-* Machine (2) Req 107114-* Wood (2) Req

Q Floor Plate Screw Kit 107010-*

Cement Case Screw Kit 107046

M19 Intermediate Pivot Screw Kit 107015-* Machine (2 Req) 107115-* Wood (2 Req)




RIGHT HAND SHOWN 3/4" OFFSET


Model HM27

- (A) Arm Cap & Screw 73025R*AS (RH) 73025L*AS (LH)
- (B) Arm Mounting Screws and Plate 73014-*
- (C) Arm x Set Screw 73041R*AS (RH) 73041L*AS (LH)
- (D) Arm Locking Screw Only 88905-PKG (5)
- (E) Arm Shims (5) 275065-PKG
- (F) Arm Bearing Washer 275062-PKG-5
- (G) Spindle Shoulder Collar 259000-*


*specify finish







- (L) Bottom Arm Package 222050R*HM (RH) 222050L*HM (LH) (Includes A, B, C, G and attaching screws)
- (H) Floor Plate with Screws 274050R* (RH) (NHO) 274050L* (LH) (NHO) 274750R* (RH) (SHO) 274750L* (LH) (SHO)
- (I) Closer Body (Specify Complete Model No. x LAP)
- (J) Cement Case with Screws 253000-PKG
- (K) Special Offset Hinges (3) 254545*PK



Floor Plate Screw Kit 107004-

Cement Case Screw Kit 107046


Hinge Screw Kit 107519-*



PARTS DRAWINGS

RIGHT HAND SHOWN 3/4" OFFSET

- (A) Pivot Stud 181770-ASY
- (B) Hex Cap 181778-*
- (C) Arm Cap & Screw 012142R*AS (RH, BRS) 012142L*AS (LH, BRS) 012144R*AS (RH, SS) 012144L*AS (LH, SS)
- (D) 3/4" Offset Arm x Locking Screw 275177 (RH) 275176 (LH)
- (E) Arm Locking Screw Only 88905-PKG (5)
- (F) Arm Shims 275065-PKG (5)
- (G) Arm Bearing Washer 275062-PKG (5)
- (H) Spindle Shoulder Collar 259000-*



- (L) 3/4" Offset Top Pivot 180 FL180 (Fire Rated) 180 - 20 (20 Minute)
- (M) Bottom Arm Package 252050R* (RH) 252050L* (LH) (Includes C, D, H and attaching screws)
- (I) Floor Plate with Screws 204050-*
- (J) Closer Body (Specify Complete Model No. x LAP)
- (K) Cement Case with Screws 203000

SCREW KITS

180 Screw Kit 107014-* Machine (2) Req 107114-* Wood (2) Req

Arm Screw Kit 107044-* Machine (2) Req 107144-* Wood (2) Req

Floor Plate Screw Kit 107004-*




PARTS DRAWINGS

(A) Jamb Portion 3065


Model 28

- (B) Finish Plate 012202-*PK(BRS) 012204-*PK(SS)
- (C) Door Portion 30243
- (E) Arm Plate Shims (.062) 46045-PKG (5) Arm Plate Shims (.187) 46145-PKG (5)
- (F) Arm Plate & Stud Assy 46445
- (G) Arm Spindle Screw 01244010-PKG (5)
- (H) Arm Spindle Washer 01030-PKG (5)
- (I) Arm Set Screw Only 26087-PKG (5)
- (J) Arm & Arm Set Screw 282026M
- (K) Arm Alignment Screw & Washer (2) of each 107032-*
- (L) Arm Spindle Collar 259000-*
- (M) Floor Plate with Screws 284020R* (RH) NHO 284020L* (LH) NHO 284720R* (RH) SHO 284720L* (LH) SHO

*specify finish





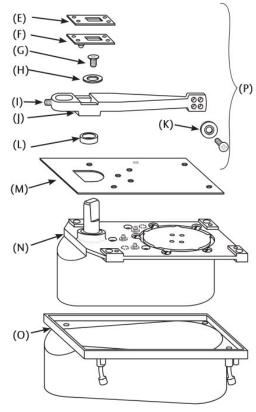

Wood Door Arm Package 282126 (D,E, F,I)

- (D) W28 Wood Door Plate & Shim Pkg 107066 (Includes 46145 & 46445)
- (P) Bottom Arm Package (E-K) 282026-*
- 554 Concealed Arm Package 282554 (Includes 107064)



- (N) Closer Body (Specify Complete Model No. x LAP)
- O) Cement Case with Screws 253000-PKG

SCREW KITS

340 Screw Kit 107329 Machine & Wood

Arm Screw Kit 107048-* Machine (2) Req

107144-* Wood (2) Req 554 Arm Screw Kit

107064 Floor Plate Screw Kit

107004-*




Model H28


PARTS DRAWINGS


- (A) Jamb Portion 308548
- (B) Finish Plate 012202-*PK (BRS) 012204-*PK (SS)
- (C) Door Portion 30141
- (D) Standard End Load Arm Package (minimum 2" door thickness) 262022 (Includes 107060
- (Includes 107060, 107045, and 107145) (E) Arm Spindle Collar
- (F) Heavy-Duty Thrust Bearing 41204-PKG (Includes 41207N)

259500-*

(G) Arm Shim Kit 107060







587 SIDE LOAD ARM PACKAGE FOR 1-3/4" DOOR



262587 (Includes G and attaching screws)

- (H) Floor Plate with Screws NHO 284020R* (RH 284020L* (LH) SHO 284720R* (RH) 284720L* (LH)
- (I) Closer Body (Specify Complete Model No. x LAP) (Includes 41204- PKG)
- (J) Cement Case with Screws 253001 - PKG

SCREW KITS

H340 Screw Kit 107329 Machine & Wood

587 Arm Screw Kit 107077 Machine 107145-* Wood

Arm Screw Kit 107045 Machine 107145 Wood

Floor Plate Screw Kit 107004-*




PARTS DRAWINGS

- (A) Jamb Portion 42801
- (B) Finish Plate 012202-*PK (BRS) 012204-*PK (SS)

Model 328/428

- (C) Patch Fitting Cover 7495 *
- (J) Bottom Pivot Insert 74101
- (K) Top Pivot Insert 74102


*specify finish





*Model 428 includes patch fittings, top pivot, cement case, closer body and floor plate shown below

- (D) Top Patch 7494-* PK (Includes C and K)
- (E) Bottom Patch 7495-* PK (Includes C and J)
- (F) Floor Plate with Screws NHO NHO 284020R* (RH) 284020L* (LH) SHO
 - 284720R* (RH) 284720L* (LH)
- (G) Closer Body (Specify Complete Model No. x LAP)
- (H) Cement Case with Screws 253000-PKGv







Model 30

PARTS DRAWINGS

- (A) Jamb Portion 3065
- (B) Finish Plate 012202-*PK(BRS) 012204-*PK(SS)
- (C) Door Portion 30243
- (E) Arm Plate Shims (.062) 46045-PKG (5)
- (E) Arm Plate Shims (.187) 46145-PKG (5)
- (F) Arm Plate & Stud Assy 46445
- (G) Arm & Arm Set Screw 302026
- (H) Arm Set Screw Only (5) 26087-PKG
- (I) Arm Alignment Screw & Washer (2) 107032-*
- (J) Arm Spindle Collar 259000-*







WD D Arm PKG 302126 (Includes D and G)

- (D) W30 Wood Door Plate & Shim PKG 107066 (Includes shims and special arm centering screws)
- (N) Bottom Arm Package 302026 -* (Includes E, G, I, J and attaching screws)
- (K) Floor Plate with Screws (1 large and 1 small) 304020-*
- (L) Closer Body (Specify Complete Model No. x LAP)
- (M) Cement Case with Screws 303000

SCREW KITS

H340 Screw Kit 107329 Machine & Wood

Arm Screw Kit 107048 Machine 107144 Wood

Floor Plate Screw Kit (2 req.) 107004-*

Cement Case Screw Kit 107014



(M)

WD DR Arm PKG

302126 (Includes D and G)


PARTS DRAWINGS

(A) Jamb Portion 3065


Model 40


- (B) Finish Plate 012202-*PK (BRS) 012204-*PK (SS)
- (C) Door Portion 30243
- (E) Arm Plate Shims (.062) 46045-PKG (5)
- (E) Arm Plate Shims (.187) 46145-PKG (5)
- (F) Arm Plate & Stud Assy 46445
- (G) Arm & Arm Set Screw 302026
- (H) Arm Set Screw Only 26087-PKG (5)
- (I) Arm Alignment Screw & Washer (2) 107032-*
- (J) Arm Spindle Collar 259000

*specify finish









(M)

- (N) Bottom Arm Package 302026 -* (Includes E,F, G, I, J)
- (K) Floor Plate with Screws (1large and 1small) 404020-*
- (L) Closer Body (Specify Complete Model No. x LAP)
- (M) Cement Case with Screws 403000

SCREW KITS

340 Screw Kit 107329 Machine & Wood

Arm Screw Kit 107048 Machine 107144 Wood

Floor Plate Screw Kit (2 req.) 107004-*





Model H40


PARTS DRAWINGS


- (A) Jamb Portion 308548
- Finish Plate 012202-*PK (BRS) 012204-*PK (SS)
- (C) Door Portion 30141
- (D) Standard End Load Arm Package (minimum 2" door thickness) 262022
- (E) Arm Spindle Collar 259500-*
- (F) Heavy-Duty Thrust Bearing 41204-PKG
- (G) Arm Shim Kit 107060


*specify finish












587 SIDE LOAD ARM PACKAGE For 1-3/4" Door



262587 (Includes G and attaching screws)

- (H) Floor Plate with Screws 1 Large 1 Small 404020 -*
- Closer Body (Specify Complete Model No. x LAP) (Includes 41204-PKG)
- Cement Case with Screws 403000

SCREW KITS

H340 Screw Kit 107329 Machine & Wood

587 Arm Screw Kit 107077 Machine 107145 Wood

Arm Screw Kit 107045 Machine 107145 Wood

Floor Plate Screw Kit (2 req.) 107004-*



HEAVY-DUTY FLOOR CLOSERS

NOTES



ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience



CONTACT US AT:

Rixson» 3000 Highway 74 East Monroe, NC 28112 Tel: 800-457-5670 Fax: 800-221-0489

ASSA ABLOY Door Security Solutions Canada 160 Four Valley Drive Vaughan, Ontario, L4K 4T9 Canada Tel: 800-461-3007

Fax: 800-461-8989

For a complete listing of products and applications please visit our web site. www.rixson.com www.assaabloy.ca

Risson® and Risson and Design® are registered trademarks of Yale Security Inc., an ASSA ABLOY Group company. Other products' brand names may be trademarks or registered trademarks of their respective owners and are mentioned for reference purposes only. Risson is a brand associated with Yale Security Inc., an ASSA ABLOY Group company. Copyright © 2001-2018, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.