

## Model 147

PIVOTS AND PIVOT SETS  
OFFSET HUNG

### Application

- Exterior or Interior Doors
- Weight to 600 lbs.\*
- Door Width up to 4'0" (1219mm)
- Handed

### Product Description & Features

- 180 top pivot included
- M19 intermediate pivot required (order separately)
- 3/4" (19mm) offset (measured from centerline of pivot to face of door)
- Door edges must be beveled 1/8" in 2"
- Bottom pivot mounts directly to floor
- Doors will swing 180°, trim permitting
- Uses same arm and cap as 27 floor closer
- Non-ferrous base material
- Doors 60" (1524mm) to 90" (2286mm) in height should use one intermediate pivot. Each additional 30" (762mm) of door height warrants another intermediate pivot
- Furnished with wood and machine screws

### Optional Features

- Available for 1-1/2" (38mm) offset (door weight 350 lbs.) for doors with cladding or frame molding
- Extended spindles available in 1/2" (13mm) increments up to 2" (51mm) longer than standard

### Compliance


- Available for fire door assemblies up to three hours (ferrous material) – specify F147. Intermediate pivot required by UL. Specify FM19 (order separately)
- For 20-minute label suffix "-20" to the part number
- ANSI/C07162/C07202

\* Door size & weight guidelines are determined using the appropriate number of intermediate pivots



### Technical Information

(Frame stop required)

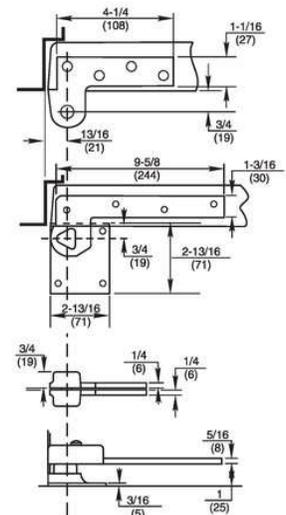

**RIXSON**  
**ASSA ABLOY**

Experience a safer  
and more open world