

Door Coordinators No. 2600 Series

Material: Steel

Finishes: Black prime coat, silver powder coat

Fastener: 7 ea. #12 - 24x1 $\frac{1}{4}$ TH type C tapping screws

Size: Standard device size $\frac{5}{8}$ " x 1 $\frac{5}{8}$ " x 52"

Features: Non-handed. Override protection to prevent damage in case of abnormal force on door
Mechanism and filler bar completely fill width of opening and when painted to match frame it becomes virtually invisible

Options: Specify make and model of exit device for vertical rod preparation

Ordering: Stock Sizes



No.	Opening	Weight	ANSI A156.3
2660	60"	7.0 lbs.	Type 21A
2672	72"	8.0 lbs.	Type 21A
2696	96"	9.75 lbs.	Type 21A

Custom Sizes — The 2600 Series coordinators are manufactured in different housing lengths to coordinate the full range of door sizes:


- NX2600 Series: For jamb opening widths (A + B dimension) from 48" - 54". E dimension, 42"
- 2600 Series: For jamb opening widths (A + B dimension) from 54" - 96". E dimension, 52"

Determining Coordinator Item Number

- Active door widths A plus inactive door width B equals the last two or three digits of all 2600 Series coordinator item numbers (2680 is for 80" door opening)
- Less than 48" jamb widths = NX2600 Series (NX2644 = 44" opening).
- Larger sizes are available (XL, XXL). Contact the factory


NOTE: Some panic hardware requires the coordinator to be factory prepped. Contact factory.

No.	Jamb Widths	Coordinator Length	ANSI A156.3
NX2648- NX2654	48"-54"	42"	Type 21A
2655 - 2660	55" - 60"	52"	Type 21A
2661 - 2672	61" - 72"	52"	Type 21A
2673 - 2696	73" - 96"	52"	Type 21A

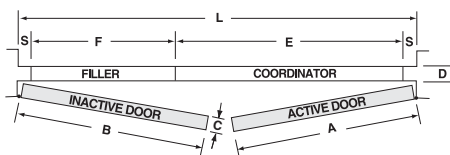

Fillers are usually supplied precut from the factory (filler bars shown on page E14).

NOTE: If "S" dimension is other than $\frac{5}{8}$ " advise the factory.

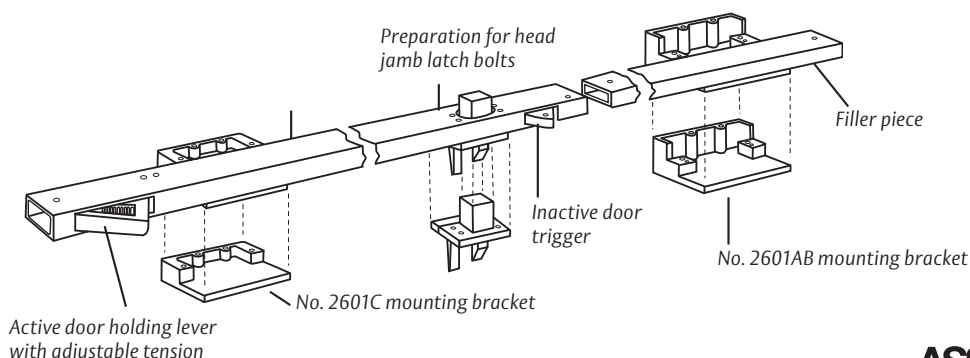

800-458-2424 | www.assaabloydooraccessories.us

Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ASSA ABLOY
Opening Solutions

Experience a safer
and more open world



Carry Bar for No. 1600 /2600 Series Coordinator No. 1100

- Material:** Brass, steel
- Finishes:** US3, US4, US10, US10B, US26, US26D, and black prime coat
- Fastener:** 2 ea. $\frac{1}{4}$ -20x1 RH MS, 2 ea. $\frac{1}{4}$ -20 x $1\frac{11}{16}$ sex bolts
- Other:** A carry bar is used when it is possible to open the inactive door before opening the active door

No.	Size	Weight
1100	$1\frac{3}{4}$ " x $2\frac{1}{4}$ "	0.3 lbs.



Filler Bar for No. 1600 /2600 Series Coordinator No. FB-1, FB-2

- Material:** Steel
- Finishes:** Black prime coat, silver powder coat
- Features:** Filler bar is supplied at no charge with the No. 1600 and 2600 Series coordinator (shown on pages E12 & E13)

No.	Size
FB-1	Specify length from $1\frac{5}{8}$ " to $18\frac{5}{8}$ "
FB-2	Specify length from $19\frac{5}{8}$ " to $42\frac{5}{8}$ "

Contact factory for larger sizes.



2601AB



2601C

Mounting Brackets (for Soffit Applied Hardware) No. 2601AB, 2601C

- Material:** Aluminum
- Finishes:** Black prime coat, silver powder coat
- Fastener:** 4 ea. $\frac{1}{4}$ -20 x $\frac{1}{2}$ " FH MS, 4 ea. #12-24 x 2" FH MS.
- Features:** Used for stop applied hardware. Prevents the inadvertent disabling of the coordinator by fasteners passing through the housing

No.	Soffit Size	Length	Weight
2601AB	$\frac{7}{8}$ " - $2\frac{1}{4}$ "	5"	0.9 lbs.
2601C	Over $2\frac{1}{4}$ "	5"	0.8 lbs.



Universal Door Coordinator No. 1700

- Material:** Steel
- Finishes:** Black prime coat, silver powder coat
- Fastener:** 4 ea. 10-24 x 2" flat head machine screws and #10 x 2" sheet metal screws
- Features:** For pairs of doors up to 8' wide, with active door 36" or greater; non-handed. Stop mounted - no mounting brackets required for stop mounted hardware. If active door is less than 36" contact factory.

No.	Overall Size	Weight	ANSI A156.3
1700	$1\frac{1}{2}$ " x $25\frac{9}{16}$ " x $\frac{3}{4}$ "	2.65 lbs.	Type 21B

NOTE: Not for use with surface vertical panic devices.

ASSA ABLOY
Opening Solutions

Experience a safer
and more open world

800-458-2424 | www.assaabloydooraccessories.us
Check the web site for the up-to-date catalog

Copyright © 2012-2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.