



**Door Holder & Stop
No. 490**

Material: Cast Brass

Finishes: US26D

Other: Holder base: 2¾" w x 2½" h
Holder projection: 2⅛"
Strike base: 1" w x 2" h
Strike projection: 2"

No.	Fastener	Weight	ANSI A156.16
490	5 ea. #8 x 1 OH SMS, 3 ea. plastic anchors; 3 ea. 8-32 x 1¼ FH MS	0.8 lbs.	L01291



**Automatic Door Holder & Stop
No. 491, 491R, 491S**

Material: Cast Brass


Finishes: Available in standard architectural finishes (see page 7).

Other: Holder base: 2¾" w x 2½" h
Holder projection: 2⅛"
Strike base: 4" w x 2" h
Strike projection: 1¼"

Options: Strike risers available for larger clearances.

Features:

- For applications requiring door hold-open on a frequent basis.
- Screw hole design allows for precise alignment and then permanent attachment.

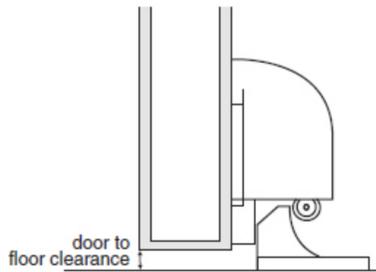

No.	Fastener	Strike	Clearance	Weight	ANSI A156.16
491	Strike: 3 ea. #12 x 1¼ FH WS, 3 ea. plastic anchors Body: 4 ea. #10 x 1¼ FH WS	floor	½" or less door to floor	1.5 lbs.	L01301
491R	Strike: 3 ea. 12-24 x 1 FH MS, 3 ea. lead anchors Body: 4 ea. #10 x 1¼ FH WS	floor	½" or less door to floor	1.5 lbs.	L01301
491S	Strike: 3 ea. 12-24 x 1 FH MS, 3 lead anchors Body: 4 ea. 10-24 x 1 FH MS; 4 ea. 10-24 x 1⅜ sex bolt	floor	½" or less door to floor	1.5 lbs.	L01301