


# APPLICATION DETAILS


## ALUMINUM, WOOD AND HOLLOW METAL DOORS

### Location from Door

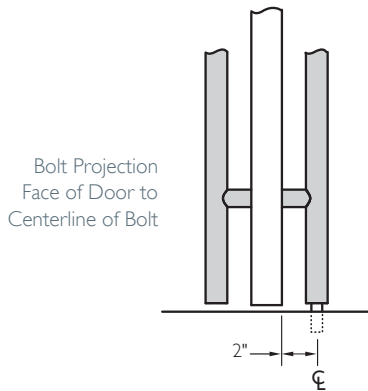

Locking pulls are available for  
1 3/8" to 2 1/2" thick aluminum, wood  
or hollow metal doors.


### Bolt Adjustment

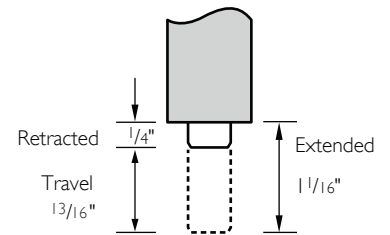

Adjusts 1/4" in and out from the shown factory settings.

### Bolt into Floor Models - Detail at Floor

- DBD - Half Height Pull - Bolts Down
- FHD - Full Height Pull - Bolts Down
- FHB - Full Height Pull - Bolts Up and Down

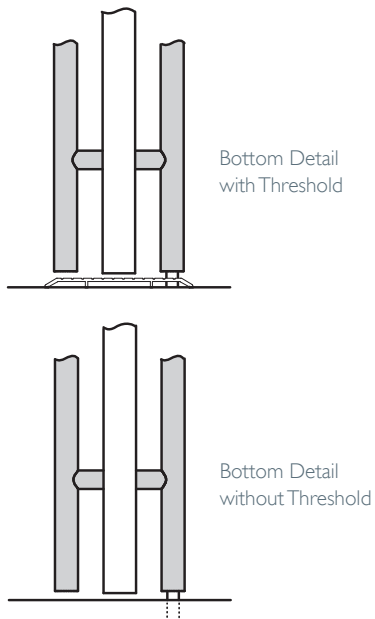

### Bolt into Head Models - Detail at Head

- DBU - Half Height Pull - Bolts Up
- FHU - Full Height Pull - Bolts Up
- FHB - Full Height Pull - Bolts Up and Down

