



Carry Bar for No. 1600 /2600 Series Coordinator No. 1100

Material: Brass, steel.
Finishes: US3, US4, US10, US10B, US26, US26D, and black prime coat.
Fastener: 2 ea. ¼ -20x1 RH MS, 2 ea. ¼ -20x1 11/16 sex bolts.

No.	Size	Weight
1100	1 3/4" x 2 1/4"	0.3 lbs.




Filler Bar for No. 1600 /2600 Series Coordinator No. FB-1, FB-2

Material: Steel.
Finishes: Black prime coat.
Features: Filler bar is supplied at no charge with the No. 1600 and 2600 Series coordinator (shown on pages E12 & E13).

No.	Size
FB-1	Specify length from 1 5/8" to 18 5/8"
FB-2	Specify length from 19 5/8" to 42 5/8"

Contact factory for larger sizes.

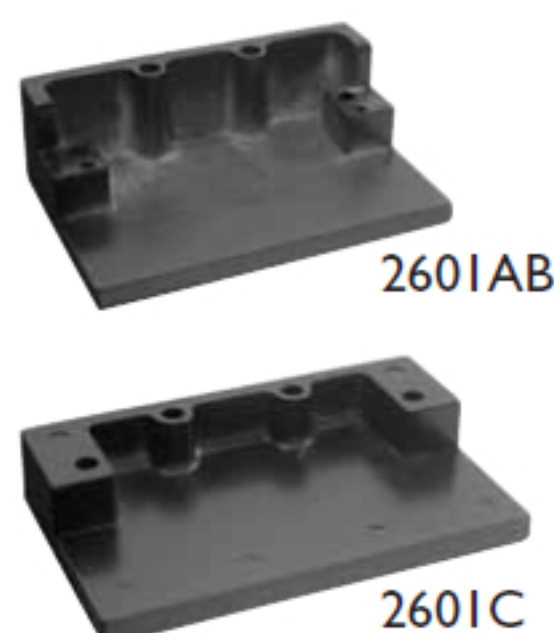

Mounting Brackets (for Soffit Applied Hardware) No. 2601AB, 2601C

Material: Aluminum.
Finishes: Black prime coat.
Fastener: 4 ea. ¼ -20x½" FH MS, 4 ea. #12-24x2" FH MS.
Features: Used for stop applied hardware. Prevents the inadvertent disabling of the coordinator by fasteners passing through the housing.

No.	Soffit Size	Length	Weight
2601AB	7/8" - 2 1/4"	5"	0.9 lbs.
2601C	Over 2 1/4"	5"	0.8 lbs.



NOTE: Not for use with surface vertical panic devices.

Universal Door Coordinator No. 1700

Material: Steel, aluminum.
Finishes: Black prime coat.
Fastener: 6 ea. #10x1 3/4" TH SMS, 6 ea. #10-32x1 1/2" TH MS.

No.	Overall Size	Weight	ANSI A156.3
1700	1 1/2" x 20 1/8" x 5/8"	2.8 lbs.	Type 21