



Lever Extension Flush Bolt With Bottom Fire Bolt No. 557 x 19BFB

Material: Flush bolt – brass

Bottom fire bolt – stainless steel

Finishes: Available in standard architectural finishes (see page 9)

Fastener: 7 ea. #8 x 3/4" FH combo screws

4 ea. #8 - 32 x 1/2" FH MS

4 ea. #8 counter sunk washer

Features:

- For Fire Rated Plastic & Wood Covered Fire Doors measuring up to 4'w x 9'h rated up to 20 minutes
- 3/4" bolt throw, 3/4" backset; door strength maintained by corner reinforcing plate
- When door is subjected to 230°F the plug and black plastic cover will melt allowing the bolt to project, locking the leaves together
- Bottom fire bolt eliminates need for floor prep
- Oversize fire bolt strike hole allows for slight door misalignment

No.	Size	Weight
557 x 19BFB	Top bolt: 1" x 6 3/4" Bottom bolt: 1 3/16" dia.	0.9 lbs.



Dust Proof Strike No. 570

Material: Brass

Finishes: Available in standard architectural finishes (see page 9)

Fastener: Adjustment nut

Spanner wrench


2 ea. #8 x 1 OH SMS, 2 ea. plastic anchors

2 ea. #8 - 32 x 3/4" OH MS, 2 ea. lead anchors

Features:

- Works with all Rockwood manual and automatic flush bolts
- Removable face plate for use with thresholds
- Adjustable height for carpeted areas

No.	Size	Weight	ANSI A156.16
570	Face plate: 1 3/8" x 2 7/8" Barrel: 7/8" dia. x 2" depth	0.4 lbs.	L04021

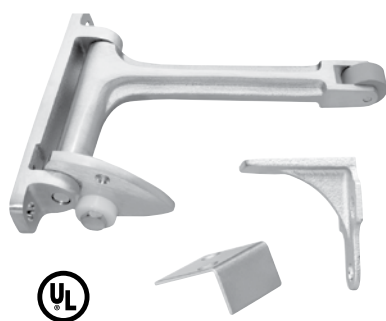

Gravity Door Coordinator No. 576

Material: Cast brass

Finishes: Available in standard architectural finishes (see page 9).

Fastener: Body: 2 ea. #10 x 1" FH SMS, 2 ea. #10 - 24 x 1" FH MS

Strike: 5 ea. #8 x 1" FH SMS

Other:

- For use on door sizes:
 - with Astragal on active door – 18" to 48"
 - with Astragal on inactive door – 18" to 34"
 - with Astragal on both doors – 18" to 30"
- The overlap of the astragal is maximum 7/8" with door hung on standard hinges. Customer must contact the factory for all other astragal situations

Features: Non-handed reversible. Prevents the active door from closing until the inactive door is closed

No.	Size	Projection	Weight	ANSI A156.3
576	1" x 5 7/16"	7"	2.2 lbs.	Type 21

ASSA ABLOY

The global leader in
door opening solutions

Door Coordinators No. 2600 Series

- Material:** Steel
- Finishes:** Black prime coat, silver powder coat
- Fastener:** 7 ea. #12 - 24x1 $\frac{1}{4}$ TH type C tapping screws
- Size:** Standard device size $\frac{5}{8}$ " x 1 $\frac{5}{8}$ " x 52"
- Features:** Non-handed. Override protection to prevent damage in case of abnormal force on door
 Mechanism and filler bar completely fill width of opening and when painted to match frame it becomes virtually invisible
- Options:** Specify make and model of exit device for vertical rod preparation
- Ordering:** Stock Sizes



No.	Opening	Weight	ANSI A156.3
2660	60"	7.0 lbs.	Type 21A
2672	72"	8.0 lbs.	Type 21A
2696	96"	9.75 lbs.	Type 21A

Custom Sizes — The 2600 Series coordinators are manufactured in different housing lengths to coordinate the full range of door sizes:


- NX2600 Series: For jamb opening widths (A + B dimension) from 48" - 54". E dimension, 42"
- 2600 Series: For jamb opening widths (A + B dimension) from 54" - 96". E dimension, 52"

Determining Coordinator Item Number

- Active door widths A plus inactive door width B equals the last two or three digits of all 2600 Series coordinator item numbers (2680 is for 80" door opening)
- Less than 48" jamb widths = NX2600 Series (NX2644 = 44" opening).
- Larger sizes are available (XL, XXL). Contact the factory


NOTE: Some panic hardware requires the coordinator to be factory prepped. Contact factory.

No.	Jamb Widths	Coordinator Length	ANSI A156.3
NX2648- NX2654	48"-54"	42"	Type 21A
2655 - 2660	55" - 60"	52"	Type 21A
2661 - 2672	61" - 72"	52"	Type 21A
2673 - 2696	73" - 96"	52"	Type 21A

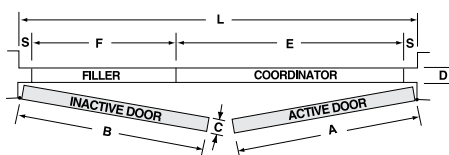

Fillers are usually supplied precut from the factory (filler bars shown on page E14).

NOTE: If "S" dimension is other than $\frac{5}{8}$ " advise the factory.

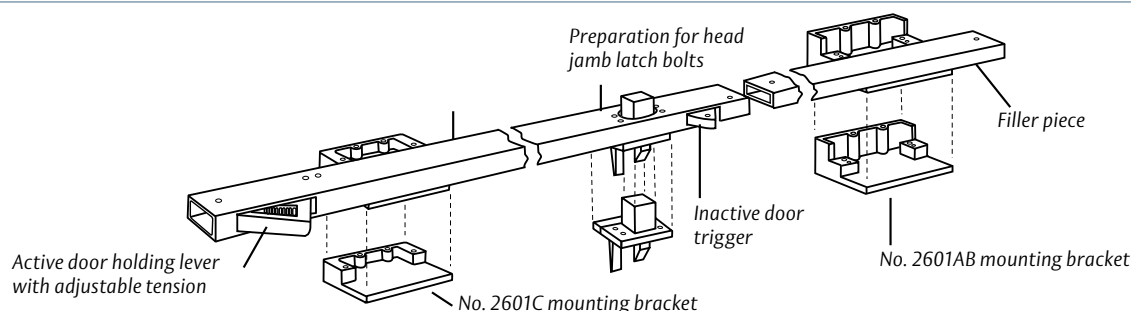

ASSA ABLOY

The global leader in
door opening solutions



Carry Bar for No. 1600 /2600 Series Coordinator No. 1100

- Material:** Brass, steel
- Finishes:** US3, US4, US10, US10B, US26, US26D, and black prime coat
- Fastener:** 2 ea. 1/4-20x1 RH MS, 2 ea. 1/4-20 x 1 11/16 sex bolts
- Other:** A carry bar is used when it is possible to open the inactive door before opening the active door

No.	Size	Weight
1100	1 3/4" x 2 1/4"	0.3 lbs.




Filler Bar for No. 1600 /2600 Series Coordinator No. FB-1, FB-2


- Material:** Steel
- Finishes:** Black prime coat, silver powder coat
- Features:** Filler bar is supplied at no charge with the No. 1600 and 2600 Series coordinator (shown on pages E12 & E13)

No.	Size
FB-1	Specify length from 1 5/8" to 18 5/8"
FB-2	Specify length from 19 5/8" to 42 5/8"

Contact factory for larger sizes.



2601AB



2601C

Mounting Brackets (for Soffit Applied Hardware) No. 2601AB, 2601C

- Material:** Aluminum
- Finishes:** Black prime coat, silver powder coat
- Fastener:** 4 ea. 1/4-20 x 1/2" FH MS, 4 ea. #12-24 x 2" FH MS.
- Features:** Used for stop applied hardware. Prevents the inadvertent disabling of the coordinator by fasteners passing through the housing

No.	Soffit Size	Length	Weight
2601AB	7/8" - 2 1/4"	5"	0.9 lbs.
2601C	Over 2 1/4"	5"	0.8 lbs.



Universal Door Coordinator No. 1700

- Material:** Steel
- Finishes:** Black prime coat, silver powder coat
- Fastener:** 4 ea. 10-24 x 2" flat head machine screws and #10 x 2" sheet metal screws
- Features:** For pairs of doors up to 8' wide. Non-handed. Stop mounted – no mounting brackets required for stop mounted hardware

No.	Overall Size	Weight	ANSI A156.3
1700	1 1/2" x 25 9/16" x 3 3/4"	2.65 lbs.	Type 21B

NOTE: Not for use with surface vertical panic devices.

ASSA ABLOY

The global leader in
door opening solutions