



Lever Extension Flush Bolt
No. 550

- Material:** Brass.
- Finishes:** Available in standard architectural finishes (see page 9).
- Fastener:** 8 ea. #8x3/4" FH combo screws.
- Features:**
- For Fire Rated Hollow Metal Swinging Doors measuring up to 4'w x 10'h rated up to and including 3 Hours.
 - 3/4" bolt throw, 3/4" rod backset.
 - 12" rod length (center of face to bolt end - retracted).
 - 1 1/2" adjustable bolt head.
- Options:**
- Other size rods available are 18", 24", 36", 48".
 - Use No. 570 Dust Proof Strike (shown on page E4) to prevent dirt blocking bottom strike.


No.	Size	Weight	ANSI A156.16
550	Face plate: 1 1/4" x 6 3/4" Strike: 1 5/16" x 2 1/4" Guide: 1" x 2"	1.7 lbs./2	L04251



Rabbet Piece No. 554

- Material:** Brass.
- Finishes:** Available in standard architectural finishes (see page 9).
- Fastener:** 2 ea. #8x1 1/4" FH WS.
- Other:** For use on rabbeted doors to fill mortise cut.

No.	Size	Weight	ANSI A156.16
554	1/2" x 6 3/4"	4.1 lbs./10	w/555 L04101

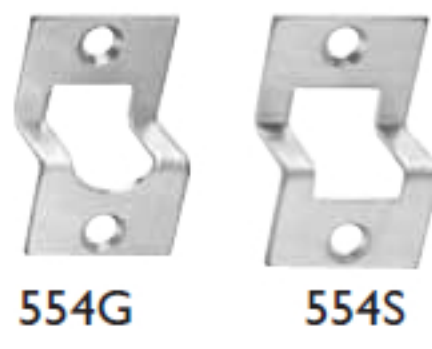

Rabbet Guides No. 554G, 554S

- Material:** Brass.
- Finishes:** Brass.
- Fastener:** 2 ea. #8 x 3/4" FH combo screws.



Lever Extension Flush Bolt
No. 555

- Material:** Brass.
- Finishes:** Available in standard architectural finishes (see page 9).
- Fastener:** 8 ea. #8x3/4" FH combo screws.
- Features:**
- For Fire Rated Hollow Metal Swinging Doors measuring up to 4'w x 10'h rated up to and including 3 Hours.
 - Fits ANSI A115 door and frame preparation.
 - 3/4" bolt throw, 3/4" rod backset.
 - 12" rod length (center of face to bolt end - retracted).
 - 1 1/2" adjustable bolt head.

No.	Size	Weight	ANSI A156.16
555	Face plate: 1" x 6 3/4" Strike: 1 5/16" x 2 1/4" Guide: 1" x 2"	1.5 lbs./2	L04251



Lever Extension Flush Bolt with Bottom Fire Bolt
No. 555 x 18BFB

- Material:** Flush bolt - brass.
Bottom fire bolt - stainless steel.
- Finishes:** Available in standard architectural finishes (see page 9).
- Fastener:** 8 ea. #8x3/4" FH combo screws.
- Features:**
- For Fire Rated Hollow Metal Swinging Doors measuring up to 4'w x 9'h rated up to and including 3 Hours.
 - Fits ANSI A115 door and frame preparation.
 - 3/4" bolt throw, 3/4" rod backset.
 - 12" rod length (center of face to bolt end - retracted).
 - 1 1/2" adjustable bolt head.
 - When door is subjected to 230°F the plug and black plastic cover will melt allowing the bolt to project, locking the leaves together.
 - Bottom fire bolt eliminates need for floor prep.
 - Oversize fire bolt strike hole allows for slight door misalignment.

No.	Size	Weight
555 x 18BFB	Top bolt: 1" x 6 3/4" Bottom bolt: 1 1/16" dia.	0.9 lbs.



Lever Extension Flush Bolt
No. 555

- Material:** Brass.
- Finishes:** Available in standard architectural finishes (see page 9).
- Fastener:** 8 ea. #8x3/4" FH combo screws.
- Features:**
- For Fire Rated Hollow Metal Swinging Doors measuring up to 4'w x 10'h rated up to and including 3 Hours.
 - Fits ANSI A115 door and frame preparation.
 - 3/4" bolt throw, 3/4" rod backset.
 - 12" rod length (center of face to bolt end - retracted).
 - 1 1/2" adjustable bolt head.

No.	Size	Weight	ANSI A156.16
555	Face plate: 1" x 6 3/4" Strike: 1 5/16" x 2 1/4" Guide: 1" x 2"	1.5 lbs./2	L04251



Lever Extension Flush Bolt with Bottom Fire Bolt
No. 555 x 18BFB

- Material:** Flush bolt - brass.
Bottom fire bolt - stainless steel.
- Finishes:** Available in standard architectural finishes (see page 9).
- Fastener:** 8 ea. #8x3/4" FH combo screws.
- Features:**
- For Fire Rated Hollow Metal Swinging Doors measuring up to 4'w x 9'h rated up to and including 3 Hours.
 - Fits ANSI A115 door and frame preparation.
 - 3/4" bolt throw, 3/4" rod backset.
 - 12" rod length (center of face to bolt end - retracted).
 - 1 1/2" adjustable bolt head.
 - When door is subjected to 230°F the plug and black plastic cover will melt allowing the bolt to project, locking the leaves together.
 - Bottom fire bolt eliminates need for floor prep.
 - Oversize fire bolt strike hole allows for slight door misalignment.

No.	Size	Weight
555 x 18BFB	Top bolt: 1" x 6 3/4" Bottom bolt: 1 1/16" dia.	0.9 lbs.