

Surface Bolts No. 630 Series


Material: Solid brass.

Finishes: US3, US10B, US26D, other finishes available on special order.

Features:

- Unique fiber gasket provides slide resistance without marring surface of bolt.
- 1" diameter knob.
- Supplied with universal and mortise strike.

No.	Fastener	Overall Size	Bolt Size	Bolt Length	Bolt Throw	Guides	Weight
630-4	8 ea. #6x $\frac{3}{4}$ " OH SMS	1 $\frac{5}{8}$ "x4 $\frac{3}{8}$ "	$\frac{5}{8}$ " half round	4"	$\frac{9}{16}$ "	2	2.5 lbs./5
630-8	8 ea. #6x $\frac{5}{8}$ " OH SMS	1 $\frac{5}{8}$ "x8"	$\frac{5}{8}$ " half round	8"	$\frac{9}{16}$ "	2	3.9 lbs./5
630-12	10 ea. #6x $\frac{5}{8}$ " OH SMS	1 $\frac{5}{8}$ "x12"	$\frac{5}{8}$ " half round	12"	$\frac{9}{16}$ "	3	5.3 lbs./5
630-24	12 ea. #6x $\frac{5}{8}$ " OH SMS	1 $\frac{5}{8}$ "x24"	$\frac{5}{8}$ " half round	24"	$\frac{9}{16}$ "	4	11.8 lbs./5

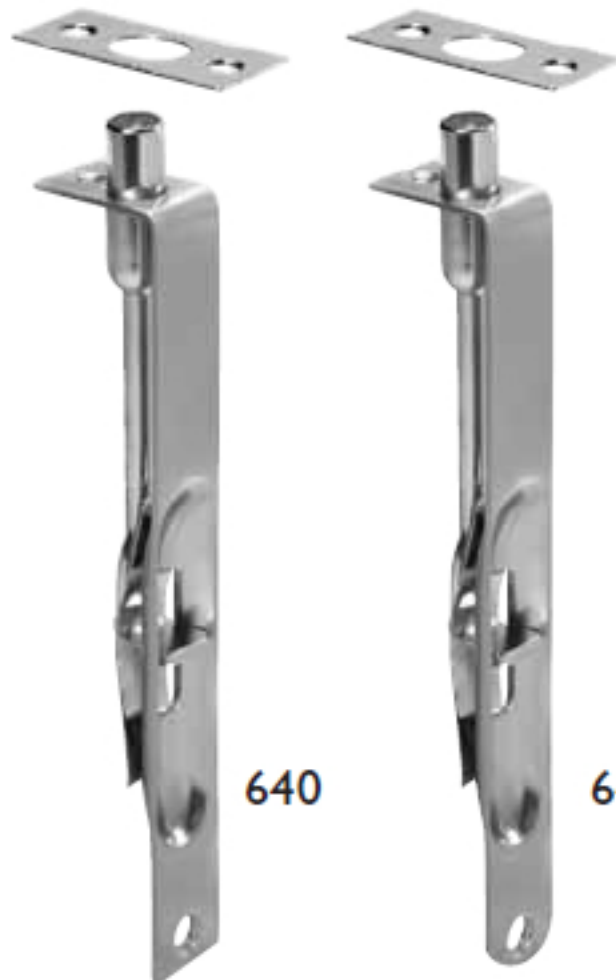

Residential Flush Bolts No. 640, 640RE

Material: Wrought brass.

Finishes: US3, US5, US26D.

Features: Spring action holds the bolt in either projected or retracted position.

No.	Fastener	Overall Size	Bolt Size	Bolt Throw	Guides	Weight
640	4 ea. #6x $\frac{3}{4}$ " FH SMS	$\frac{3}{4}$ "x6"	$\frac{1}{2}$ " dia.	$\frac{15}{16}$ "	$\frac{7}{8}$ "x2"	1.5 lbs./5
640RE	4 ea. #6x $\frac{3}{4}$ " FH SMS	$\frac{3}{4}$ "x6"	$\frac{1}{2}$ " dia.	$\frac{15}{16}$ "	$\frac{7}{8}$ "x2"	1.5 lbs./5