



**Surface Bolts
No. 580, 582 Series**

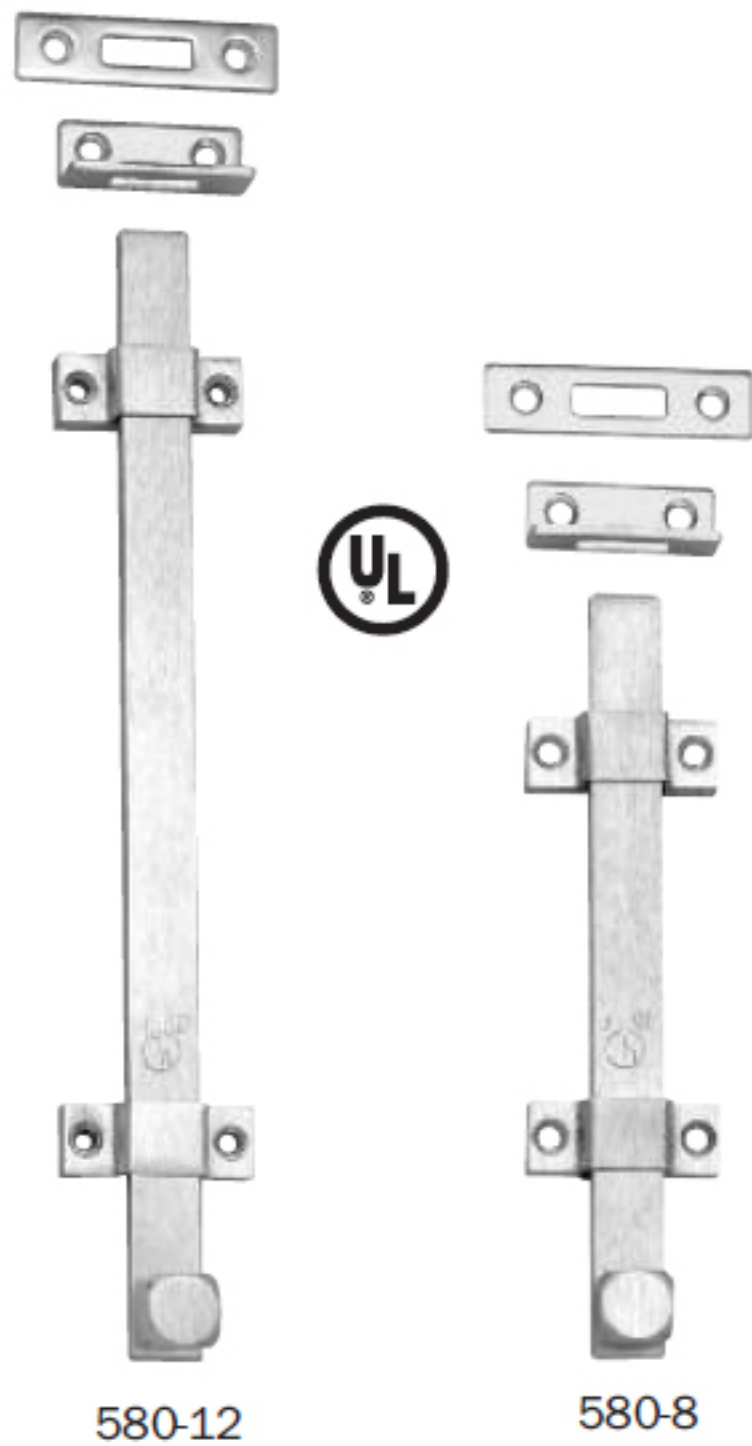


- Material:** No. 580: Steel, Stainless Steel
No. 582: Stainless Steel
- Finishes:** US3, US10, US10B Painted, US26D, US32D
- Fastener:** No. 580: 8 ea. #10 x 1¼ FH SMS, 8 ea. 10-24 x 1 FH MS
No. 582: Bolt: 4 ea. 10-24 x 1½ PH MS; 4 ea. #10 x 1¼ PH WS
Strikes: 6 ea. 10-32 x 1½ FH MS; 6 ea. 10-32 x 1½ FH WS
- Other:** 1½" bolt throw, ¼" x ¾" bolt material.
- Features:**
- **No. 580 series bolts are UL listed** for use on inactive leaf of a pair of 3-hour labeled fire doors.
 - No. 580 and No. 582 series both Include a universal top strike and a mortise bottom strike.
 - No. 582 series has a bracket for padlock (*padlock not included*).
- Options:** Sex bolts available for extra secure mounting.

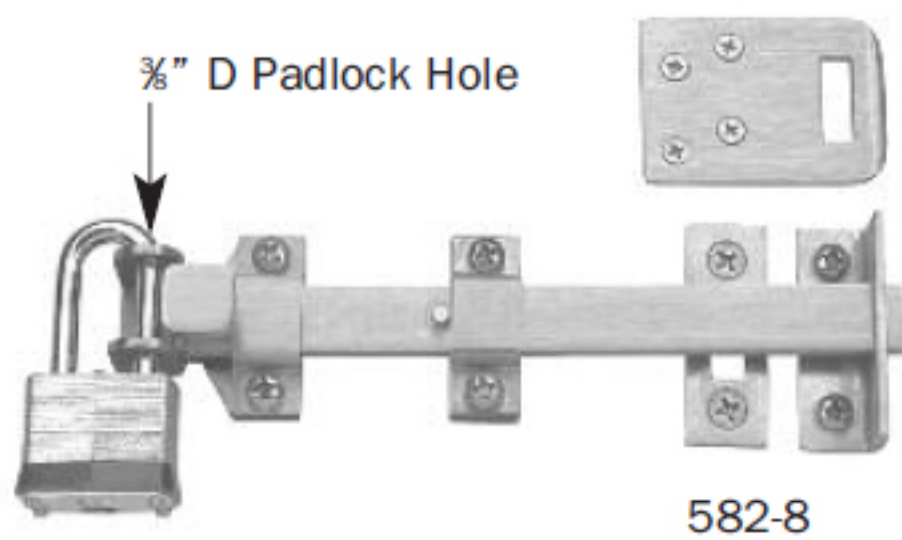

No.	Bolt Length	Weight	ANSI A156.16
580-8	8"	1.1 lbs.	L04161
580-12	12"	1.4 lbs.	L04161
580-18	18"	1.7 lbs.	L04161
580-24	24"	2.0 lbs.	L04161
582-8	8"	1.3 lbs.	
582-12	12"	1.6 lbs.	

**Heavy Duty Surface Bolts
No. 585 Series**

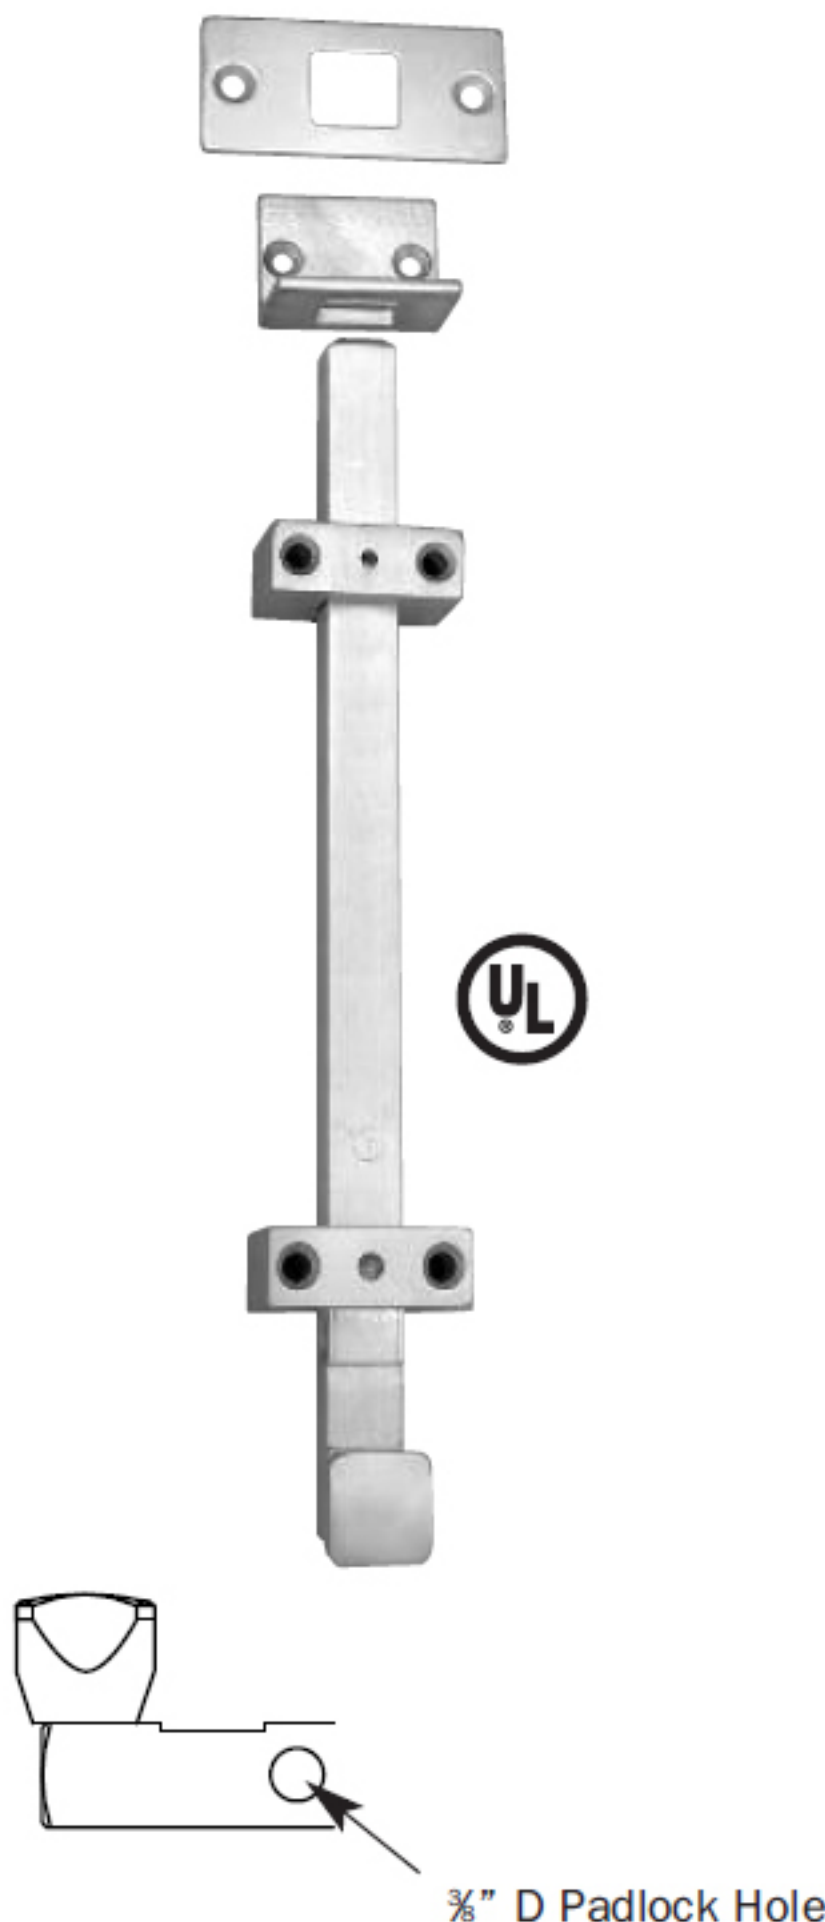

- Material:** Steel
- Finishes:** US26D
- Fastener:** Bolt: 4 ea. ¼-20 x 2¼ FH MS;
4 ea. ¼-20 x 1⅝ Sex Bolts
Strike: 2 ea. #14 x 2½ FH SMS, 2 ea. Plastic Anchors;
2 ea. ¼-20 x 1 FH MS, 2 ea. ¼-20 Lead Anchors
- Other:** 1¼" bolt throw, ¾" x ¾" bolt material.
- Features:**
- UL listed for use on inactive leaf of a pair of 3-hour labeled fire doors.
 - Includes a universal top strike and a mortise bottom strike.
 - Locks in both the up and down position.
 - Bolt locks automatically when thrown; can be released only by pressing knob toward door while retracting.
 - Can be used on any type of door.
 - Accomodates padlock.

No.	Bolt Length	Weight	ANSI A156.16
585-12	12"	3.9 lbs.	L04161
585-24	24"	6.1 lbs.	L04161