

CONDENSED CATALOG

Push Plates


Door Pulls

Door Stops

Bolts & Latches

Kick Plates

Custom Designs

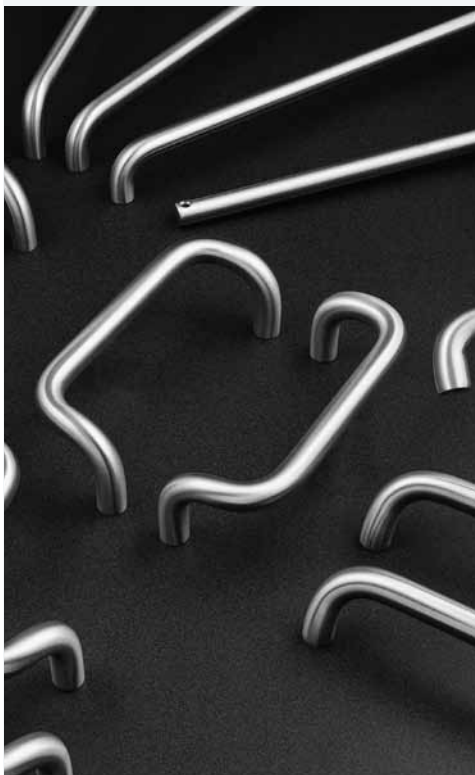

ROCKWOOD

ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions.


Introduction

For over 60 years, Rockwood Manufacturing Company has taken pride in its reputation for producing quality hardware solutions. We carry our high standards of fabrication right through to the finishing process. Strict attention to detail from the selection of top-grade materials to the application of the finest finishes results in a tough, yet handsome product of the highest caliber.

The items shown in this catalog are only a representative selection of our line. We have standard items for hospitals, schools, and other institutions. We also have a wide selection of hardware including door stops, coat and hat hooks, signs and filler plates. Please see our representative in your area or visit our web site at www.rockwoodmfg.com to view our Full Line Catalog.

Custom Designs

Design your own hardware! Whether it is a modification of a standard product or a completely unique design, Rockwood will quote your requirements and offer suggestions for best mounting applications. We take special pride in our custom products. For more information on custom products, please contact our sales staff or refer to our Full Line Architectural Hardware Catalog.

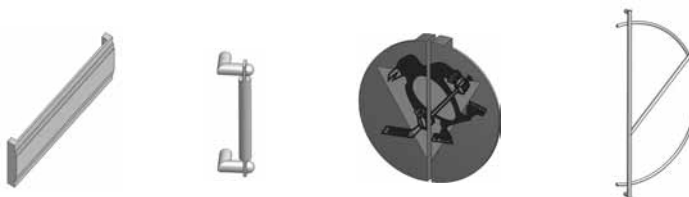

Special Architectural Finishes

US32DMS — use MicroShield antimicrobial coating to help prevent bacterial growth and to help attain LEED credit for Mold Prevention.

US32316 and US32D316 — Alloy 316 stainless steel for superior corrosion resistance.

US3LIFETIME — Never tarnish brass.

WPC, BPC, RPC — Powder coat color finishes (white, black, red).



MicroShield®

As part of their promise to provide innovative solutions to their customers, certain ASSA ABLOY Group brands offer the MicroShield® technology, a silver-based antimicrobial coating designed to inhibit the growth of bacteria.

MicroShield® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company.

Push Plates

Produced from the largest available selection of base metals and finishes. A complete listing may be found in our Full Line Architectural Catalog. The push plates are a standard .050" thick and other thicknesses are available upon request. They meet ANSI 156.6 standards. Plates can be mated with most any door pull of your choice.




70-73

.050 Thick Material

| No. | Size |
|-----|-----------|
| 70A | 3" x 12" |
| 70B | 3½" x 15" |
| 70C | 4" x 16" |
| 70E | 6" x 16" |
| 70F | 8" x 16" |

.125 Thick Material

| No. | Size |
|-----|-----------|
| 73A | 3" x 12" |
| 73B | 3½" x 15" |
| 73C | 4" x 16" |
| 73E | 6" x 16" |
| 73F | 8" x 16" |



76


77

Decorative Push Plates

| No. | Size |
|-----|-----------|
| 76B | 3½" x 15" |
| 76C | 4" x 16" |
| 77B | 3½" x 15" |
| 77C | 4" x 16" |

Flush Pulls

These flush pulls are available in all architectural finishes. All face plates are fabricated from 1/8" thick material providing a solid appearance and structure. Tamperproof torx or security socket machine screws can be furnished for high security installations. The 94C, 95A, 95B, and 95R are concealed mounted by screws in the side wall of the recess cup area.



91

94C

BF97L



95R

95A

95B

| No. | Size | Grip Opening |
|-------|------------|--------------|
| 91 | 3½" x 15¾" | — |
| 94 | 3½" x 5" | 1¾" x 3⅞" |
| 94C | 3½" x 5" | 1¾" x 3⅞" |
| 95A | 2⅜" x 3¼" | 7/8" x 2⅞" |
| 95B | 2⅜" x 4⅜" | 1⅞" x 3½" |
| 95R | 3½" dia. | 2¾" x 1⅞" |
| BF97 | 5" x 5" | 2½" x 3½" |
| BF97L | 5" x 5" | 2½" x 3½" |

Pulls

PULL PLATES

These are just a few of our most popular pull plates and are available in all architectural finishes. They are .050" thick wrought and meet ANSI 156.6 standards.



107x70C



122x70C

| No. | Pull CTC | Pull Size |
|---------|----------|---------------|
| 102x70B | 5½" | ⅝" Diameter |
| 102x70C | 5½" | ⅝" Diameter |
| 105x70B | 5½" | ¾" Diameter |
| 105x70C | 5½" | ¾" Diameter |
| 106x70B | 6" | ¾" Diameter |
| 106x70C | 6" | ¾" Diameter |
| 107x70B | 8" | ¾" Diameter |
| 107x70C | 8" | ¾" Diameter |
| 122x70B | 6" | ⅝" × 1¼" |
| 122x70C | 6" | ⅝" × 1¼" |
| 125x70B | 6" | 1" half round |
| 125x70C | 6" | 1" half round |

DECORATIVE PULL PLATES

These pull plates are .050" thick wrought, stocked in standard architectural finishes, and meet ANSI 156.6 standards.



147x76B



148x77B

| No. | Pull CTC | Plate Size |
|-----------|----------|------------|
| 147 × 76B | 6" | 3½" × 15" |
| 147 × 76C | 6" | 4" × 16" |
| 147 × 77B | 6" | 3½" × 15" |
| 147 × 77C | 6" | 4" × 16" |
| 148 × 76B | 8" | 3½" × 15" |
| 148 × 76C | 8" | 4" × 16" |
| 148 × 77B | 8" | 3½" × 15" |
| 148 × 77C | 8" | 4" × 16" |

Pulls

DOOR PULLS

These sturdy pulls will enhance the look of any door. They may be thru bolt singly, or mounted in pairs back to back. They are manufactured from 1" diameter solid bar stock. Because they are fabricated in our own factory, a variety of modifications may easily be made. These door pulls are available in standard and special architectural finishes, and conform to ANSI 156.6 standards.



110



back to back


Straight

| No. | CTC |
|--------|-----|
| 110 | 8" |
| 111 | 10" |
| 112 | 12" |
| 110BTB | 8" |
| 111BTB | 10" |
| 112BTB | 12" |

BF prefix = Barrier Free
BTB suffix = Set of 2 Back To Back



BF156



back to back

Offset

| No. | CTC |
|-----------|-----|
| BF156 | 8" |
| BF157A | 9" |
| BF157 | 10" |
| BF158 | 12" |
| BF156BTB | 8" |
| BF157ABTB | 9" |
| BF157BTB | 10" |
| BF158BTB | 12" |

POSTMOUNT DOOR PULLS

Shown below is a small selection of our many architectural door pulls. Custom lengths are readily available. Refer to our full color Architectural Hardware Brochure for a large variety of unique and attractive door pulls.



RM3110

PostMount Straight Pulls

| No. | Dia. | CTC |
|--------|------|---------------|
| RM3100 | 1" | 8", 10", 12" |
| RM3110 | 1¼" | 8", 11", 16" |
| RM3120 | 1½" | 11", 16", 20" |



RM3140

PostMount Offset Pulls

| No. | Dia. | CTC |
|--------|------|---------------|
| RM3130 | 1" | 8", 10", 12" |
| RM3140 | 1¼" | 8", 11", 16" |
| RM3150 | 1½" | 11", 16", 20" |



RM3210

NeoTek™ Straight Pulls

| No. | Dia. | CTC |
|--------|------|---------------|
| RM3200 | 1" | 8", 10", 12" |
| RM3210 | 1¼" | 8", 11", 16" |
| RM3220 | 1½" | 11", 16", 20" |



RM3240

NeoTek™ Offset Pulls

| No. | Dia. | CTC |
|--------|------|---------------|
| RM3230 | 1" | 8", 10", 12" |
| RM3240 | 1¼" | 8", 11", 16" |
| RM3250 | 1½" | 11", 16", 20" |

the good design studio

The Good Design Studio - your resource for beautiful doors, frames and hardware from ASSA ABLOY Group brands. Visit www.thegooddesignstudio.com to learn more.



Corbin Russwin 107 and SARGENT ME lever



McKinney 2 knuckle hinge with square end tips




Rockwood closet door pull

Pulls

HEAVY DUTY OFFSET DOOR PULLS

These solid 1¼" diameter heavy duty pulls are designed for mounting on rough surface areas. The large footprint on door provides stable mounting. Pulls are available in all architectural finishes and conform to ANSI 156.6 standards.



BF258

| No. | CTC |
|-------|-----|
| BF257 | 10" |
| BF258 | 12" |

| No. | CTC |
|-------|-----|
| BF259 | 18" |
| BF260 | 24" |

SECURITY LOOP DOOR PULL

Choose from brass or stainless steel material. Available in US4, US32D, and US32DMS finishes and conform to ANSI 156.6 standards. Supplied with security torx screws.



DI33

| No. | CTC |
|------|--------|
| DI33 | 7 1/2" |

HEAVY DUTY SECURITY FLUSH PULL

The #D89 is made from cast brass material. Available in US4 and US26D finishes and conform to ANSI 156.6 standards. Supplied with security torx screws.



D89

| No. | Size |
|-----|---------|
| D89 | 4" x 5" |

VANDAL RESISTANT TRIM

Heavy duty 1/8" stainless steel construction, thru bolt mounted, and has a tamper resistant design. The VRT22 features a soft black textured grip.



VRT14



VRT16



VRT24



VRT26

| No. | CTC |
|-------|--------------|
| VRT14 | 5 7/8" x 12" |
| VRT16 | 5 7/8" x 12" |
| VRT24 | 5 7/8" x 12" |
| VRT26 | 5 7/8" x 12" |

Pull Bars/Push Bars/Door Pulls

PUSH AND PULL BARS

Push and pull bar sets are available with an assortment of components and mounting applications which provide ample opportunity for meeting your individual requirements. These push bars are custom made to the center-to-center dimension required to fit your doors.



11047

Straight (1" Diameter)

| No. | CTC Pull/Push |
|--------|---------------|
| 11047 | 8" x specify |
| 111A47 | 9" x specify |
| 11147 | 10" x specify |
| 11247 | 12" x specify |

Offset (1" Diameter)

| No. | CTC Pull/Push |
|----------|---------------|
| BF15647 | 8" x specify |
| BF157A47 | 9" x specify |
| BF15747 | 10" x specify |
| BF15847 | 12" x specify |



BF15647

Straight (1¼-1½" Diameter)

| No. | CTC Pull/Push | Dia. |
|-------|---------------|------|
| RM351 | 12" x specify | 1¼" |
| RM352 | 18" x specify | 1¼" |
| RM371 | 12" x specify | 1½" |
| RM372 | 18" x specify | 1½" |

Offset (1¼-1½" Diameter)

| No. | CTC Pull/Push | Dia. |
|-------|---------------|------|
| RM251 | 12" x specify | 1¼" |
| RM252 | 18" x specify | 1¼" |
| RM271 | 12" x specify | 1½" |
| RM272 | 18" x specify | 1½" |

PUSH BARS

These 1" diameter push bars with base plates are available in standard and special architectural finishes. They meet ANSI 156.6 standards. These push bars are custom made to the center-to-center dimension required to fit your doors.



BP47



BP47-2



BP47-3

Straight (1¼-1½" Diameter)

| No. | CTC | Projection |
|--------|---------|------------|
| BP47 | specify | 2⅝" |
| BP47-2 | specify | 2⅝" |
| BP47-3 | specify | 2⅝" |

Pull Bars/Push Bars/Door Pulls

MegaTek™ DOOR PULLS

Rockwood uses the latest technology combined with careful craftsmanship giving this line a stable, rugged construction. These pulls come in various shapes, dimensions and in most architectural finishes. Available in 1" solid and 1¼" and 1½" diameter tubing. Refer to our full color Architectural Hardware Brochure for a large variety of unique and attractive door pulls. Specify CTC of mounting posts and overall length (up to 120").



RM3301

Straight Pulls - Square Ends

| No. | Diameter | Projection |
|--------|----------|------------|
| RM3300 | 1" | 2¾" |
| RM3301 | 1¼" | 3" |
| RM3302 | 1½" | 3¼" |



RM3321

Straight Pulls - Round Ends

| No. | Diameter | Projection |
|--------|----------|------------|
| RM3320 | 1" | 2¾" |
| RM3321 | 1¼" | 3" |
| RM3322 | 1½" | 3¼" |



RM3341

Straight Pulls - Bent Ends

| No. | Diameter | Projection |
|--------|----------|------------|
| RM3340 | 1" | 3" |
| RM3341 | 1¼" | 3" |
| RM3342 | 1½" | 3½" |



RM3311

Offset Pulls - Square End


| No. | Diameter | Projection |
|--------|----------|------------|
| RM3310 | 1" | 2½" |
| RM3311 | 1¼" | 2¾" |
| RM3312 | 1½" | 3" |



RM3331

Offset Pulls - Round Ends


| No. | Diameter | Projection |
|--------|----------|------------|
| RM3330 | 1" | 2½" |
| RM3331 | 1¼" | 2¾" |
| RM3332 | 1½" | 3" |

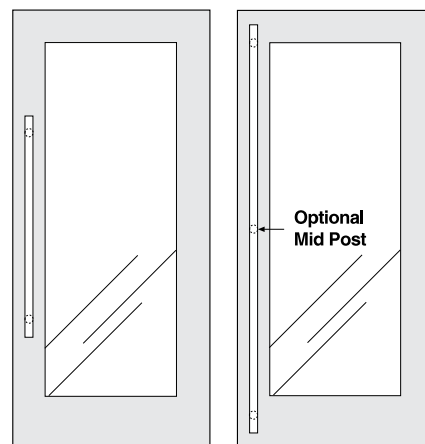

Door Stops & Silencers

WALL BUMPERS

Durable and simple to install and have the added advantage of concealed fastenings. They are readily available from stock in all standard architectural finishes and in both cast and wrought materials. Plastic Toggle mount with SMS.



| No. | Bumper | Material | Size |
|-----|---------|----------|-------------------------|
| 400 | Convex | Cast | 2 $\frac{7}{16}$ " Dia. |
| 403 | Concave | Cast | 2 $\frac{7}{16}$ " Dia. |
| 406 | Convex | Wrought | 2 $\frac{1}{2}$ " Dia. |
| 409 | Concave | Wrought | 2 $\frac{1}{2}$ " Dia. |

DOMESTOPS

Made from solid cast brass. Risers are also available for use in carpeted/non-carpeted installations and provide a stable base for mounting the dome stop. Available in most architectural finishes.



| No. | Material | Base Size | Height |
|------|------------|--|--------------------|
| 440 | Cast Brass | $\frac{1}{4}$ "h x 2" Dia. | 1 $\frac{1}{8}$ " |
| 441H | Cast Brass | $\frac{7}{32}$ "h x 1 $\frac{1}{8}$ " Dia. | 1 $\frac{1}{16}$ " |
| 442 | Cast Brass | $\frac{1}{2}$ "h x 2" Dia. | 1 $\frac{1}{2}$ " |
| 446 | Brass | 1 $\frac{1}{4}$ " Dia. | 1 $\frac{1}{2}$ " |

ROLLER STOPS

Designed to prevent interfering doors from damaging each other. Available in most architectural finishes.



| No. | Material | Base | Projection |
|------|------------|---------------------------------------|--------------------|
| 455 | Cast Brass | 1 $\frac{5}{8}$ " x 2 $\frac{1}{4}$ " | 3" |
| 456 | Cast Brass | 2" Dia. | 4 $\frac{1}{16}$ " |
| 456L | Cast Brass | 2" Dia. | 6 $\frac{1}{4}$ " |

KICK DOWN DOOR STOPS

The #461 features a unique patent assembly that allows no axle pin to show in the base and also provides a locating means that holds the door holder arm in the proper position.



| No. | Material | Base | Projection |
|------|----------|--|-------------------|
| 460 | Aluminum | 2 $\frac{1}{16}$ " x 1 $\frac{3}{8}$ " | 4" |
| 461 | Brass | 2 $\frac{1}{4}$ " x 1 $\frac{1}{4}$ " | 3 $\frac{3}{8}$ " |
| 461L | Brass | 2 $\frac{1}{4}$ " x 1 $\frac{1}{4}$ " | 4 $\frac{3}{8}$ " |

Door Stops & Silencers

HEAVY DUTY DOOR STOPS

Specially designed for use in rugged situations and security areas. The resilient bumper is fire retardant.



| No. | Size |
|-----|-------------------|
| 462 | 2"d x 1½"h |
| 463 | 2"d x 1¾"h (Torx) |
| 465 | 3⅞"d x 2"h |

| No. | Size |
|-----|------------|
| 466 | 2"d x 1½"h |
| 467 | 2"d x 3½"h |

DOOR STOPS

Our clean design and solid casting make these Rockwood door stops a decorative and functional alternative to other styles of stops. They are available in most architectural finishes.



| No. | Material | Base | Projection |
|---------|------------|--|------------|
| 470-471 | Cast Brass | 2½" Dia. | 3" |
| 472-473 | Cast Brass | 2½" Dia. | 3¾" |
| 474-475 | Cast Brass | 2¼" Dia. | 3¾" |
| 476-477 | Cast Brass | 2¼" Dia. | 3¾" |
| 480-481 | Cast Brass | 2½" x 1¾" | 1⅝" |
| 482 | Cast Brass | 1½" x 2½" | 2⅞" |
| 483 | Cast Brass | 1⅝" x 2⅝" | 2¾" |
| 485 | Cast Brass | 1⅝" x 2⅝" | 3" |
| 486 | Steel | 2¾"h x 1½" wide top 2"w x 2½" long base | |
| 487 | Cast Brass | 2⅞" x 2⅞" | 3¾" |

AUTOMATIC DOOR HOLDER & STOPS

Designed for use in commercial buildings where it is desirable to hold a door open on a frequent basis.



| No. | Clearance |
|-----|--------------------------|
| 490 | 3¾" wall-to-door |
| 491 | ½" or less door-to-floor |
| 494 | 3¾" wall-to-door |

DOOR SILENCERS

Rubber door silencers for wood and metal doors.



| No. | Size | Frame Type |
|-----|--------------|------------|
| 608 | ½" dia. x ⅞" | metal |
| 609 | ⅜" x ¾" | wood |

Bolts/Coordinators

ROCKWOOD

ASSA ABLOY

UL LISTED AUTOMATIC FLUSH BOLTS

The patented non-handed cam triggering device is the heart of this smooth-acting mechanism; only five pounds of force is required to drive a pair of bolts allowing door closing devices to perform at maximum efficiency. An override feature prevents damage to doors or bolts should the bolt heads be prevented from penetrating either the top or bottom strikes. The bolts are adjustable for unusual clearance or conditions and have a thermal lock that automatically locks the inactive door under high heat conditions due to fire.

#1960 - for use on fire rated 20-minute wood core and composite doors up to 4'w x 9'h.


#1962 - for use on fire rated wood core and composite doors up to 1½ hours fire rating up to 4'w x 9'h. Sold in sets.

#1842 - for use on the inactive leaf of a pair of A, B, C, D, and E labeled metal doors up to 4'w x 9'h. Sold in sets.

#1942 - for use on the inactive leaf of a pair of B, C, D, and E labeled wood covered composite doors up to 4'w x 9'h. Sold in sets.

#1848 - for use on fire rated metal doors labeled A, B, C, D, & E up to 4'w x 9'h.

#1948 - for use on fire rated 20-minute wood core and composite doors up to 4'w x 9'h.

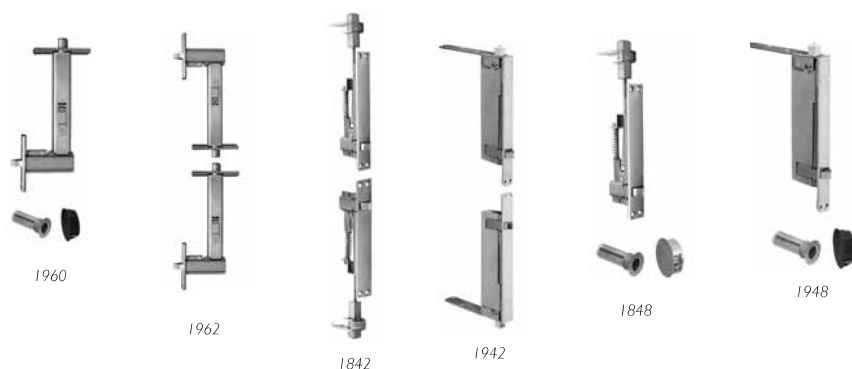

UL LISTED COMBINATION FLUSH BOLTS


The combination flush bolt uses one automatic flush bolt for the bottom of the door and a constant self-latching flush bolt for the top of the door. When the active leaf is opened, the bottom automatic flush bolt is opened. However the inactive leaf stays latched at the top until it is manually released by depressing the plunger on the bolt face. The top bolt engages each time the inactive door is closed.

#1845 - for use on A, B, C, D, and E labeled metal doors up to 4'w x 10'h.

#1945 - for use on B, C, D, and E labeled wood covered composite doors up to 4'w x 9'h. Sold in sets.

#1849 - for use on A, B, C, D, and E labeled metal doors up to 4'w x 10'h.


#1949 - for use on fire rated 20-minute wood core and composite doors up to 4'w x 9'h.

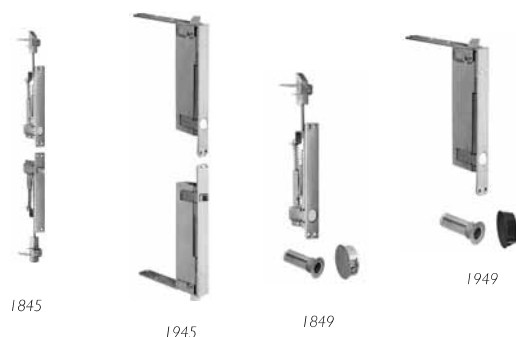

Bolts/Coordinators

FLUSH AND SURFACE BOLTS

Smooth acting with sturdy construction.




555 Flush Bolts - UL listed for use on A, B, C, D, and E labeled metal doors. Standard rod length is 12". Other lengths are available to order.

| No. | Size |
|-----|----------|
| 555 | 1" x 6¾" |

557 Flush Bolts - UL listed for all types of labeled wood fire doors. Door strength is maintained by a reinforcing plate. Simple installation instructions are enclosed in each box.

| No. | Size |
|-----|-----------|
| 557 | 1" x 6-¾" |



580 Series Surface Bolts - Heavy duty and UL listed for use on the inactive leaf of a pair of labeled fire doors.

| No. | Overall Size |
|--------|--------------|
| 580-8 | 8" |
| 580-12 | 12" |
| 580-18 | 18" |
| 580-24 | 24" |



630 Series Surface Bolts - Have an unique fiber gasket providing slide resistance without marring surface of bolt.

| No. | Overall Size |
|--------|--------------|
| 630-4 | 1½" x 4¾" |
| 630-8 | 1½" x 8" |
| 630-12 | 1½" x 12" |
| 630-24 | 1½" x 24" |

COORDINATORS

This non-handed coordinator (with companion filler) is designed to become an integral part of the door frame and when painted with the frame becomes virtually invisible. It is engineered to prevent damage in case of abnormal force against the door that is held open. The 1600 series is manufactured in three different housing lengths to coordinate the full range of door sizes.



| No. | Opening |
|------|---------|
| 1660 | 60" |
| 1672 | 72" |
| 1696 | 96" |

DUST PROOF STRIKE

Designed to work with any of our flush bolts. Use of these strikes eliminates the problem of floor strikes being clogged with dirt and debris. This combo unit can be used in any situation with or without the removable face plate.



| No. | Opening |
|-----|---|
| 570 | Face Plate: 1 7/8" x 2 7/8" Barrel: 7/8" dia. x 2" depth |

Door Protectors/Strikes

DOOR PLATES

Rockwood door plates are available for immediate shipment in all standard sizes and finishes. Standard metal thickness is .050"; however, a thinner economy gauge is available in US32D/630 stainless steel. Other thicknesses are also available. Door plates meet all ANSI A156.6 requirements.



Metal Door Plates - Standard

| No. | Material |
|--------|----------|
| K1050 | .050" |
| K1050F | .050" |

Plastic Door Plates - Heavy Duty

| No. | Material |
|-----------|---|
| K2060 | .060" |
| K2060SA-F | .060" Self-Adhesive  |

Available in Beige, Calcutta Black, Chocolate Brown, and Pewter Gray.

Metal Door Plates - Extra Heavy Duty

| No. | Material |
|-----------|----------|
| K1125 DIA | .125" |



Available in Brass, Bronze, Stainless, and Diamond Plate Aluminum.

Clear Plastic Door Plates


| No. | Material |
|-------|----------|
| K4125 | .125" |

DOOR EDGES


Most door edges are fabricated from .050" thick stainless steel; however, they are available in other metals and finishes. UL fire rated listed for stainless steel non-mortise applications; specify UL when ordering. These door edges are sized for 1 3/4" thick wood or metal doors. 306-AST and 306B-AST include an astragal, providing additional protection against vandalism.



| No. | Material | Edge |
|----------|------------------|--------|
| 306 | .050" | Square |
| 306-AST | .050" w/Astragal | Square |
| 306B | .050" | Bevel |
| 306B-AST | .050" w/Astragal | Bevel |



306



306-AST



306B



306B-AST

CORNER PROTECTORS

Corner Protectors — Corners of walls often suffer heavy abuse. Rockwood's corner guards are designed to prevent damage. Available in .050" thick stainless steel, brass and bronze. All materials have high impact strength and are easily made to your required size. Standard sizes include: 2" x 2" x 40", 2" x 2" x 48", 3" x 3" x 40", 3" x 3" x 48".



290




295

| No. | Mounting | Size |
|-----|----------|---------|
| 290 | Adhesive | Specify |
| 295 | Screw | Specify |

Door Protectors/Strikes

LOCK PROTECTORS


Heavy duty 12 gauge protection for latch bolts available in zinc plated steel or stainless steel. No. 320C and 320CL are notched for cylindrical locksets.

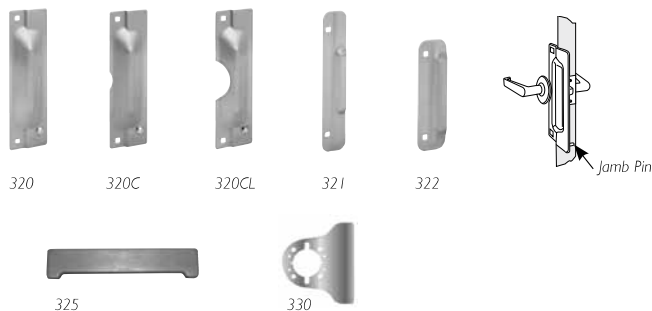

| No. | Size |
|-------|-----------|
| 320 | 3" x 11" |
| 320C | 3" x 11" |
| 320CL | 3" x 11" |
| 321 | 1½" x 10" |
| 322 | 1½" x 6" |
| 325 | 1⅞" x 9½" |
| 330 | 5⅜" x 6" |

TRIM PROTECTOR BARS

Our line of patented trim protector bars is designed to safely deflect traffic away from exit devices, door knobs/levers or other trim. The bars are mounted either directly below, over, or in front of the trim depending on the application. If you require a custom design, our engineering department can work to meet your needs.

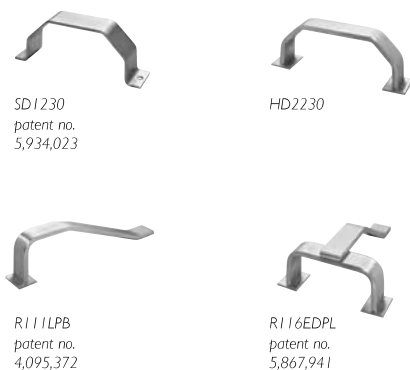

| No. | Projection | CTC |
|----------|------------|-----|
| SD1230 | 3¼" | 8" |
| SD1240 | 3¾" | 8" |
| SD1250 | 4¼" | 8" |
| SD1260 | 3¼" | 8" |
| HD2230 | 3¼" | 8" |
| HD2240 | 3¾" | 8" |
| HD2250 | 4¼" | 8" |
| R101LPB | 3¼" | 12" |
| R111LPB | 3¼" | 12" |
| R115LPB | 3¼" | 14" |
| R116EDPL | 3¼" | 8½" |
| R116EDPH | 4½" | 8½" |

CUSTOM STRIKES


Custom strikes are available by providing us with measurements for your special strike requirements. Lock strikes are .090" thick, unless otherwise specified.



Latches/Guards/Catches/Viewers/Signs

ROLLER LATCHES


These heavy duty roller latches have a variety of strikes to suit several different conditions. The latches feature heavy duty springs and solid nylon rollers for long life. They are adjustable to compensate for varying door to jamb clearance.

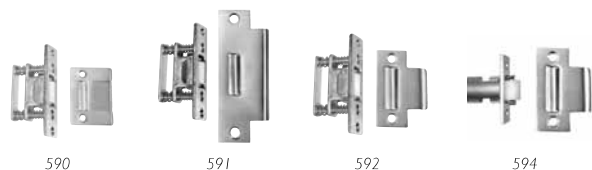

| No. | Size | Strike |
|-----|-----------------|------------------|
| 590 | 1" x 3 3/8" | 1 1/16" x 2 1/4" |
| 591 | 1" x 3 3/8" | 1 1/4" x 4 7/8" |
| 592 | 1" x 3 3/8" | 1 1/8" x 2 3/4" |
| 594 | 1 1/8" x 2 1/4" | 1 1/8" x 2 3/4" |

HOSPITAL LATCH


UL listed for use on fire doors. Supplied with standard or ASA strikes. Quality construction provides secure and silent latching action. Simple installation instructions are provided. Field reversible, this device is made to provide years of trouble-free operation.




| No. | Backset |
|----------|---------|
| 596 | 5" |
| 596S | 2 3/4" |
| 596 ASA | 5" |
| 596S ASA | 2 3/4" |

DOOR GUARDS & PRIVACY LATCH

Our #603 and #604 security door guards are easier to use than a chain door guard and eliminate the marring of the door frame caused by chain door guards. The #607 is designed to enhance privacy and the feeling of safety and security in hotels, residences, dorm rooms and more. UL classified as a fire door accessory.



603



604



607

EDGE GUARD

The #605 edge guard is designed to protect the door or frame from marring when used in conjunction with a #603 or #604 door guard.



605

WALL GUARD

With a clear adhesive mount.



606

MAGNETIC CATCHES

The heavy duty #900 catch includes a dual double-pole with self-aligning magnets. The #901 is extra heavy duty and includes a dual triple-pole with self-aligning magnets. Both can be used on pair of doors or single door.



900



901

Latches/Guards/Catches/Viewers/Signs

DOOR VIEWERS

The #620 door viewer features undistorted 160° field of vision. The #622 features a wide angle 190° field of vision. The #624 & #626 door viewers features privacy covers to prevent visual intrusion from outside of the room. (#624 is a 160° viewer and #626 is a 190° viewer). They are all UL listed.



#670 SERIES ENGRAVED SIGNS

These plastic or metal signs are available in .125" thick black or brown plastic or .050" thick aluminum, brass, bronze, or stainless steel. Standard letter size is 1" h x 1/8" w stroke. Sign size is determined by the height and length of the engraving. Conforms to ANSI 156.16 standards.



BF SERIES ADATACTILE SIGNS

These 8" x 8" tactile signs are available in .125" thick non-glare plastic or .050" thick aluminum, brass, bronze, or stainless steel. Easy to read lettering with Grade 2 braille translation. Plastic meets ADAAG section 4.30 requirements.



BFM SERIES ADA MOLDED PLASTIC SIGNS

These 6" x 9" signs have easy to read raised lettering with Grade 2 braille translation. Choice of blue or black background with 1" white lettering. Meets ADAAG section 4.30 requirements.



Rockwood Manufacturing Company

P.O. Box 79

Rockwood, PA 15557

Phone: (800) 458-2424 • Fax: (800) 922-9212

www.rockwoodmfg.com • info@rockwoodmfg.com

Copyright © 2011. Rockwood Manufacturing Company, an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Rockwood Manufacturing Company is prohibited.