




# CATALOG 2017/18





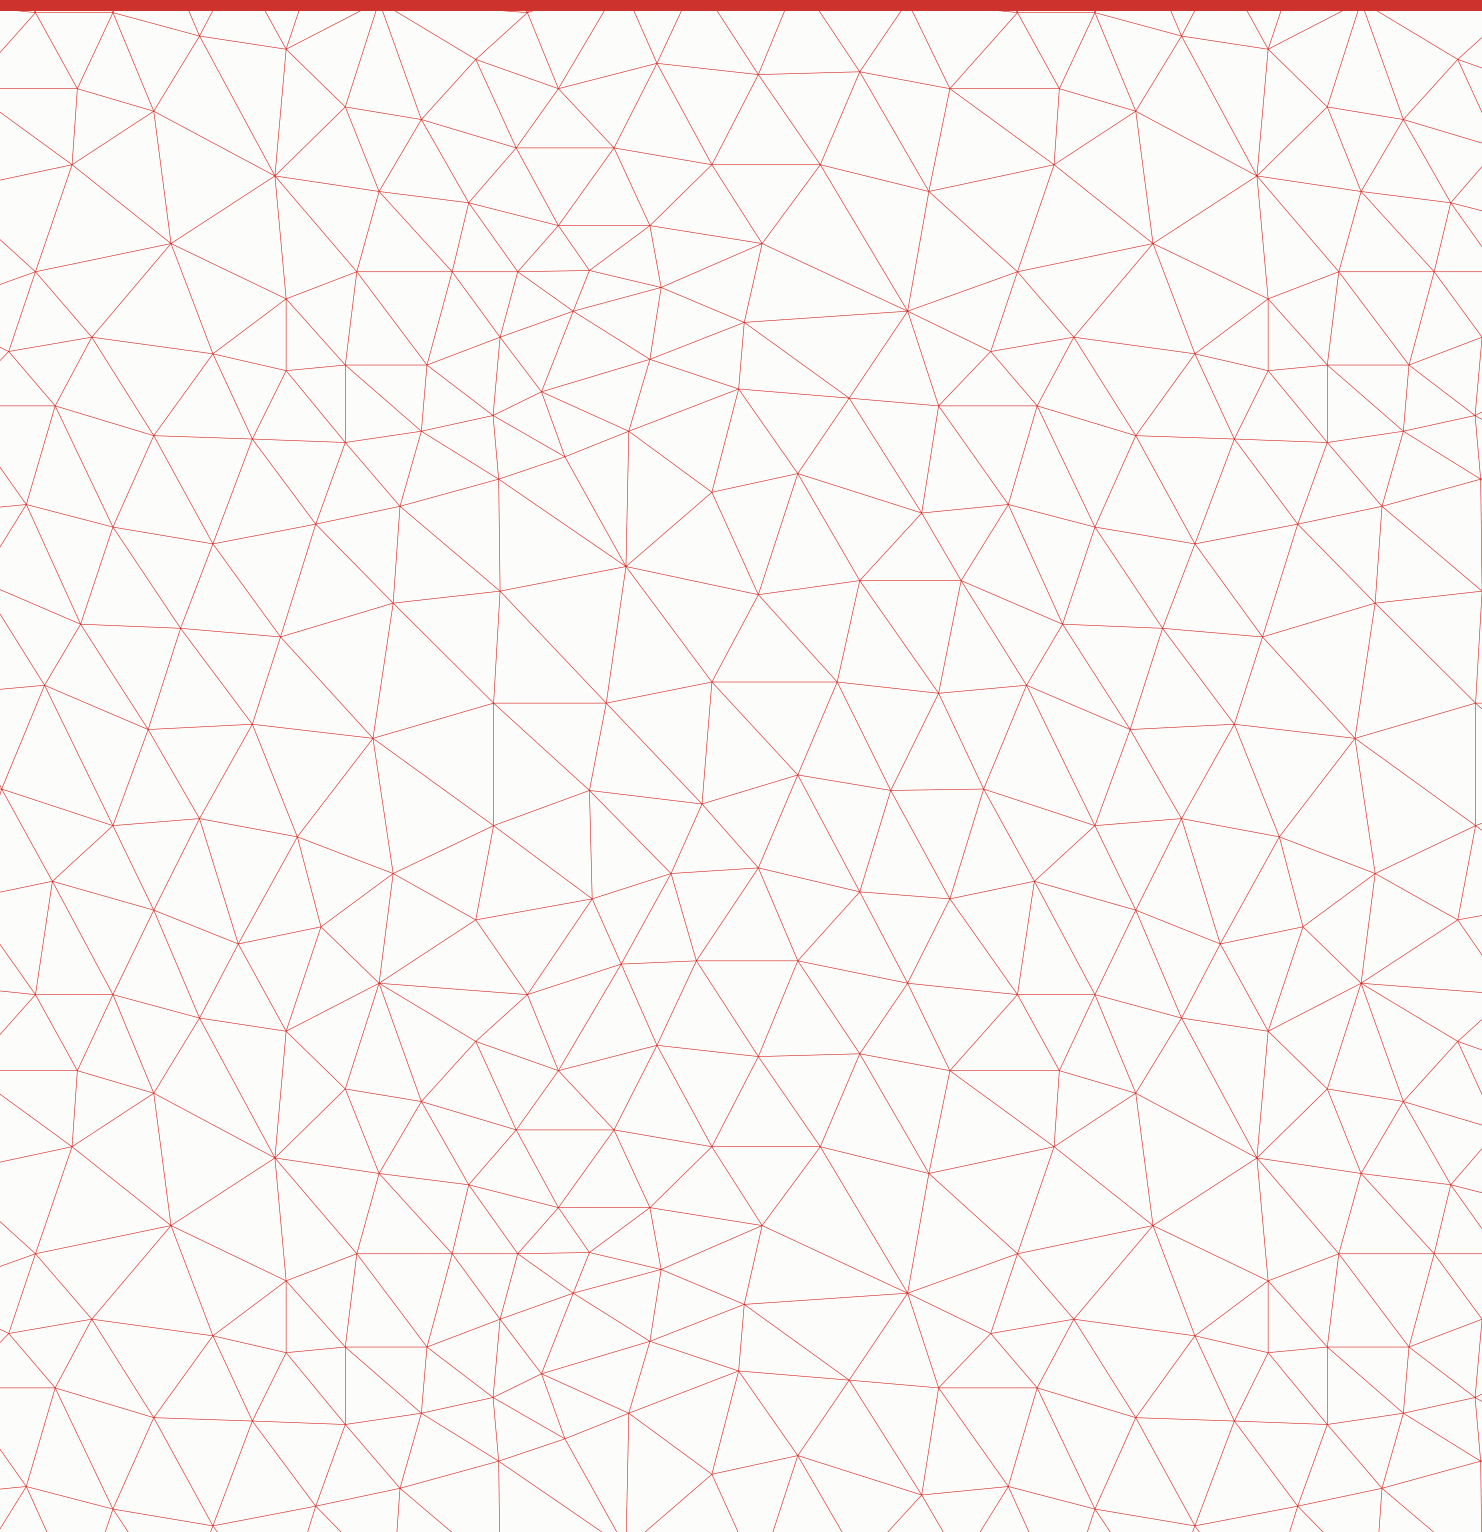

# TABLE OF CONTENTS

## ELECTROMAGNETS

|                              |    |
|------------------------------|----|
| 8000 SERIES .....            | 1  |
| 8100 SERIES .....            | 3  |
| 8400 SERIES .....            | 5  |
| 8500 SERIES .....            | 7  |
| 8600 SERIES .....            | 11 |
| 8700 SERIES .....            | 15 |
| 8900 SERIES .....            | 17 |
| ACCESSORIES .....            | 18 |
| GLASS DOOR ACCESSORIES ..... | 19 |

## ELECTRIC STRIKES

|                          |    |
|--------------------------|----|
| 1500 SERIES .....        | 20 |
| 1400 / 3400 SERIES ..... | 27 |
| SOLENOIDS .....          | 36 |
| 1700 SERIES .....        | 37 |
| 1106 SERIES .....        | 39 |
| 2400 SERIES .....        | 40 |

## EXIT DEVICES

|                          |    |
|--------------------------|----|
| 9200 - 9700 SERIES ..... | 46 |
| 9800 SERIES .....        | 51 |
| 9500 SERIES .....        | 52 |

## MISCELLANEOUS ACCESS CONTROL

|                                 |    |
|---------------------------------|----|
| MISC. ACCESS CONTROL .....      | 53 |
| CONVERTERS / TRANSFORMERS ..... | 55 |
| DOOR CORDS .....                | 57 |

## TERMS & CONDITIONS

#### SHEAR LOCK

## 8031-002

ROFU's 8031-002 Shear Lock features 2200 LB holding force for enhanced security and SPDT relay output for remote monitoring. It is suitable for dual swinging doors, glass doors, in semi-surface and fully surface installation.

8031-002 features monitoring and bond sensor functions.



#### STANDARD FEATURES

- Door position sensor: dry reed contact and adjustable magnet
- Maximum gap (between magnet and armature plate): 1/8" or 3 mm
- Relock delay: 1~6 seconds, 3 seconds is default
- Fail-safe: releases instantly when power is disconnected with no residual magnetism
- Fail alarm: may be released upon activation of fire alarm
- Magnet and armature plate finish: zinc  
Housing: black powder coating
- Designed for dual swinging doors, suitable for narrow frames and glass doors installation
- Can be installed horizontally or vertically


#### SPECIFICATION

|                      |                                                                                   |
|----------------------|-----------------------------------------------------------------------------------|
| <b>HOLDING FORCE</b> | 2200 LB                                                                           |
| <b>VOLTAGE</b>       | 12 to 24 VDC                                                                      |
| <b>CURRENT</b>       | Pull in: 1.85 A, Holding: 0.45 A/12 VDC<br>Pull in: 1.1 A, Holding: 0.25 A/24 VDC |
| <b>DIMENSIONS</b>    | Magnet: 10 1/2" x 1 3/8" x 1 5/16"<br>Armature: 10 1/2" x 1 3/8" x 1 5/16"        |

#### OPTIONAL BRACKETS

| MODELS                                                                                               | DESCRIPTION                  |
|------------------------------------------------------------------------------------------------------|------------------------------|
| <br><b>21059</b> | Surface Mount Housing (Each) |


#### APPLICATIONS



OUTSWING




INSWING




DOUBLESWING

Semi-Surface Installation



Surface Installation



## SHEAR LOCK

**8035 SERIES**

ROFU's 8035 Mini Shear Locks are fail-safe, 12/24 VDC selectable magnetic locks. The magnetic shear locks are compact solutions, designed for dual swinging interior doors and can be installed in horizontal or vertical position.


8035-002 features monitoring and bond sensor functions.




## STANDARD FEATURES

- Dual voltage 12/24 VDC field selectable
- Maximum gap (between magnet and armature plate) : 2 mm
- Fail-safe: releases instantly when power is disconnected
- Fail alarm: may be released upon activation of fire alarm
- Magnetic bond sensor output: SPDT rated: 0.5 A/ 125 VAC ; 1 A/ 24 VDC (on 8035-002 model only)
- Magnet and armature finish: zinc plating
- Designed for dual swinging doors, suitable for narrow frames and glass doors installation
- Can be installed horizontally or vertically
- No residual magnetism


## APPLICATIONS



OUTSWING



INSWING



DOUBLESWING

## SPECIFICATION

|                      |                                                                                     |
|----------------------|-------------------------------------------------------------------------------------|
| <b>HOLDING FORCE</b> | 1200 LB                                                                             |
| <b>VOLTAGE</b>       | 12/24 VDC                                                                           |
| <b>CURRENT</b>       | 420 mA/12 VDC , 210 mA/24 VDC                                                       |
| <b>DIMENSIONS</b>    | Magnet: 7 1/16" x 1 3/16" x 1 1/16"<br>Armature Plate: 7 1/16" x 1 3/16" x 1 11/16" |

## 8035 SERIES MODELS

| MODELS          | DESCRIPTION                |
|-----------------|----------------------------|
| <b>8035</b>     | Mini Shear Lock            |
| <b>8035-002</b> | Mini Shear Lock, Monitored |

## OPTIONAL BRACKETS

| MODELS                                                                                              | DESCRIPTION                         |
|-----------------------------------------------------------------------------------------------------|-------------------------------------|
| <br><b>21036</b> | Surface Mount Housing (Pair)        |
| <br><b>21037</b> | U-Bracket (Pair) for use with 21036 |
| <br><b>21054</b> | Tamperproof Housings (Pair)         |

## HANDLE MEGNETIC LOCKS


# 8106HD SERIES

The 8106HD Electromagnets feature a new design which encloses the armature plate in a door handle. Single and double magnets options are available, with a holding force of 600 LB per single magnet.

## STANDARD FEATURES

- Stylish hidden magnet design - safe and secure
- Dual voltage 12/24 VDC field selectable
- Durable, high quality aluminum anodized finish
- Fail-safe: releases instantly when power is disconnected. No residual magnetism
- No residual magnetism
- For inswing doors only
- Bond sensor (B): built-in hall effect sensors, detecting magnetic field strength from door position and voltage input

## APPLICATIONS

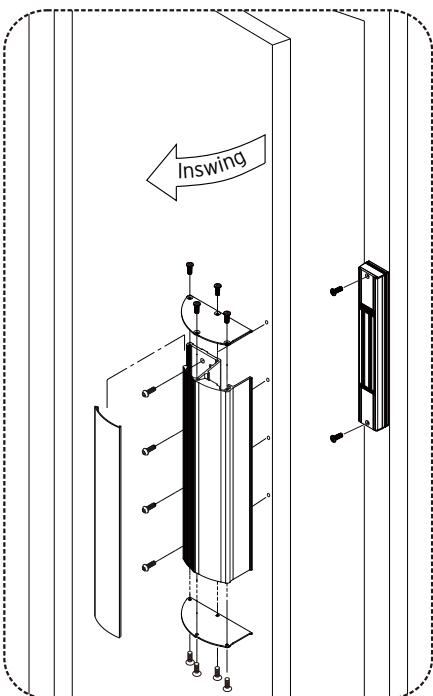

8106HD-B




8106HD-2-B



## SPECIFICATION

| MODELS        | 8106HD-B                                                                                                                                                                                     | 8106HD-2-B |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| HOLDING FORCE | 600 LB                                                                                                                                                                                       | 600 LB x2  |
| VOLTAGE       | 12/24 VDC                                                                                                                                                                                    |            |
| CURRENT       | 500 mA/12 VDC , 250 mA/24 VDC                                                                                                                                                                |            |
| DIMENSIONS    | <b>8106HD-B</b><br>Magnet: 12 3/4" x 11/8" x 17/8"<br>Armature: 13 1/8" x 2 3/16" x 4 7/8"<br><b>8106HD-2-B</b><br>Magnet: 97 13/16 x 11/8" x 17/8"<br>Armature: 98 9/16" x 2 3/16" x 4 7/8" |            |

## DIMENSION

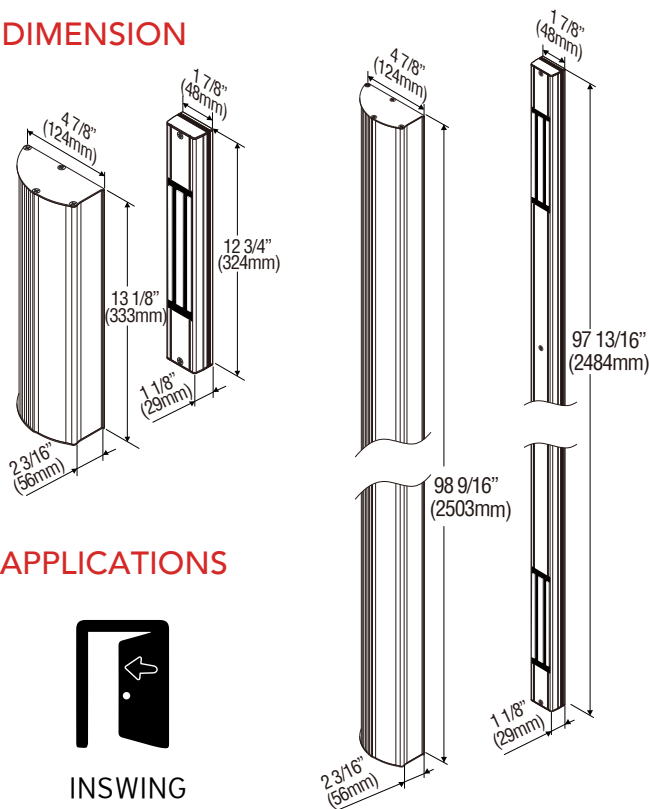

## APPLICATIONS



INSWING

FULL LENGTH MAGNETIC LOCKS

# 8112FF SERIES

8112FF Full Length Electromagnets are equipped with a base board and a security cover. Single magnet 8112FF-BD-RD is 45" in length for a horizontal configuration and the handings can easily be reversed. Double magnets 8112FF-2-BD-RD is 96" in length for a vertical configuration. Both models have a holding force of 1200 LB per single magnet.

## STANDARD FEATURES


- Fail-safe: releases instantly when power is disconnected. No residual magnetism
- Fail alarm: may be released upon activation of the fire alarm
- Housing: satin aluminum
- Bond sensor (B): built-in hall effect sensors, detecting magnetic field strength from door position and voltage input
- Door status (D) function works in conjunction with the bond sensor
- Relock time delay (RD): Timer can be adjusted to relock after 1~80 seconds
- LED: Bi-colored red/green



8112FF-2-BD-RD

8112FF-BD-RD

## APPLICATIONS




INSWING


## SPECIFICATION

| MODELS        | 8112FF-BD-RD                                                                                       | 8112FF-2-BD-RD |
|---------------|----------------------------------------------------------------------------------------------------|----------------|
| HOLDING FORCE | 1200 LB                                                                                            | 1200 LB x2     |
| VOLTAGE       | 12/24 VDC                                                                                          |                |
| CURRENT       | 500 mA/12 VDC , 250 mA/24 VDC                                                                      |                |
| DIMENSIONS    | <b>8112FF-BD-RD</b><br>45" x 1 9/16" x 3 5/16"<br><b>8112FF-2-BD-RD</b><br>96" x 1 9/16" x 3 5/16" |                |


## APPLICATIONS

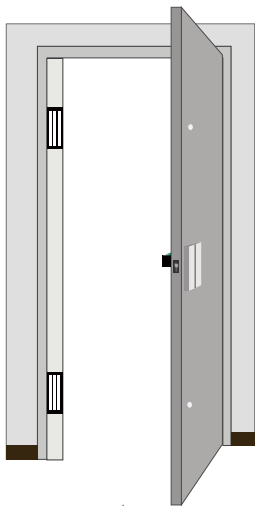

Single Door Vertical Configuration

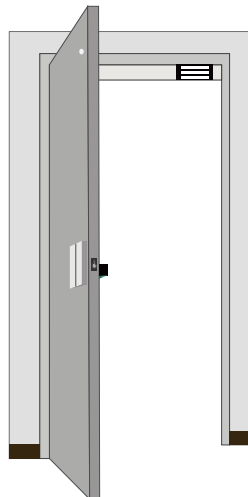

Single Door Horizontal Configuration  
(Right Hand Reverse)

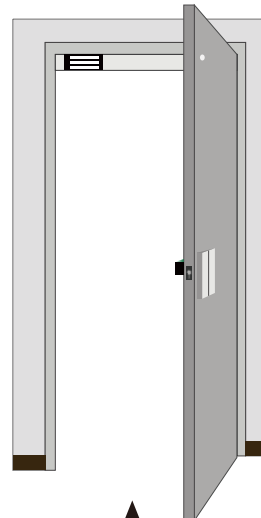

Single Door Horizontal Configuration  
(Left Hand Reverse)

ELECTROMAGNETS

ELECTRIC STRIKES

EXIT DEVICES

MISC. ACCESS CONTROL



## 8400 SERIES

### ELECTROMAGNETS

### ELECTRIC STRIKES

### EXIT DEVICES

### MISC. ACCESS CONTROL

#### ELECTROMAGNETS

## 8406M


8406M Mini Sliding Door Electromagnet is a compact mortise maglock made with steel housing and is a durable option for high frequency use.

8406M is ideal for securing sliding or swinging, manual or automatic doors.

#### STANDARD FEATURES

- Easy installation: versatile mounting brackets included for new and existing installation
- Magnet designed to mortise into the jamb
- Armature plate mortises into the edge of sliding door
- Fail-safe: releases instantly when power is disconnected
- Fail alarm: may be released upon activation of fire alarm
- No residual magnetism

#### APPLICATIONS

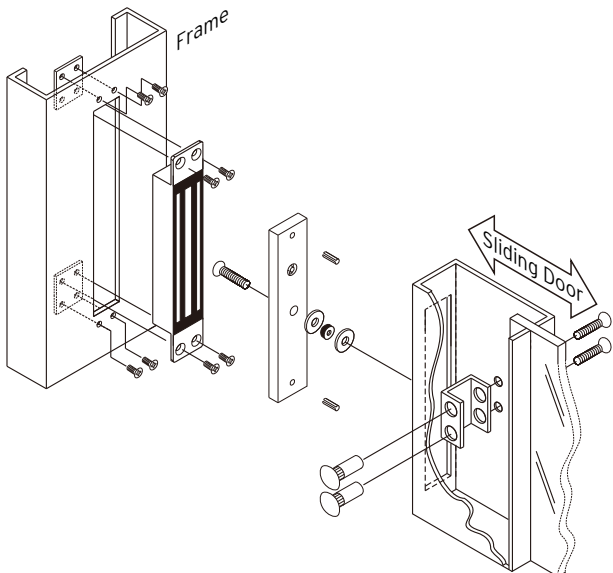

#### SPECIFICATION

|                      |                                                                                                     |
|----------------------|-----------------------------------------------------------------------------------------------------|
| <b>HOLDING FORCE</b> | 600 LB                                                                                              |
| <b>VOLTAGE</b>       | 12/24 VDC                                                                                           |
| <b>CURRENT</b>       | 500 mA/12 VDC , 250 mA/24 VDC                                                                       |
| <b>DIMENSIONS</b>    | Magnet: 7 1/2" x 1 1/2" x 1 1/8"<br>(9 1/16" x 1 1/2" x 1 1/8")<br>Armature: 7 1/4" x 1 1/2" x 1/2" |

#### OPTIONAL BRACKETS

| MODELS                                                                                               | DESCRIPTION                             |
|------------------------------------------------------------------------------------------------------|-----------------------------------------|
| <br><b>20925</b> | Armature Mounting Bracket for Wood Jamb |



## ELECTROMAGNETS

## 8403 SERIES



8403S-12



8403M-12



8403F-12

ROFU 8403 Micro Electromagnets are designed for compact applications such as small cabinets, drawers, lockers and safes.

8403M-12 is designed for mortise installation on sliding doors.


8403F-12 is for front or top mount installation.

8403S-12 is supplied with a mounting plate and is for standard surface mount installation.

## STANDARD FEATURES

- Fail-safe: releases instantly when power is disconnected
- No residual magnetism
- Weather resistant cable connection
- This model is not recommended for life safety or high security applications
- Housing: attractive, heavy duty nickel plated steel


## APPLICATIONS

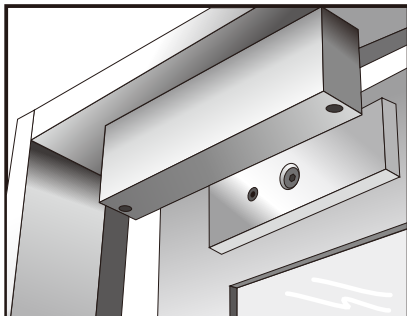

8403S-12



8403M-12

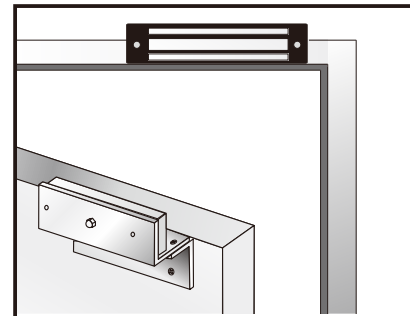

8403F-12

## SPECIFICATION

|                      |                                                                                                                                                                                                                                                                                                              |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>HOLDING FORCE</b> | 300 LB                                                                                                                                                                                                                                                                                                       |
| <b>VOLTAGE</b>       | 12 VDC                                                                                                                                                                                                                                                                                                       |
| <b>CURRENT</b>       | 300 mA/12 VDC                                                                                                                                                                                                                                                                                                |
| <b>DIMENSIONS</b>    | <p><b>8403S-12</b><br/>Magnet: 6 11/16" x 1 1/4" x 15/16"<br/>Armature Plate: 6" x 1 1/4" x 3/8"</p> <p><b>8403M-12</b><br/>Magnet: 7 7/8" x 1 1/4" x 15/16"<br/>Armature Plate: 6" x 1 1/4" x 3/8"</p> <p><b>8403F-12</b><br/>Magnet: 6 11/16" x 1 1/4" x 15/16"<br/>Armature Plate: 6" x 1 1/4" x 3/8"</p> |

## OPTIONAL BRACKETS

| MODELS                                                                                              | DESCRIPTION                 |
|-----------------------------------------------------------------------------------------------------|-----------------------------|
| <br><b>20918</b> | Mounting Plate for 8403S-12 |

### ELECTROMAGNETS

## 8500 SERIES

The 8500 Series Electromagnets replace 8011 Series while offering the same functionality.

All of the magnets in the range are 12/24 VDC selectable, fail-safe, suitable for indoor use, featuring anti-residual magnetism design and keyhole mounting for ease of installation.

### STANDARD FEATURES

- Easy installation with keyhole mounting "slides left to right"
- Mounting hardware included to mount the maglock and the armature plate for out-swinging door
- No residual magnetism
- Fail alarm: may be released upon activation of fire alarm
- Housing: attractive, heavy duty anodized extruded aluminum housing, no need for a cover
- Mounting hardware included with each unit, for out-swinging doors
- Optional brackets for in-swinging doors and special installations (see Accessories)
- Dual voltage 12/24 VDC field selectable
- Fail-safe: releases instantly when power is disconnected. No residual magnetism




### SPECIFICATION

|                      |                                                                                |
|----------------------|--------------------------------------------------------------------------------|
| <b>HOLDING FORCE</b> | 1200 LB                                                                        |
| <b>VOLTAGE</b>       | 12/24 VDC                                                                      |
| <b>CURRENT</b>       | 500 mA/12 VDC , 250 mA/24 VDC                                                  |
| <b>DIMENSIONS</b>    | Magnet: 10 1/2" x 1 9/16" x 2 11/16"<br>Armature Plate: 7 1/4" x 5/8" x 2 3/8" |


### 8500 SERIES MODELS

| MODELS               | DESCRIPTION                                          |
|----------------------|------------------------------------------------------|
| <b>8512-LC</b>       | Standard Single Magnet                               |
| <b>8512-LC US40</b>  | Standard Single Magnet (US40)                        |
| <b>8512-B</b>        | Standard Single Magnet, Bond Sensor                  |
| <b>8512-2-B</b>      | Standard Double Magnet, Bond Sensor                  |
| <b>8512-2-B-US40</b> | Standard Double Magnet, Bond Sensor (US40)           |
| <b>8512-20993</b>    | Oklahoma Special with Specifically Designed PC Board |
| <b>8512-DE</b>       | Standard Single Magnet, Delayed Egress               |

### ATTACHING MAGNET TO MOUNTING PLATE

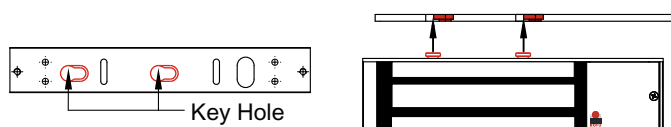

1. Align the two slotted holes and attach the magnet to the mounting plate.

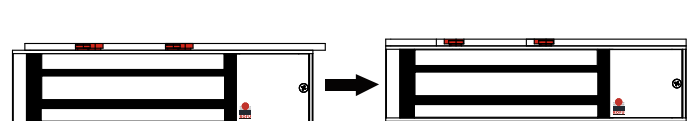

2. Slide the magnet onto the mounting plate.  
→ Keyhole Mounting "slides Left to Right"


## ELECTROMAGNETS

**8512 SERIES**


## STANDARD FEATURES

- Easy installation with keyhole mounting "slides left to right"
- Dual voltage 12/24 VDC field selectable
- Built-in MOV spike and surge protection
- No residual magnetism
- Fail alarm: may be released upon activation of fire alarm
- Housing: attractive, heavy duty anodized extruded aluminum housing


## APPLICATIONS



OUTSWING



INSWING



DOUBLE DOOR

**8512-LC****8512-LC US40**

## SPECIFICATION

| MODELS                                  | HOLDING FORCE | STANDARD FEATURE  | CURRENT DRAW                   | DIMENSIONS                                                                     |
|-----------------------------------------|---------------|-------------------|--------------------------------|--------------------------------------------------------------------------------|
| <b>8512-LC</b><br><b>8512-LC US40</b>   | 1200 LB       | Standard,<br>US40 | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 10 1/2" x 1 9/16" x 2 11/16"<br>Armature Plate: 7 1/4" x 5/8" x 2 3/8" |
| <b>8512-B</b>                           | 1200 LB       | Bond sensor       | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 10 1/2" x 1 9/16" x 2 11/16"<br>Armature Plate: 7 1/4" x 5/8" x 2 3/8" |
| <b>8512-2-B</b><br><b>8512-2-B US40</b> | 1200 LB x2    | Bond sensor       | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 21" x 1 9/16" x 2 11/16"<br>Armature Plate: 7 1/4" x 5/8" x 2 3/8" x2  |

## OPTIONAL BRACKETS

Optional brackets compatible with 8512 Models

| MODELS                            | DESCRIPTION                                    |
|-----------------------------------|------------------------------------------------|
| <b>21031</b><br><b>21031 US40</b> | Z-Brackets for 8512 Models<br>(Optional: US40) |
| <b>21033</b><br><b>21033 US40</b> | Z-Brackets for 8512-2-B<br>(Optional: US40)    |



Z-Bracket Sets  
**21031**

## ELECTROMAGNETS

**8512-20993****8512-20993 OKLAHOMA SPECIAL**

- Easy installation with keyhole mounting "slides left to right"
- Dual voltage 12/24 VDC field selectable
- Built-in MOV spike and surge protection
- No residual magnetism
- Specially designed terminal block to withstand electrical storms
- Housing: attractive, heavy duty anodized extruded aluminum housing

**Model 8512-20993**, this is known as an "Oklahoma Special"

A terminal block is specifically designed to ensure the magnet withstand the electrical storms that are common in the Oklahoma region. This magnet has become a standard install in most commercial buildings, casinos and facilities in the state of Oklahoma, not only for the ease of installation, but the wiring with the terminal block and the proven durability and reliability of this model to stand up to the harsh electrical storms in the area.



## SPECIFICATION

| MODELS            | HOLDING FORCE | STANDARD FEATURE | CURRENT DRAW                   | DIMENSIONS                                                                     |
|-------------------|---------------|------------------|--------------------------------|--------------------------------------------------------------------------------|
| <b>8512-20993</b> | 1200 LB       | Standard         | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 10 1/2" x 1 9/16" x 2 11/16"<br>Armature Plate: 7 1/4" x 5/8" x 2 3/8" |

## OPTIONAL ACCESSORIES &amp; BRACKETS

Optional brackets & accessories compatible with 8512 Series Electromagnets.


| MODELS       | DESCRIPTION                                                                                                                    | MODELS                            | DESCRIPTION                                                                                |
|--------------|--------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|--------------------------------------------------------------------------------------------|
| <b>20930</b> | 1/4" Spacer / Replacement Mounting Plate<br>(For 8512 Models)<br>20931 for US40 Finish<br>20936 Stainless Steel Mounting Plate | <b>20932</b>                      | 1/4" Spacer / Replacement Mounting Plate<br>(For 8512-2-B Models)<br>20933 for US40 Finish |
| <b>20931</b> |                                                                                                                                | <b>20933</b>                      |                                                                                            |
| <b>20936</b> |                                                                                                                                |                                   |                                                                                            |
| <b>20934</b> | 1/2" Spacer<br>(For 8512 Models)                                                                                               | <b>21031</b><br><b>21031 US40</b> | Z-Brackets for 8512 Models<br>(Optional: US40)                                             |
|              |                                                                                                                                | <b>21033</b><br><b>21033 US40</b> | Z-Brackets for 8512-2-B<br>(Optional: US40)                                                |
| <b>20915</b> | Split Armature Plate (Pair)                                                                                                    |                                   |                                                                                            |

## ELECTROMAGNETS


**8512-DE**

## STANDARD FEATURES


- Easy installation with keyhole mounting "slides left to right"
- Dual voltage 12/24 VDC field selectable
- Selectable delayed egress cycles: 15 or 30 seconds
- Selectable nuisance delay egress: 0~3 seconds
- Fail alarm: may be released upon activation of fire alarm
- Bond sensor feature for remote monitoring
- Optional remote alarm
- Fail-safe: releases instantly when power is disconnected. No residual magnetism

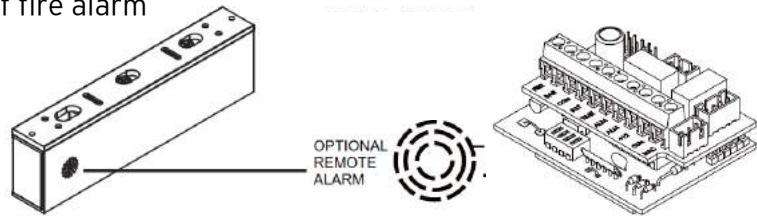

## APPLICATIONS



OUTSWING



INSWING

## SPECIFICATION

| MODELS         | HOLDING FORCE | STANDARD FEATURE | CURRENT DRAW                   | DIMENSIONS                                                                     |
|----------------|---------------|------------------|--------------------------------|--------------------------------------------------------------------------------|
| <b>8512-DE</b> | 1200 LB       | Delay Degress    | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 10 1/2" x 1 9/16" x 2 11/16"<br>Armature Plate: 7 1/4" x 5/8" x 2 3/8" |

## RECOMMENDED ACCESSORIES

| MODELS               | DESCRIPTION           | MODELS              | DESCRIPTION                          |
|----------------------|-----------------------|---------------------|--------------------------------------|
| <b>9500X36</b>       | Micro-Switch Bar US28 | <b>10318</b>        | 16" Door Cord, 5/16" Inside diameter |
| <b>SIGN-DE 15SEC</b> | Delayed Egress Sign   | <b>10320HD US28</b> | Heavy Duty Stainless Steel Door Cord |



### ELECTROMAGNETS

## 8600 SERIES

The 8600 Series Electromagnets feature a patented design for a safer installation and are UL listed, fire rated for up to 3/4 hours and are suitable for swinging type fire doors.

All in the range are 12/24 VDC selectable, fail-safe, suitable for indoor use with anti-residual magnetism design. The range also offers optional bond sensor and door status features.

### STANDARD FEATURES

- Slide-in mounting plate design for easy and secure installation
- Dual voltage 12/24 VDC field selectable
- Built-in MOV spike and surge protection
- No residual magnetism
- Fail-safe: releases instantly when power is disconnected. No residual magnetism
- Aluminum alloy casing
- UL Listed for auxiliary locks under file GWXT.R16728


### OPTIONAL Z-BRACKETS

- Optional brackets for in-swinging doors and special installations (see Accessories)



Z-Bracket Sets  
(21030N, 21031N & 21038N)

### SPECIAL MOUNTING PLATE DESIGN

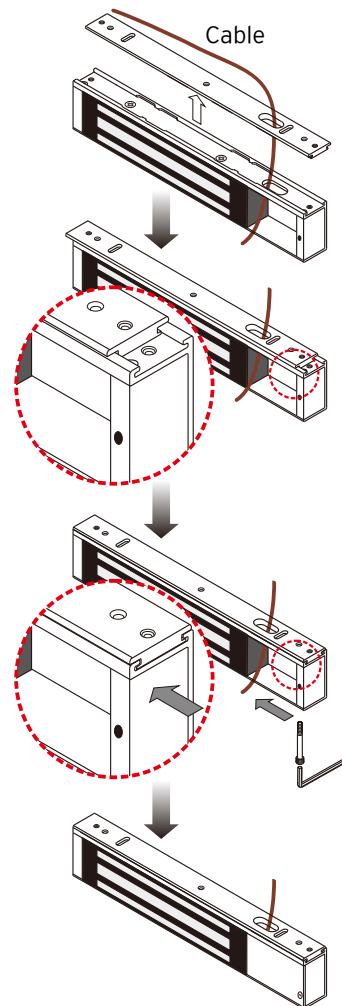



Pass the power cable through the mounting plate and the hole of the maglock.

Place the mounting plate above the maglock. Leave a length of 1 cm from either end of the maglock.

Slide the mounting plate into the maglocks. Fit the maglock from the bottom to the mounting plate.

Use the Allen wrench and fixing screws to tighten the mounting plate and maglock.

### Installation of Z-Brackets

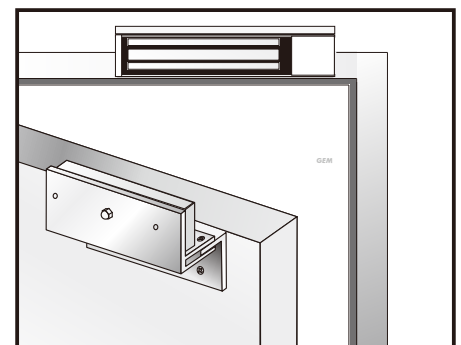

## ELECTROMAGNETS


**8606 SERIES**

## STANDARD FEATURES


- Slide-in mounting plate design for easy and secure installation
- Dual voltage 12/24 VDC field selectable
- Built-in MOV spike and surge protection
- No residual magnetism
- Aluminum alloy casing
- Bond sensor & door status monitoring
- UL Listed for auxiliary locks under file GWXT.R16728

**8606-BD****8606-2-BD**


## APPLICATIONS



OUTSWING



INSWING



DOUBLE DOOR

## SPECIFICATION

| MODELS                | HOLDING FORCE | STANDARD FEATURE          | CURRENT DRAW                   | DIMENSIONS                                                                     |
|-----------------------|---------------|---------------------------|--------------------------------|--------------------------------------------------------------------------------|
| <b>8606-BD</b>        | 600 LB        | Bond sensor & Door status | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 9 13/16" x 1" x 1 13/16"<br>Armature Plate: 7 1/4" x 1/2" x 1 1/2"     |
| <b>8606-BD US40</b>   | 600 LB        | Bond sensor & Door status | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 9 13/16" x 1" x 1 13/16"<br>Armature Plate: 7 1/4" x 1/2" x 1 1/2"     |
| <b>8606-2-BD</b>      | 600 LB x2     | Bond sensor & Door status | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 19 11/16" x 1" x 1 13/16"<br>Armature Plate: 7 1/4" x 1/2" x 1 1/2" x2 |
| <b>8606-2-BD US40</b> | 600 LB x2     | Bond sensor & Door status | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 19 11/16" x 1" x 1 13/16"<br>Armature Plate: 7 1/4" x 1/2" x 1 1/2" x2 |

## OPTIONAL BRACKETS

Optional brackets & accessories compatible with 8606 Series Electromagnets

| MODELS                                                                                             | DESCRIPTION                  | MODELS        | DESCRIPTION                   |
|----------------------------------------------------------------------------------------------------|------------------------------|---------------|-------------------------------|
| <br><b>20921</b> | 1/2" Spacer<br>(For 8606-BD) | <b>21030N</b> | Z-Brackets<br>(For 8606-BD)   |
|                                                                                                    |                              | <b>21032N</b> | Z-Brackets<br>(For 8606-2-BD) |



## ELECTROMAGNETS


**8608 SERIES**

## STANDARD FEATURES


- Slide-in mounting plate design for easy and secure installation
- Dual voltage 12/24 VDC field selectable
- Built-in MOV spike and surge protection
- No residual magnetism
- Aluminum alloy casing
- Bond sensor output for remote monitoring
- UL Listed for auxiliary locks under file GWXT.R16728

**8608-BD****8608-2**


## APPLICATIONS



OUTSWING



INSWING



DOUBLE DOOR

## SPECIFICATION

| MODELS        | HOLDING FORCE | OPTIONAL FEATURES | CURRENT DRAW                   | DIMENSIONS                                                                       |
|---------------|---------------|-------------------|--------------------------------|----------------------------------------------------------------------------------|
| <b>8608</b>   | 800 LB        | BD                | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 10 7/16" x 1 1/8" x 2 1/16"<br>Armature Plate: 7 1/4" x 9/16" x 1 3/4"   |
| <b>8608-2</b> | 800 LB x2     | B, BD             | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 20 7/8" x 1 1/8" x 2 1/16"<br>Armature Plate: 7 1/4" x 9/16" x 1 3/4" x2 |

**NOTES:**

B: Bond Sensor; BD: Bond Sensor &amp; Door Status

## OPTIONAL BRACKETS

Optional brackets &amp; accessories compatible with 8608 Series Electromagnets

| MODELS        | DESCRIPTION                 |
|---------------|-----------------------------|
| <b>21038N</b> | Z-Brackets<br>(For 8608-BD) |


## ELECTROMAGNETS

**8612 SERIES**

## STANDARD FEATURES

- Slide-in mounting plate design for easy and secure installation
- Dual voltage 12/24 VDC field selectable
- Built-in MOV spike and surge protection
- No residual magnetism
- Aluminum alloy casing
- UL Listed for auxiliary locks under file GWXT.R16728


## APPLICATIONS



OUTSWING



INSWING



DOUBLE DOOR



8612



8612-2

## SPECIFICATION

| MODELS           | HOLDING FORCE | OPTIONAL FEATURES | CURRENT DRAW                   | DIMENSIONS                                                                     |
|------------------|---------------|-------------------|--------------------------------|--------------------------------------------------------------------------------|
| <b>8612</b>      | 1200 LB       | LC, LC US40       | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 10 1/2" x 1 9/16" x 2 13/16"<br>Armature Plate: 7 1/4" x 5/8" x 2 3/8" |
| <b>8612-B</b>    | 1200 LB       | B                 | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 10 1/2" x 1 9/16" x 2 13/16"<br>Armature Plate: 7 1/4" x 5/8" x 2 3/8" |
| <b>8612-BD</b>   | 1200 LB       | BD, BD US40       | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 10 1/2" x 1 9/16" x 2 13/16"<br>Armature Plate: 7 1/4" x 5/8" x 2 3/8" |
| <b>8612-2-B</b>  | 1200 LB x2    | B                 | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 21" x 1 9/16" x 2 13/16"<br>Armature Plate: 7 1/4" x 5/8" x 2 3/8" x2  |
| <b>8612-2-BD</b> | 1200 LB x2    | BD, BD US40       | 500 mA/12 VDC<br>250 mA/24 VDC | Magnet: 21" x 1 9/16" x 2 13/16"<br>Armature Plate: 7 1/4" x 5/8" x 2 3/8" x2  |

## NOTES:

LC: Standard Single Magnet; B: Bond Sensor; BD: Bond Sensor & Door Status

## OPTIONAL BRACKETS

Optional brackets & accessories compatible with 8612 Series Electromagnets.

| MODELS       | DESCRIPTION                                  | MODELS                              | DESCRIPTION                     |
|--------------|----------------------------------------------|-------------------------------------|---------------------------------|
| <b>20915</b> | Split Armature Plate (Pair)<br>(For 8612-LC) | <b>21031N</b><br><b>21031N US40</b> | Z-Brackets<br>(For 8612 Models) |
| <b>20934</b> | 1/2" Spacer<br>(For 8612 Models)             | <b>21033N</b><br><b>21033N US40</b> | Z-Brackets<br>(For 8612-2-B/BD) |

## 8700 SERIES

## ELECTROMAGNETS

## ELECTRIC STRIKES

## EXIT DEVICES

## MISC. ACCESS CONTROL

## ELECTROMAGNETIC GATE LOCKS

## 8706FT Models

8700 Series Gate Locks with Conduit Fitting (formerly known as 8040 Models) are fail-safe with dual-mounting functions. The gate locks are suitable for indoor and outdoor applications. 8706FT is a standard model while 8706FT-B features remote monitoring function.

Optional L-brackets are available for sliding gates and outswing doors installations.


## STANDARD FEATURES

- Weatherproof, stainless steel housing, suitable for indoor and outdoor application
- Both face and surface mount, suitable for a range of sliding and swinging electric gates.
- Dual voltage 12/24 VDC selectable
- Dual-threaded conduit fitting
- Fail-safe: releases instantly when power is disconnected, no residual magnetism
- Conforms in accordance with Standard UL 10B, UL 10C, listed under file GWXT.R16728
- Fire rating: up to and including 1-1/2 hours
- Built-in MOV spike and surge protection

## OPTIONAL BRACKETS

| MODELS                                                                              |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |
| <b>21034F</b>                                                                       | <b>21034S</b>                                                                       |


## APPLICATIONS



OUTSWING



INSWING



SLIDING




## SPECIFICATION

|                      |                                                                      |
|----------------------|----------------------------------------------------------------------|
| <b>HOLDING FORCE</b> | 600 LB                                                               |
| <b>VOLTAGE</b>       | 12/24 VDC                                                            |
| <b>CURRENT</b>       | 500 mA/12 VDC<br>250 mA/24 VDC                                       |
| <b>DIMENSIONS</b>    | Magnet: 8" x 1 11/16" x 1 9/16"<br>Armature: 7 1/4" x 1 3/4" x 9/16" |

## 8706 SERIES MODELS

| MODELS          |                                          |
|-----------------|------------------------------------------|
| <b>8706FT</b>   | Standard 600 LB Gate Magnetic Lock       |
| <b>8706FT-B</b> | Monitored 600 LB Gate Magnetic Lock      |
| <b>21034F</b>   | L-Brackets for Front Mount Installation  |
| <b>21034S</b>   | L-Bracket for Surface Mount Installation |

## SLIDING GATE INSTALLATION

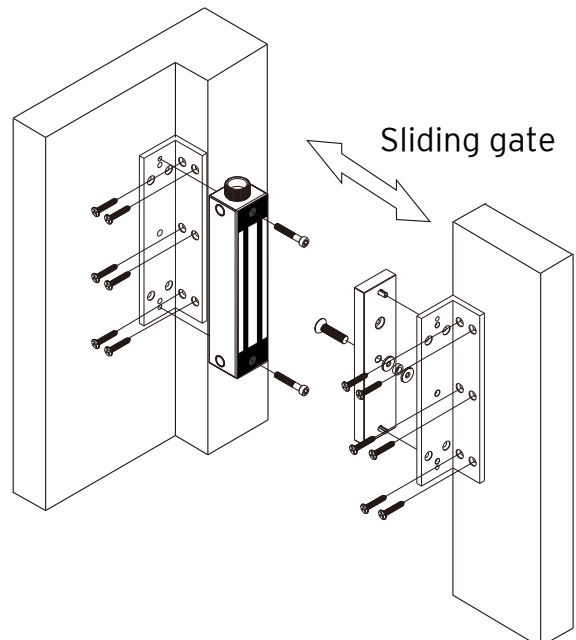

## ELECTROMAGNETIC GATE LOCKS

**8712FT Models**

8700 Series Gate Locks with Conduit Fitting (formerly known as 8040 Models) are fail-safe with dual-mounting functions. The gate locks are suitable for indoor and outdoor applications. 8712FT is a standard model while 8712FT-B features remote monitoring function.

Optional L-brackets are available for sliding gate and outswing doors installations.

## STANDARD FEATURES


- Weatherproof, stainless steel housing, suitable for indoor and outdoor application
- Both face and surface mount, suitable for a range of sliding and swinging electric gates.
- Dual voltage 12/24 VDC selectable
- Dual-threaded conduit fitting
- Fail-safe: releases instantly when power is disconnected, no residual magnetism
- Conforms in accordance with Standard UL 10B, UL 10C, listed under file GWXT.R16728
- Fire rating: up to and including 1-1/2 hours
- Built-in MOV spike and surge protection

## OPTIONAL BRACKETS

## MODELS




## APPLICATIONS



OUTSWING



INSWING



SLIDING




## SPECIFICATION

|                      |                                                                          |
|----------------------|--------------------------------------------------------------------------|
| <b>HOLDING FORCE</b> | 1200 LB                                                                  |
| <b>VOLTAGE</b>       | 12/24 VDC                                                                |
| <b>CURRENT</b>       | 500 mA/12 VDC<br>250 mA/24 VDC                                           |
| <b>DIMENSIONS</b>    | Magnet: 8 11/16" x 2 7/16" x 1 9/16"<br>Armature: 7 1/4" x 2 3/8" x 5/8" |

## 8712 SERIES MODELS

| MODELS          | DESCRIPTION                          |
|-----------------|--------------------------------------|
| <b>8712FT</b>   | Standard 1200 LB Gate Magnetic Lock  |
| <b>8712FT-B</b> | Monitored 1200 LB Gate Magnetic Lock |
| <b>21035FS</b>  | L-Brackets for Front & Surface Mount |

## SLIDING GATE INSTALLATION

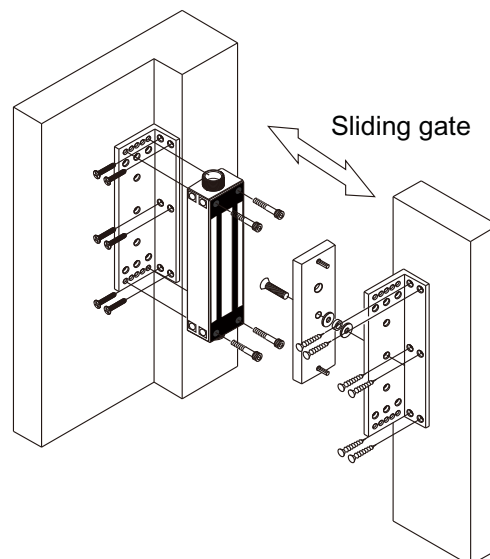

### MAGNETIC DOOR HOLDERS

## 8900 SERIES

FOR USE ON SELF-CLOSING FIRE AND/OR SMOKE BARRIER DOORS



**8900**  
Flush Mount  
Stainless Steel Plate



**8910**  
Wall Mount  
Stainless Steel Box



**8920**  
Floor Mount  
Cast Iron Housing  
with Reset Button

### STANDARD FEATURES

- Fail-safe: releases instantly when power is disconnected. No residual magnetism
- Available in 12 VAC/VDC or 24 VAC/VDC
- Holding force: 80 LB
- Fail alarm: will release upon activation of fire alarm
- Current draw: 120 mA at 12 VDC  
60 mA at 24 VDC
- Adjustable swivel armature for ease of alignment
- Limited warranty: 36 Months


### SPECIFICATIONS / OPTIONS

- Specify Voltage: 12 VAC/VDC or 24 VAC/VDC
- Optional 3 spacers for armature plate, 1/2" thick each (**8999**)

### OPTIONAL ACCESSORIES

| MODELS              | DESCRIPTION                                                    |
|---------------------|----------------------------------------------------------------|
| <p><b>8999</b></p>  | Spacer Kit<br>3 Spacers for Armature Plate,<br>1/2" Thick Each |
| <p><b>20916</b></p> | Replacement Armature Plate/<br>Oversized Swivel                |

### SPECIFICATION DETAILS

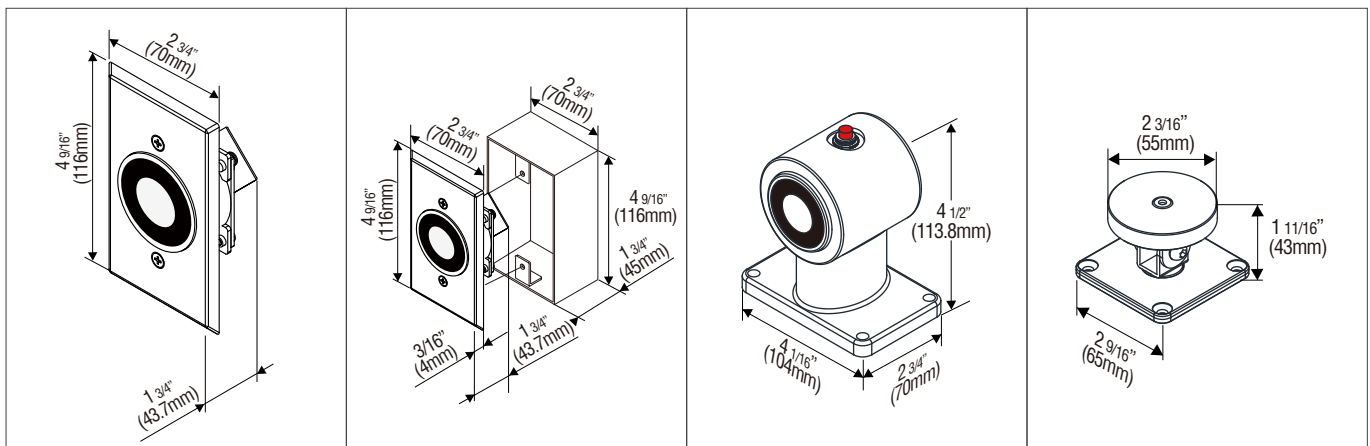




# FILLER PLATES

## SPECIFICATION

| MODELS    | 21000            | 21001 | 21004       | 21004 |
|-----------|------------------|-------|-------------|-------|
| DIMENSION | 1/2" x 3/4"      |       | 5/8" x 3/4" |       |
| FINISH    | US40             | US28  | US40        | US28  |
| FOR MODEL | 8512/8612 MODELS |       |             |       |



21000 &amp; 21001





# ANGLE BRACKETS

## SPECIFICATION

| MODELS    | 21020               | 21021 |
|-----------|---------------------|-------|
| DIMENSION | 1" x 1 1/2" x 5/16" |       |
| FINISH    | US40                | US28  |
| FOR MODEL | 8512/8612 MODELS    |       |



21020 &amp; 21021

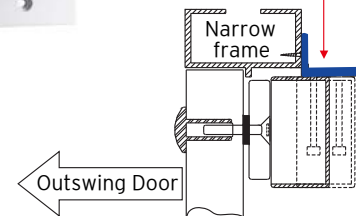

# ARMATURE PLATES & HOUSINGS


| MODELS               | DESCRIPTION                                               |
|----------------------|-----------------------------------------------------------|
| 20915                | Split Armature Plate Kit (Pair) (For 8512/8612 (LC Only)) |
| 21050                | Armature Mounting Bracket (For 8512/8612 Models)          |
| 21070 & 21071 (US40) | Armature Housing (For 8606-BD)                            |
| 21080 & 21081 (US40) | Armature Housing (For 8512/8612 (LC Only))                |




20915



21050




21070 &amp; 21080

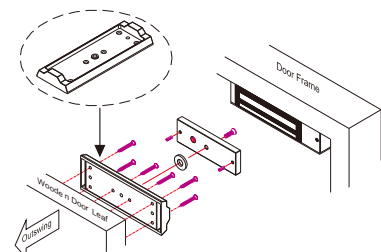




## Brackets for Glass Doors

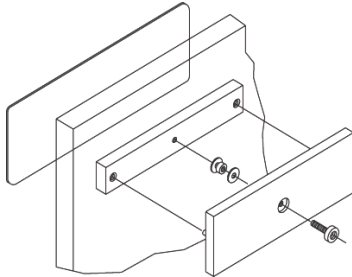

- Mounting bracket 1" x 7" x 1/2"
- Aluminum plate 8 5/8" x 3 3/8" x 1/8"
- Hardware pack

| MODELS       | DESCRIPTION                                            |
|--------------|--------------------------------------------------------|
| <b>21055</b> | Armature Mounting Bracket (For 8606/8512/8612)         |
| <b>21056</b> | Armature Mounting Bracket in US40 (For 8606/8512/8612) |


## Housings for Glass Doors



- Aluminium mounting bracket
- Aluminum plate 8 5/8" x 3 3/8" x 1/8"
- Hardware pack

| MODELS       | DESCRIPTION                              |
|--------------|------------------------------------------|
| <b>21047</b> | Armature Housing (For 8606-BD)           |
| <b>21048</b> | Armature Housing in US40 (For 8606-BD)   |
| <b>21057</b> | Armature Housing (For 8512/8612)         |
| <b>21058</b> | Armature Housing in US40 (For 8512/8612) |

## Brackets for Full Frame Glass Doors

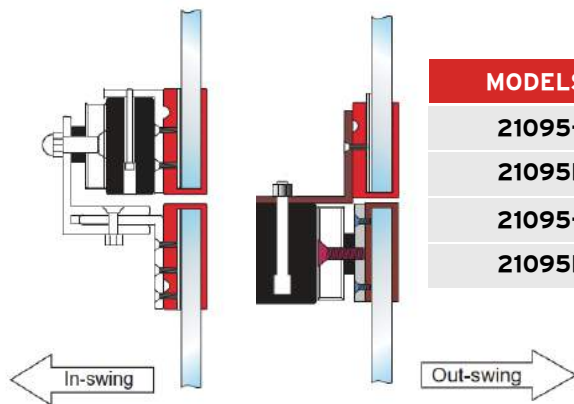

| MODELS            | DESCRIPTION                             |
|-------------------|-----------------------------------------|
| <b>21095-In</b>   | 2 U-Bracket & Z-Bracket (For 8005 US40) |
| <b>21095N-In</b>  | 2 U-Bracket & Z-Bracket (For 8606-BD)   |
| <b>21095-Out</b>  | 2 U-Bracket & L-Bracket (For 8005 US40) |
| <b>21095N-Out</b> | 2 U-Bracket & L-Bracket (For 8606-BD)   |

## Other Glass Doors Accessories



| MODELS       | DESCRIPTION                                         |
|--------------|-----------------------------------------------------|
| <b>21076</b> | U-Bracket for Armature Plate (For 8606-BD)          |
| <b>21077</b> | U-Bracket for Armature Plate (For 8512/8612 Models) |
| <b>21990</b> | Glue Kit for Glass Door Installation                |

# MODEL 1501


## STANDARD FEATURES

- Fail-secure, faceplate size 5 7/8" x 1 1/4"
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4"
- Steel faceplate, suitable for wood frames
- Separate spacers, solenoid mounts to faceplate from front
- Limited warranty - 12 months

## SPECIFICATION

|                        |                                                                      |
|------------------------|----------------------------------------------------------------------|
| <b>TAMPER STRENGTH</b> | 1000 LB (454 KG)                                                     |
| <b>VOLTAGE</b>         | 1501-01 8-16 VAC/3-6 VDC<br>1501-05 12 VAC/VDC<br>1501-08 24 VAC/VDC |
| <b>FINISH</b>          | US26D or US4                                                         |

## SPECIFICATION DETAILS

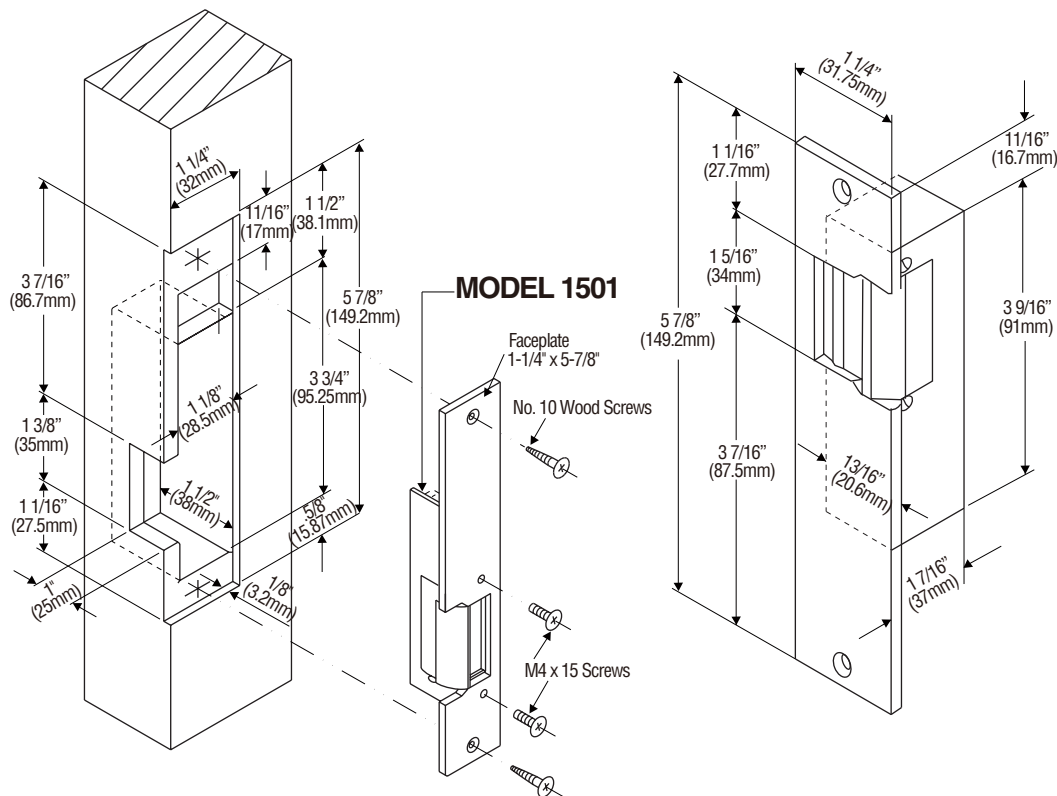

ELECTROMAGNETS

ELECTRIC STRIKES

EXIT DEVICES

MISC. ACCESS CONTROL



# MODEL 1505


## STANDARD FEATURES

- Fail-secure, faceplate size 5 7/8" x 1 1/4"
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4"
- Steel faceplate, suitable for wood frames
- Integrated spacers, solenoid mounts to faceplate from side
- Limited warranty - 12 months

## SPECIFICATION

|                        |                                                                      |
|------------------------|----------------------------------------------------------------------|
| <b>TAMPER STRENGTH</b> | 1000 LB (454 KG)                                                     |
| <b>VOLTAGE</b>         | 1505-01 8-16 VAC/3-6 VDC<br>1505-05 12 VAC/VDC<br>1505-08 24 VAC/VDC |
| <b>FINISH</b>          | US28 or US4                                                          |

## SPECIFICATION DETAILS

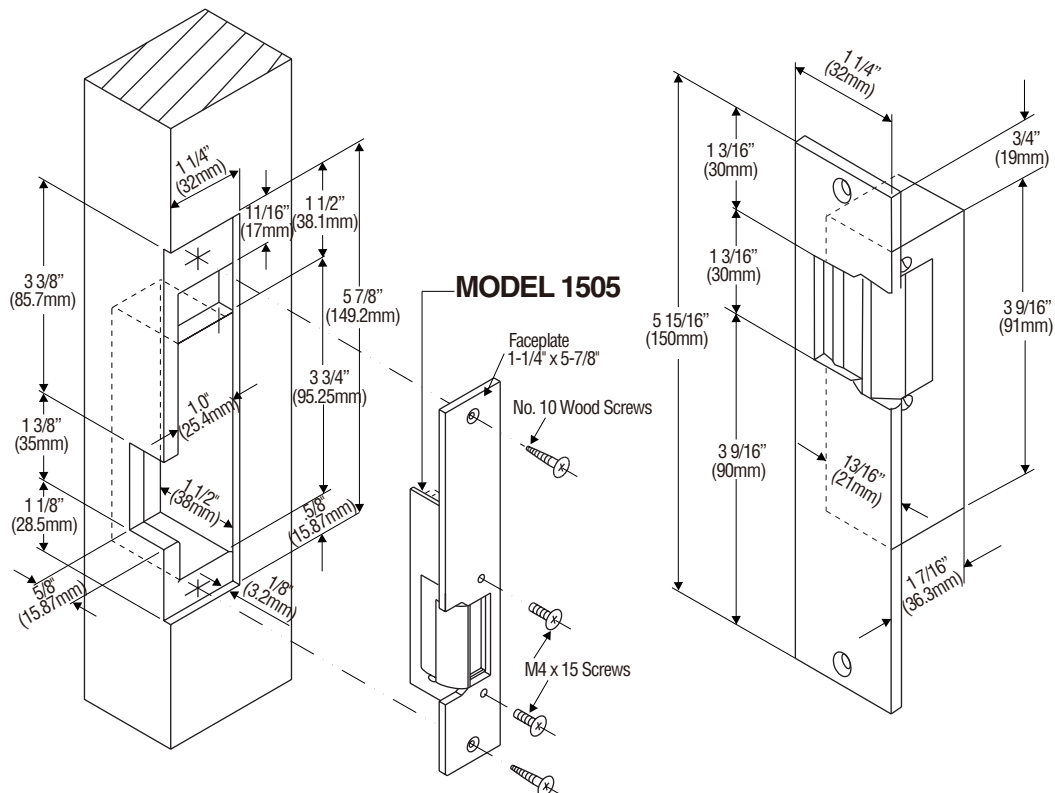

# 1507

## STANDARD FEATURES


- Fail-secure, faceplate size 2 3/4" x 1 1/4"
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4"
- Zinc/Aluminum alloy faceplate, suitable for hollow metal and aluminum frames
- Reversible - non-handed
- Limited warranty - 12 months

## SPECIFICATION

|                        |                                                                      |
|------------------------|----------------------------------------------------------------------|
| <b>TAMPER STRENGTH</b> | 1000 LB (454 KG)                                                     |
| <b>VOLTAGE</b>         | 1507-01 8-16 VAC/3-6 VDC<br>1507-05 12 VAC/VDC<br>1507-08 24 VAC/VDC |
| <b>FINISH</b>          | US26D or US4                                                         |



## SPECIFICATION DETAILS

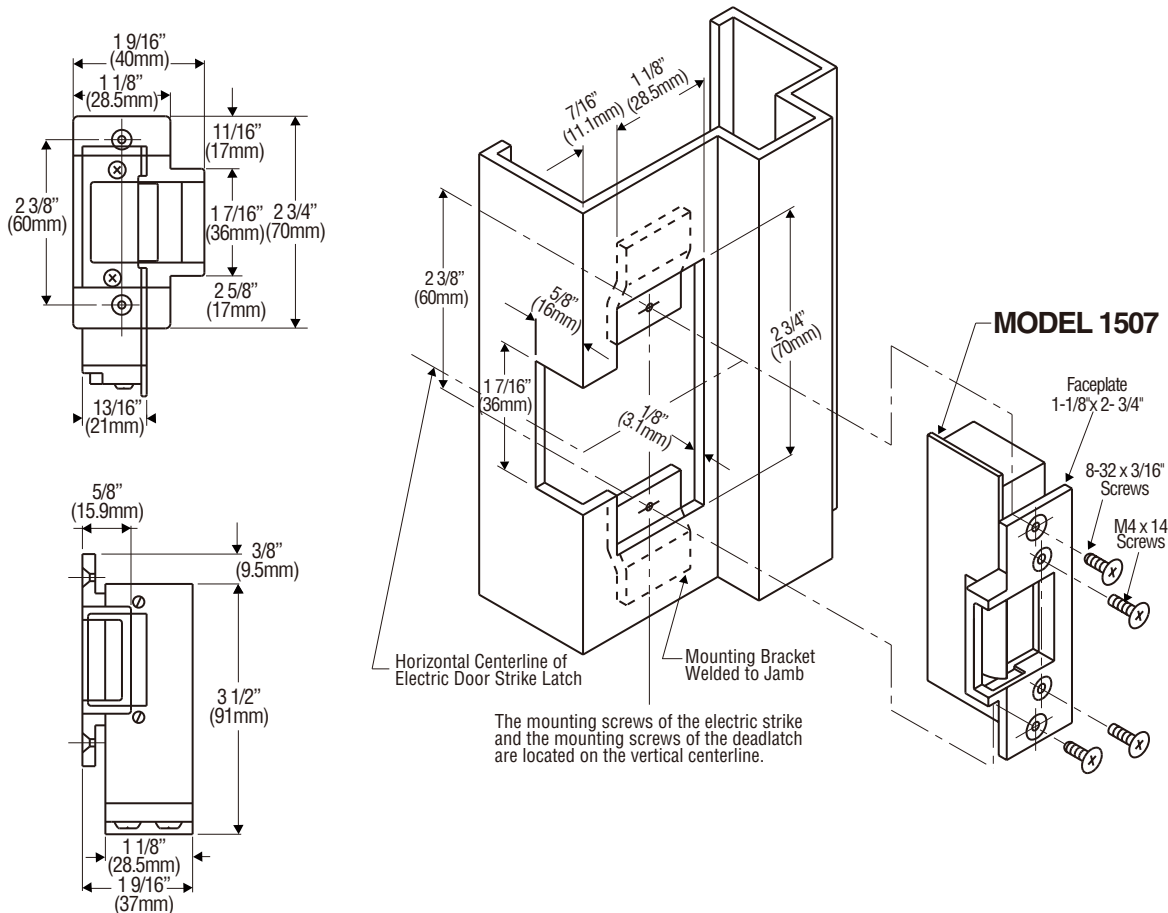



# 1508


## STANDARD FEATURES

- Fail-secure, faceplate size 5 7/8" x 11/8"
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4"
- Zinc/Aluminum alloy faceplate, suitable for hollow metal, aluminum or wood frames
- Reversible - non-handed
- Limited warranty - 12 months

## SPECIFICATION

|                        |                                                                     |
|------------------------|---------------------------------------------------------------------|
| <b>TAMPER STRENGTH</b> | 1000 LB (454 KG)                                                    |
| <b>VOLTAGE</b>         | 1508-01 8-16 VAC/3-6VDC<br>1508-05 12 VAC/VDC<br>1508-08 24 VAC/VDC |
| <b>FINISH</b>          | US28                                                                |

## SPECIFICATION DETAILS

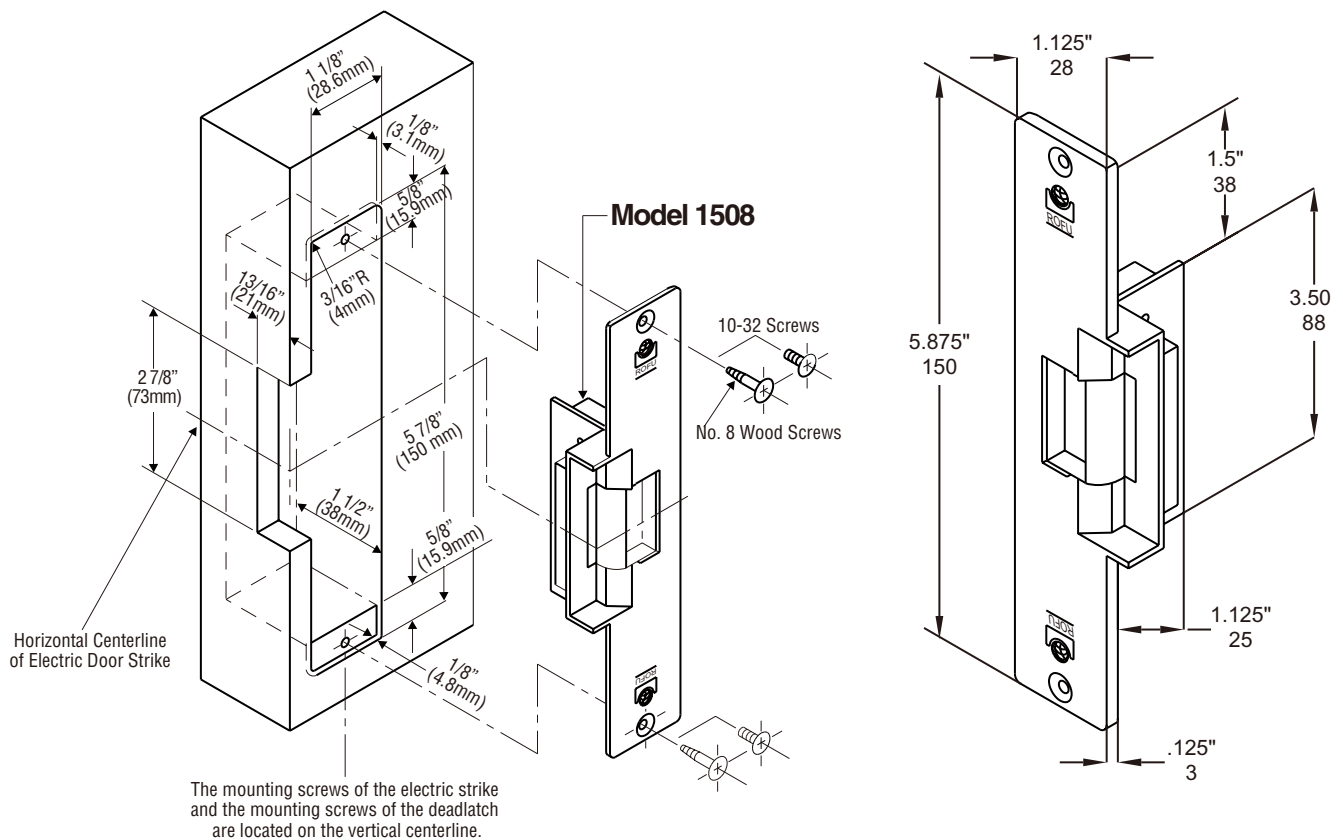

# 1509

## STANDARD FEATURES


- Fail-secure, faceplate size 7 15/16" x 1 7/16"
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4"
- Zinc/Aluminum alloy faceplate, suitable for hollow metal, aluminum or wood frames
- Reversible - non-handed
- Limited warranty - 12 months

## SPECIFICATION

|                        |                                                                     |
|------------------------|---------------------------------------------------------------------|
| <b>TAMPER STRENGTH</b> | 1000 LB (454 KG)                                                    |
| <b>VOLTAGE</b>         | 1509-01 8-16 VAC/3-6VDC<br>1509-05 12 VAC/VDC<br>1509-08 24 VAC/VDC |
| <b>FINISH</b>          | US28                                                                |



## SPECIFICATION DETAILS

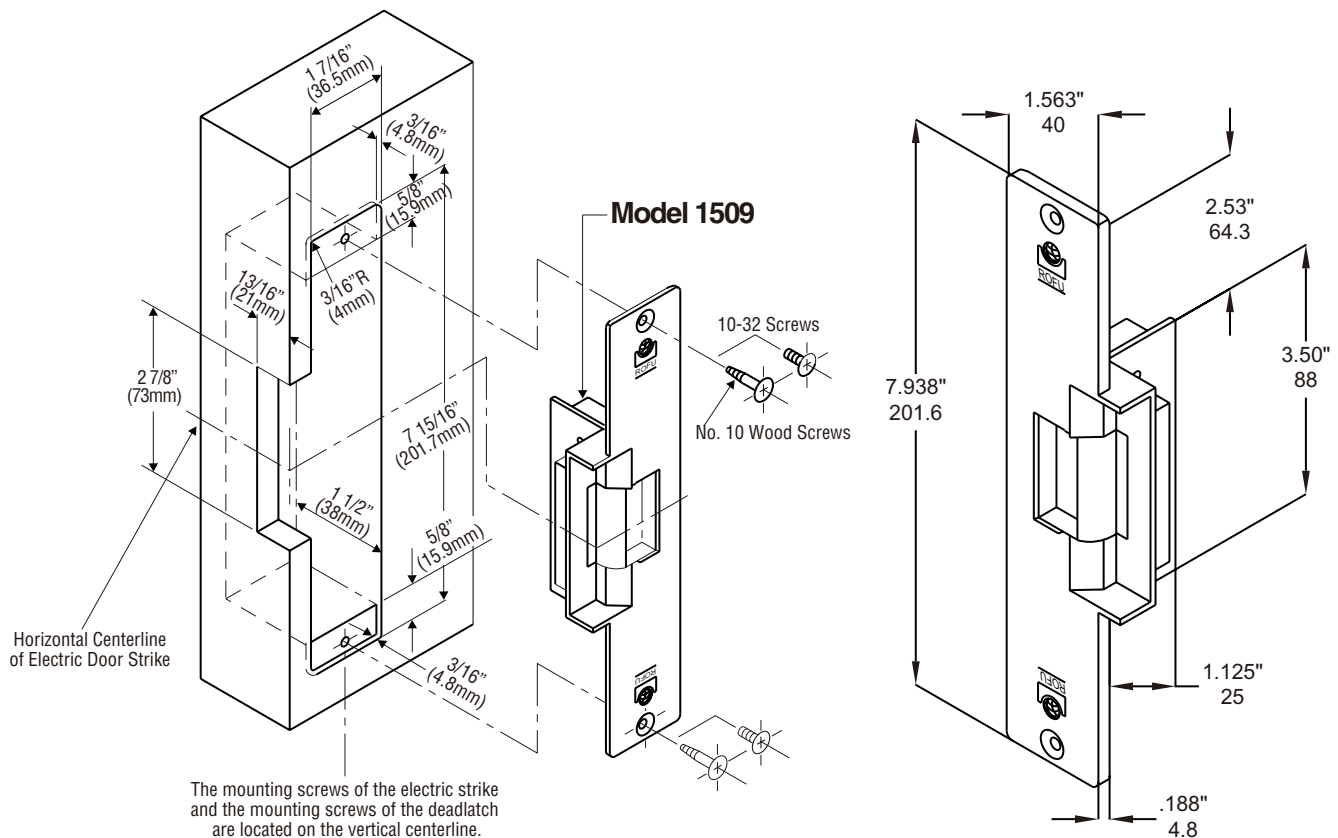



# 1512

## STANDARD FEATURES


- Fail-secure, faceplate size 4 7/16" x 1 5/8" x 1 5/32"
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4"
- Steel faceplate, suitable for hollow metal, aluminum or wood frames
- Available as Side Mount or Front Mount
- Limited warranty - 12 months

## SPECIFICATION


|                        |                                                                      |
|------------------------|----------------------------------------------------------------------|
| <b>TAMPER STRENGTH</b> | 1000 LB (454 KG)                                                     |
| <b>VOLTAGE</b>         | 1512-01 8-16 VAC/3-6 VDC<br>1512-05 12 VAC/VDC<br>1512-08 24 VAC/VDC |
| <b>FINISH</b>          | Gray                                                                 |
| <b>MOUNTING</b>        | Side Mount<br>Front Mount                                            |



## SPECIFICATION DETAILS

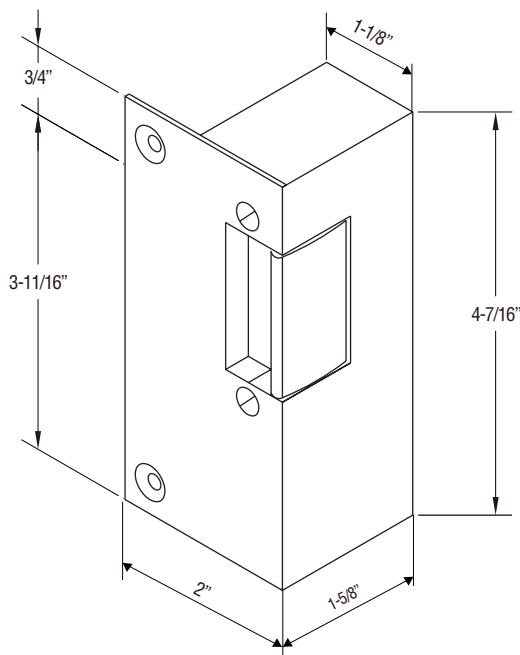

**1512  
SIDE MOUNT**

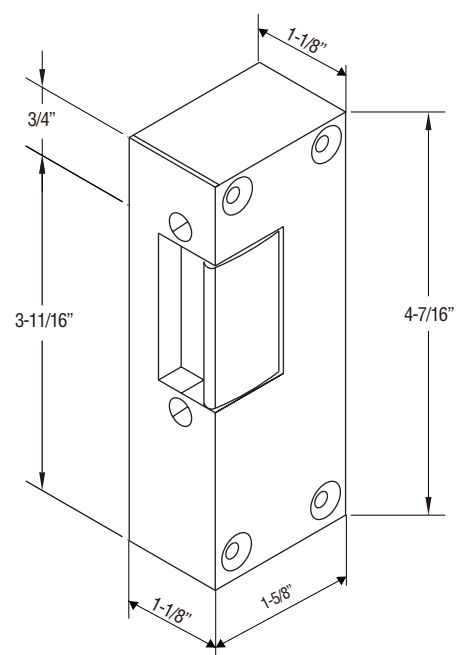

**1512-F  
FRONT MOUNT**

# 1500 SOLENOIDS ONLY

## STANDARD FEATURES

- Rated for continuous duty for VDC and intermittent duty (not exceeding 10 seconds) for VAC

## SPECIFICATION

| MODELS   | VOLTAGE  | CURRENT DRAW | OHMS |
|----------|----------|--------------|------|
| 1500-01G | 8-16 VAC | Ohm's Law    | 5    |
|          | 3-6 VDC* | Ohm's Law    | 5    |
| 1500-05G | 12 VAC   | 0.194A       | 49   |
|          | 12 VDC   | 0.240A       | 49   |
| 1500-08G | 24 VAC   | 0.123A       | 164  |
|          | 24 VDC   | 0.146A       | 164  |

\*intermittent use only at 3-6 VDC



ELECTROMAGNETS

ELECTRIC STRIKES

EXIT DEVICES

MISC. ACCESS CONTROL

# 1401/3401

## STANDARD FEATURES


- **Model 1401** - Fail-secure  
**Model 3401** - Fail-safe
- Faceplate size 1 1/4" x 5 7/8"
- Steel faceplate, suitable for wood frames
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4"
- Limited warranty - 36 months

## SPECIFICATION

|                        |                  |                  |
|------------------------|------------------|------------------|
| <b>TAMPER STRENGTH</b> | 1400 LB (635 KG) |                  |
| <b>VOLTAGE</b>         | 1401-01          | 8-16 VAC/3-6 VDC |
|                        | 1401-05          | 12 VAC/VDC       |
|                        | 1401-08          | 24 VAC/VDC       |
|                        | 3401-06          | 12 VDC           |
|                        | 3401-09          | 24 VDC           |
| <b>FINISH</b>          | US26D or US4     |                  |



## SPECIFICATION DETAILS

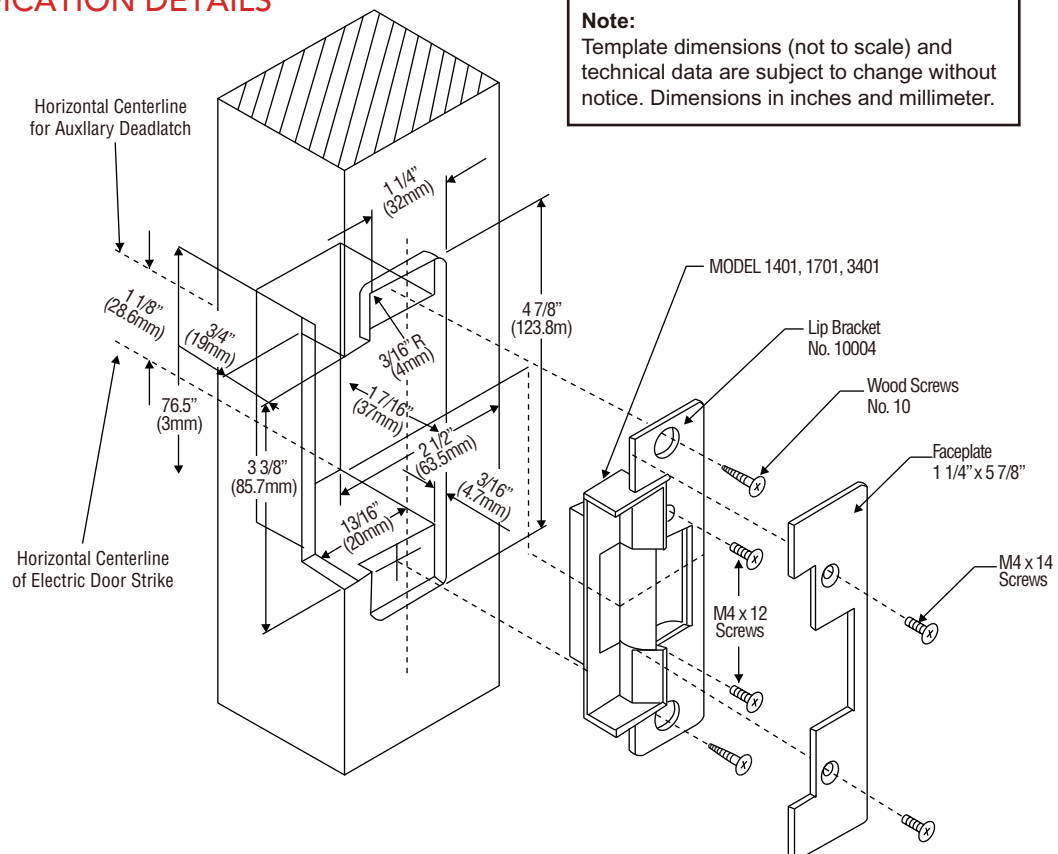

1402/3402

## STANDARD FEATURES




- **Model 1402** - Fail-secure
- **Model 3402** - Fail-safe
- Faceplate size 11/4" x 4 7/8"
- Anodized aluminum ANSI size faceplate, suitable for hollow metal, aluminum or wood frames
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4"
- Reversible - non-handed
- Limited warranty - 36 months

## SPECIFICATION

|                        |                    |                  |
|------------------------|--------------------|------------------|
| <b>TAMPER STRENGTH</b> | 1400 LB (635 KG)   |                  |
| <b>VOLTAGE</b>         | 1402-01            | 8-16 VAC/3-6 VDC |
|                        | 1402-05            | 12 VAC/VDC       |
|                        | 1402-08            | 24 VAC/VDC       |
|                        | 3402-06            | 12 VDC           |
|                        | 3402-09            | 24 VDC           |
| <b>FINISH</b>          | US28, US4 or US10B |                  |

## SPECIFICATION DETAILS

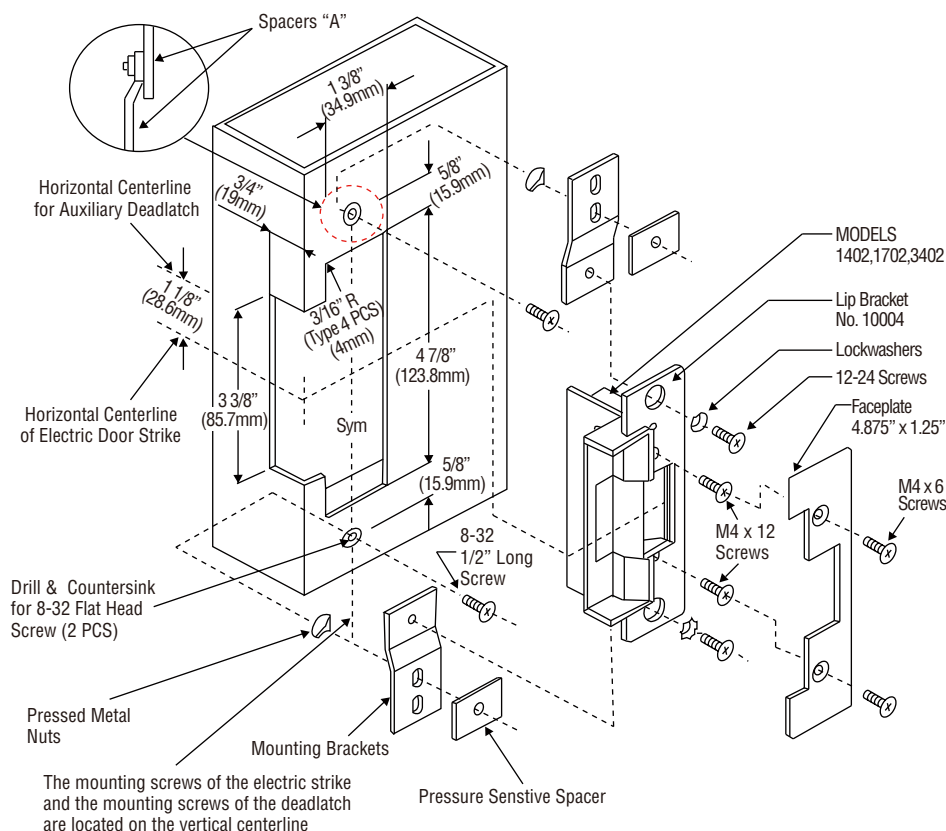

# 1403/3403

## STANDARD FEATURES


- **Model 1403** - Fail-secure
- **Model 3403** - Fail-safe
- Faceplate size 11/4" x 6 7/8"
- Anodized aluminum faceplate, suitable for hollow metal, aluminum or wood frames
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4"
- Reversible - non-handed
- Limited warranty - 36 months

## SPECIFICATION

|                        |                  |                  |
|------------------------|------------------|------------------|
| <b>TAMPER STRENGTH</b> | 1400 LB (635 KG) |                  |
| <b>VOLTAGE</b>         | 1403-01          | 8-16 VAC/3-6 VDC |
|                        | 1403-05          | 12 VAC/VDC       |
|                        | 1403-08          | 24 VAC/VDC       |
|                        | 3403-06          | 12 VDC           |
|                        | 3403-09          | 24 VDC           |
| <b>FINISH</b>          | US28 or US10B    |                  |



## SPECIFICATION DETAILS

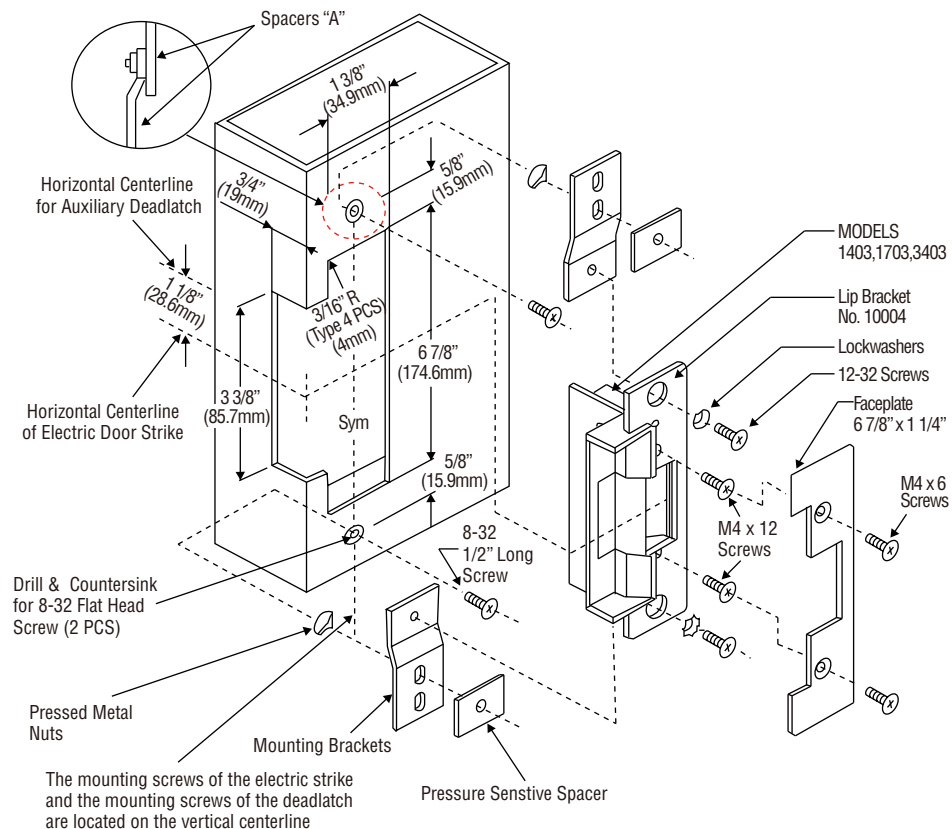

# 1404/3404


## STANDARD FEATURES

- **Model 1404** - Fail-secure  
**Model 3404** - Fail-safe
- Faceplate size 1 7/16" x 7 15/16"
- Anodized aluminum faceplate, suitable for hollow metal, aluminum or wood frames
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4"
- Reversible - non-handed
- Limited warranty - 36 months

## SPECIFICATION

|                        |                    |                  |
|------------------------|--------------------|------------------|
| <b>TAMPER STRENGTH</b> | 1400 LB (635 KG)   |                  |
| <b>VOLTAGE</b>         | 1404-01            | 8-16 VAC/3-6 VDC |
|                        | 1404-05            | 12 VAC/VDC       |
|                        | 1404-08            | 24 VAC/VDC       |
|                        | 3404-06            | 12 VDC           |
|                        | 3404-09            | 24 VDC           |
| <b>FINISH</b>          | US28, US4 or US10B |                  |

## SPECIFICATION DETAILS

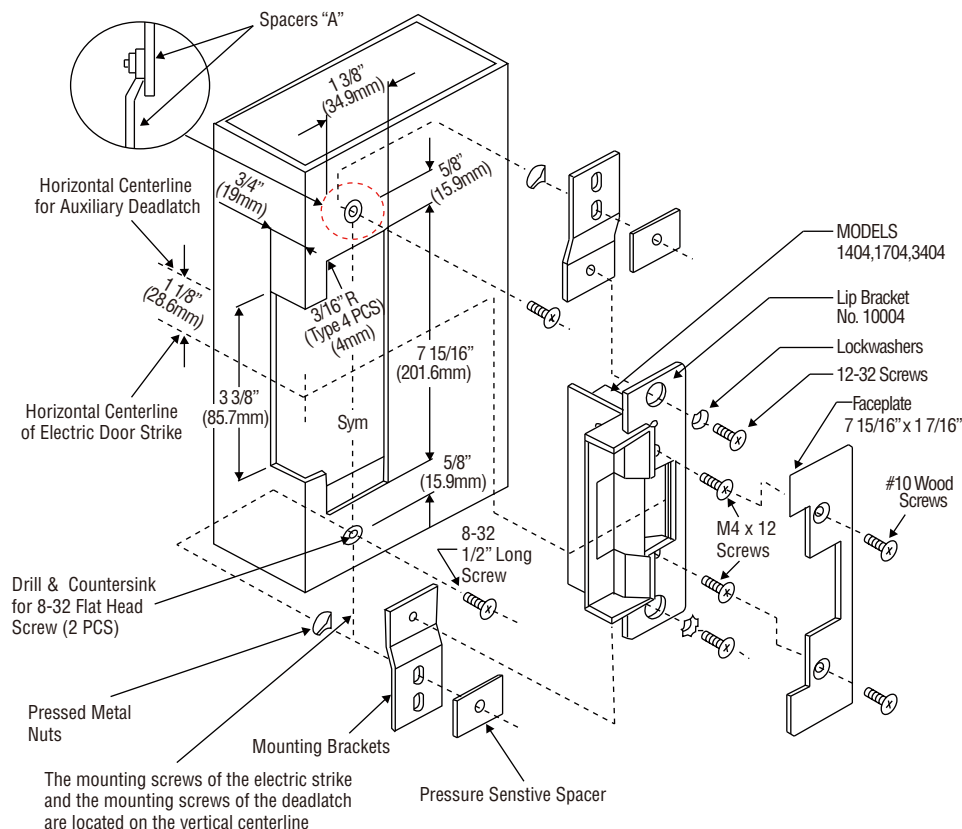



# 1430/3430



## STANDARD FEATURES

- **Model 1430** - Fail-secure  
**Model 3430** - Fail-safe
- ANSI/BHMA A 156.5 (1 1/4" x 4 7/8"), for use with cylindrical and mortise locksets
- Stainless steel, corrosion-resistant faceplate, suitable for hollow metal, aluminum or wood frames, fits cutout specification A 115.1 (with slight jamb modification)
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4" Keeper opening - 3/8" below center line
- **Handed - please specify RH or LH**
- Limited warranty - 36 months

## SPECIFICATION

|                        |                              |                  |
|------------------------|------------------------------|------------------|
| <b>TAMPER STRENGTH</b> | 1700 LB (765 KG)             |                  |
| <b>VOLTAGE</b>         | 1430-01 RH                   | 8-16 VAC/3-6 VDC |
|                        | 1430-01 LH                   | 8-16 VAC/3-6 VDC |
|                        | 1430-05 RH                   | 12 VAC/VDC       |
|                        | 1430-05 LH                   | 12 VAC/VDC       |
|                        | 1430-08 RH                   | 24 VAC/VDC       |
|                        | 1430-08 LH                   | 24 VAC/VDC       |
|                        | 3430-06 RH                   | 12 VDC           |
|                        | 3430-06 LH                   | 12 VDC           |
|                        | 3430-09 RH                   | 24 VDC           |
|                        | 3430-09 LH                   | 24 VDC           |
| <b>FINISH</b>          | US32D, US3 (plated) or US10B |                  |

## SPECIFICATION DETAILS

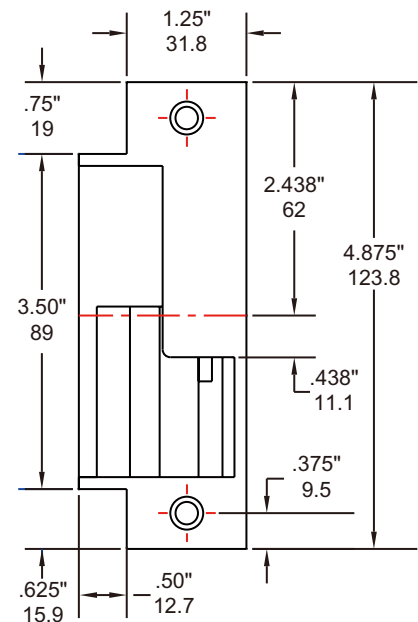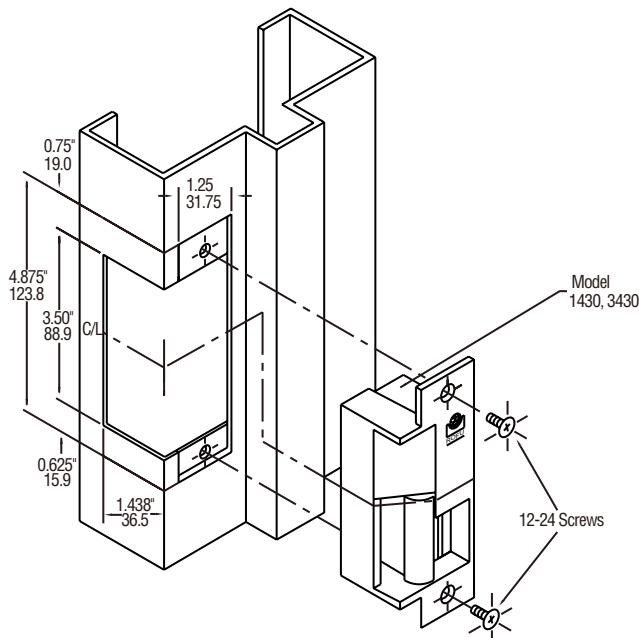

# 1440/3440



## STANDARD FEATURES

- **Model 1440** - Fail-Secure  
**Model 3440** - Fail-Safe
- ANSI/BHMA A 156.5 (1 1/4" x 4 7/8"), for use with cylindrical and mortise locksets
- Stainless steel, corrosion-resistant faceplate, suitable for hollow metal, aluminum or wood frames, fits cutout specification A 115.1 (with slight jamb modification)
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4" Keeper opening starts at center line
- **Handed - please specify RH or LH**
- Limited warranty - 36 months

## SPECIFICATION

| TAMPER STRENGTH | 1700LB (765KG)               |                 |
|-----------------|------------------------------|-----------------|
| VOLTAGE         | 1440-01 RH                   | 8-16VAC/3-6 VDC |
|                 | 1440-01 LH                   | 8-16VAC/3-6 VDC |
|                 | 1440-05 RH                   | 12 VAC/VDC      |
|                 | 1440-05 LH                   | 12 VAC/VDC      |
|                 | 1440-08 RH                   | 24 VAC/VDC      |
|                 | 1440-08 LH                   | 24 VAC/VDC      |
|                 | 3440-06 RH                   | 12 VDC          |
|                 | 3440-06 LH                   | 12 VDC          |
|                 | 3440-09 RH                   | 24 VDC          |
|                 | 3440-09 LH                   | 24 VDC          |
| FINISH          | US32D, US3 (plated) or US10B |                 |

## SPECIFICATION DETAILS

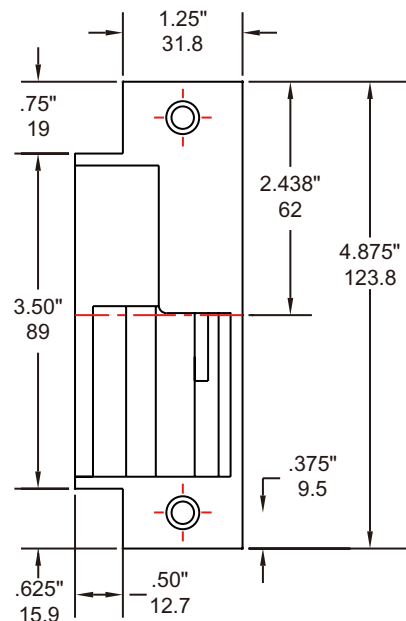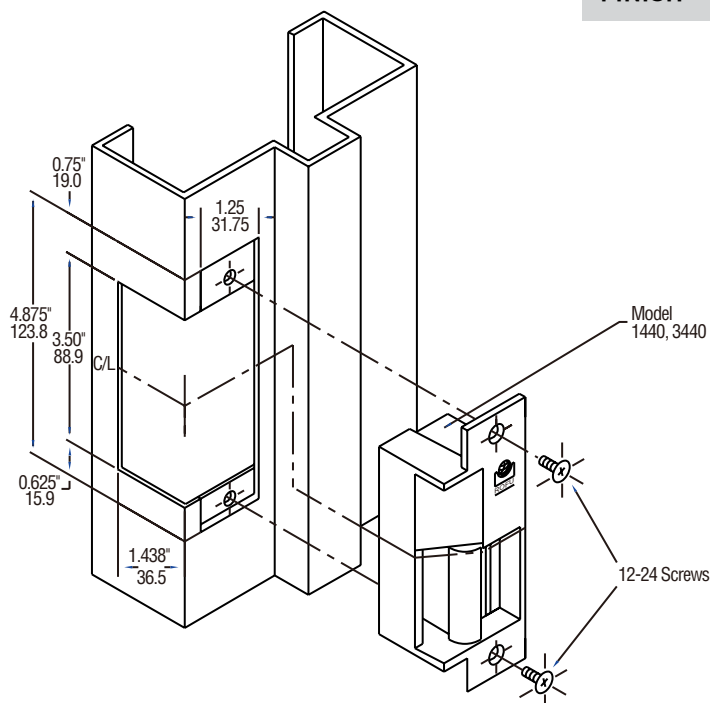

# 1450/3450

## STANDARD FEATURES



- **Model 1450** - Fail-secure  
**Model 3450** - Fail-safe
- ANSI/BHMA A 156.5 (1 1/4" x 4 7/8"), for use with cylindrical and mortise locksets
- Stainless steel, corrosion-resistant faceplate, suitable for hollow metal, aluminum or wood frames, fits cutout specification A 115.1 (with slight jamb modification)
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4" Keeper opening starts at center line
- Fully tamper proof horizontal adjustment
- Reversible - non-handed
- Limited warranty - 36 months

## SPECIFICATION

|                        |                              |                  |
|------------------------|------------------------------|------------------|
| <b>TAMPER STRENGTH</b> | 1700 LB (765 KG)             |                  |
| <b>VOLTAGE</b>         | 1450-01                      | 8-16 VAC/3-6 VDC |
|                        | 1450-05                      | 12V AC/VDC       |
|                        | 1450-08                      | 24 VAC/VDC       |
|                        | 3450-06                      | 12 VDC           |
|                        | 3450-09                      | 24 VDC           |
| <b>FINISH</b>          | US32D, US3 (plated) or US10B |                  |



## SPECIFICATION DETAILS

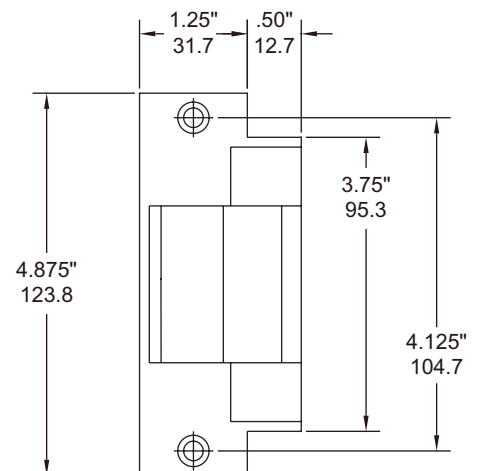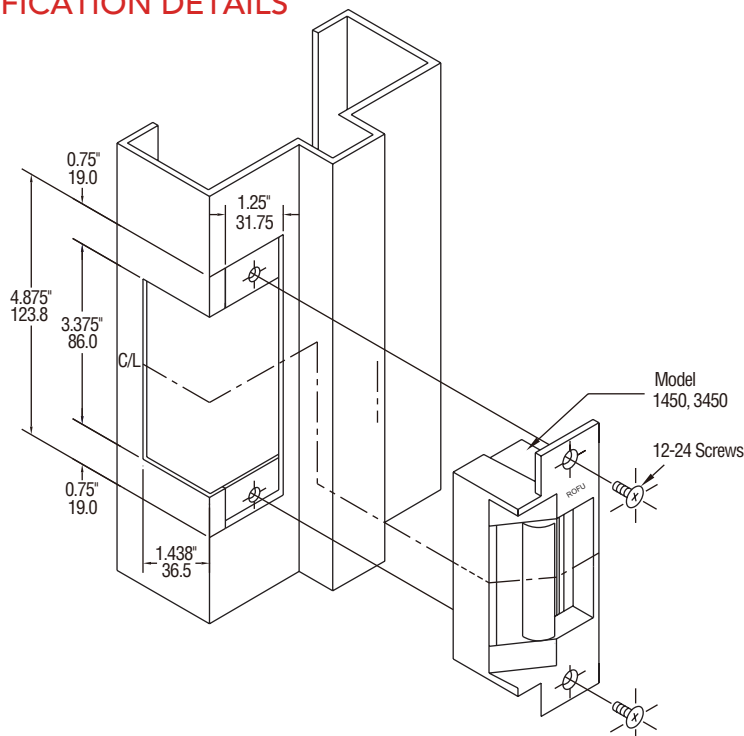

# 1460/3460



## STANDARD FEATURES

- **Model 1460** - Fail-secure
- **Model 3460** - Fail-safe
- Faceplate size 1 3/8" x 9"
- Stainless steel, corrosion-resistant faceplate, suitable for hollow metal, aluminum or wood frames
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4" Keeper opening starts at center line
- Fully tamper proof horizontal adjustment
- 1 1/2" jamb modification
- Reversible - non-handed (without deadbolt)
- Limited warranty - 36 months



## OPTIONAL FEATURES

Cutout for deadbolt  
(Specify 1460B-LH or 1460B-RH with required voltage)

## SPECIFICATION

|                        |                              |                  |
|------------------------|------------------------------|------------------|
| <b>TAMPER STRENGTH</b> | 1700 LB (765 KG)             |                  |
| <b>VOLTAGE</b>         | 1460-01                      | 8-16 VAC/3-6 VDC |
|                        | 1460-05                      | 12 VAC/VDC       |
|                        | 1460-08                      | 24 VAC/VDC       |
|                        | 3460-06                      | 12 VDC           |
|                        | 3460-09                      | 24 VDC           |
| <b>FINISH</b>          | US32D, US3 (plated) or US10B |                  |

## SPECIFICATION DETAILS

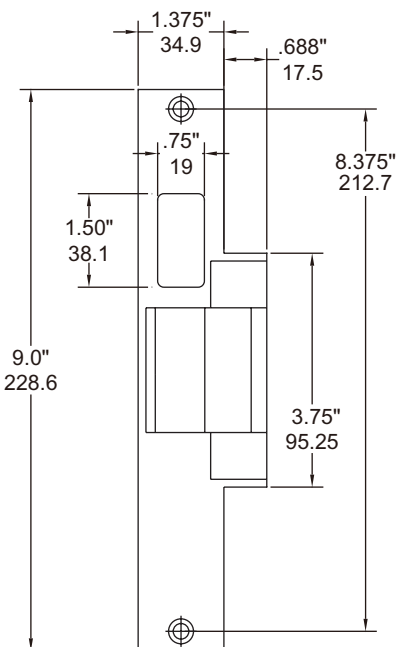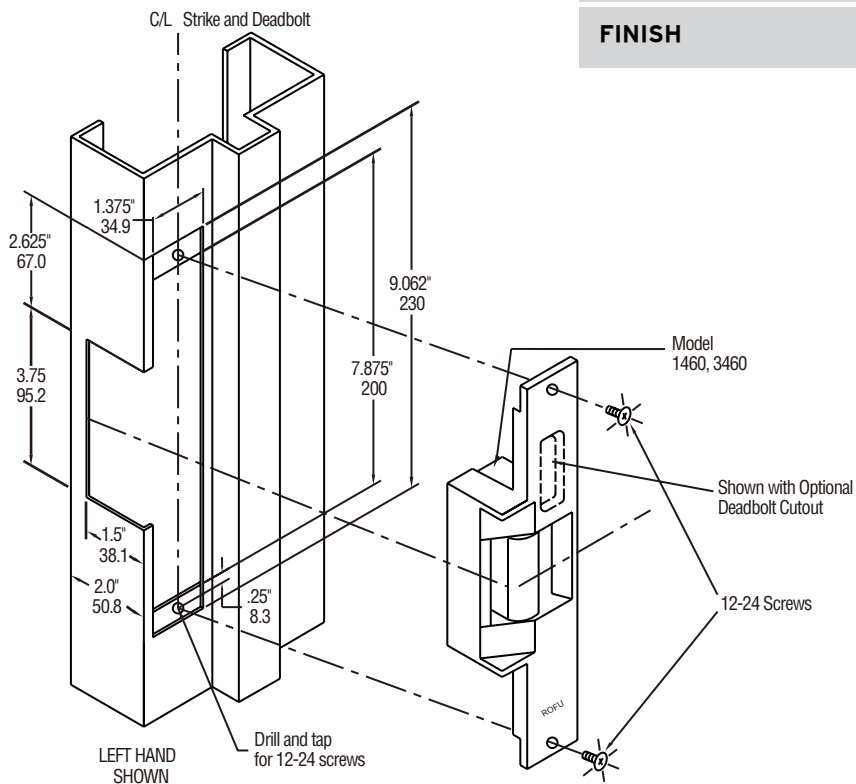


# 1470B/3470B

## STANDARD FEATURES


- **Model 1470** - Fail-secure  
**Model 3470** - Fail-safe
- Faceplate size 1 3/8" x 9"
- Stainless steel, corrosion-resistant faceplate, suitable for hollow metal, aluminum or wood frames
- Keeper depth - 5/8" maximum latch projection possible with 1/8" door/frame clearance - 3/4" Keeper opening starts at center line
- Cutout for deadbolt (Specify 1470B-LH or 1470B-RH, 3470B-LH or 3470B-RH)
- Fully tamper proof horizontal adjustment
- 2" jamb modification
- Limited warranty - 36 months

## SPECIFICATION DETAILS

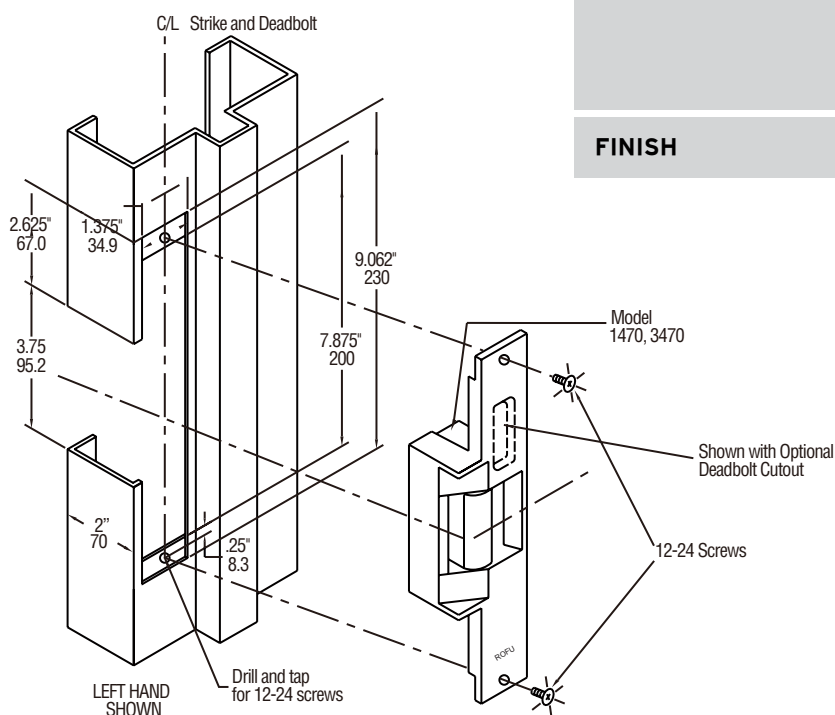

## SPECIFICATION

|                        |                                                                                                                                                                                                                                                              |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>TAMPER STRENGTH</b> | 1700 LB (765 KG)                                                                                                                                                                                                                                             |
| <b>VOLTAGE</b>         | 1470-01B/RH 8-16 VAC/3-6 VDC<br>1470-01B/LH 8-16 VAC/3-6 VDC<br>1470-05B/RH 12 VAC/VDC<br>1470-05B/LH 12 VAC/VDC<br>1470-08B/RH 24 VAC/VDC<br>1470-08B/LH 24 VAC/VDC<br>3470-06B/LH 12 VDC<br>3470-06B/RH 12 VDC<br>3470-09B/LH 24 VDC<br>3470-09B/RH 24 VDC |
| <b>FINISH</b>          | US32D, US3 (plated) or US10B                                                                                                                                                                                                                                 |

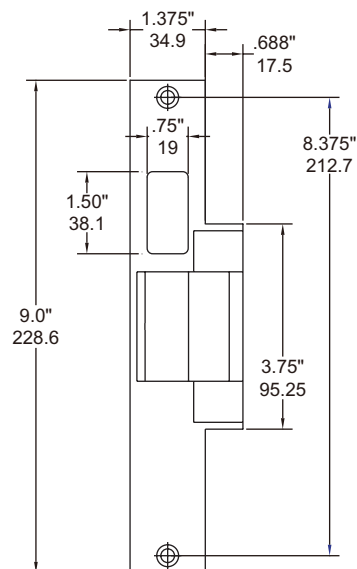

# 1400 SOLENOID



## STANDARD FEATURES

- Rated for continuous for VDC and intermittent duty (not exceeding 10 seconds) for VAC
- Specify **RH** solenoids for Models 1401, 1430LH, 1440LH
- Specify **LH** solenoids for Models 1430RH, 1440RH,
- **1400-G Series** are centerd (non-handed), compatible for all models except 1430 and 1440

## SPECIFICATION

| MODELS          | VOLTAGE    | CURRENT DRAW      | OHMS |
|-----------------|------------|-------------------|------|
| <b>1400-01G</b> | 8-16 VAC   | 0.33~0.8A / 0.75A | 16   |
| <b>1400-01R</b> | 3-6 VDC*   | Ohm's Law         | 5    |
| <b>1400-01L</b> |            | Ohm's Law         | 5    |
| <b>1400-05G</b> |            | 0.28A             | 41   |
| <b>1400-05R</b> | 12 VAC/VDC | 0.194A/0.24A      | 49   |
| <b>1400-05L</b> |            | 0.194A/0.24A      | 49   |
| <b>1400-08G</b> |            | 0.16A             | 148  |
| <b>1400-08R</b> | 24 VAC/VDC | 0.123A/0.146A     | 164  |
| <b>1400-08L</b> |            | 0.123A/0.146A     | 164  |

\*intermittent use only at 3-6 VDC

# 3400 SOLENOID

## STANDARD FEATURES

- Rated for continuous duty, VDC only.
- Specify **RH** solenoids for Models 3401, 3430LH, 3440LH, 3460B/RH and 3470B/RH
- Specify **LH** solenoids for Models 3430RH, 3440RH, 3460B/LH and 3470B/LH

## SPECIFICATION

| MODELS          | VOLTAGE | CURRENT DRAW | OHMS  |
|-----------------|---------|--------------|-------|
| <b>3400-06R</b> | 12 VDC  | 0.24A        | 50.3  |
| <b>3400-06L</b> |         |              |       |
| <b>3400-09R</b> | 24 VDC  | 0.10A        | 232.2 |
| <b>3400-09L</b> |         |              |       |

# 1700 SOLENOID



## STANDARD FEATURES

- Rated for continuous for VDC and intermittent duty (not exceeding 10 seconds) for VAC
- Adjustable keeper included

## SPECIFICATION

| MODELS         | VOLTAGE            | CURRENT DRAW | OHMS |
|----------------|--------------------|--------------|------|
| <b>1700-01</b> | 8-16 VAC, 3-6 VDC* | 0.33~0.8A    | 16   |
| <b>1700-05</b> | 12 VAC/VDC         | 0.28A        | 41   |
| <b>1700-07</b> | 24 VAC/VDC         | 0.16A        | 148  |
| <b>1700-08</b> | 24 VDC             | 0.14A        | 170  |

\*intermittent use only at 3-6 VDC



# 1701

## STANDARD FEATURES

- Fail-secure, faceplate size 1 1/4" x 5 7/8"
- Steel faceplate, suitable for wood frames
- Adjustable keeper, depth - 1/2" max latch projection possible with 1/8" door/frame clearance - 3/4"
- Limited warranty - 36 months

## SPECIFICATION

|                        |                                                                                        |
|------------------------|----------------------------------------------------------------------------------------|
| <b>TAMPER STRENGTH</b> | 1000 LB (454 KG)                                                                       |
| <b>VOLTAGE</b>         | 1701-01 8-16 VAC/3-6 VDC<br>1701-05 12 VAC/VDC<br>1701-07 24 VAC/VDC<br>1701-08 24 VDC |
| <b>FINISH</b>          | US26D, or US4                                                                          |



# 1702

## STANDARD FEATURES

- Fail-secure, faceplate size 1 1/4" x 4 7/8"
- Anodized aluminum ANSI size faceplate, suitable for hollow metal, aluminum or wood frames
- Adjustable keeper, depth - 1/2" max latch projection possible with 1/8" door/frame clearance - 3/4"
- Reversible - non-handed
- Limited warranty - 36 months

## SPECIFICATION

|                        |                                                                                        |
|------------------------|----------------------------------------------------------------------------------------|
| <b>TAMPER STRENGTH</b> | 1000 LB (454 KG)                                                                       |
| <b>VOLTAGE</b>         | 1702-01 8-16 VAC/3-6 VDC<br>1702-05 12 VAC/VDC<br>1702-07 24 VAC/VDC<br>1702-08 24 VDC |
| <b>FINISH</b>          | US28, US4 or US10B                                                                     |



# 1703

## STANDARD FEATURES

- Fail-secure, faceplate size 1 1/4" x 6 7/8"
- Anodized aluminum faceplate, suitable for hollow metal, aluminum or wood frames
- Adjustable keeper, depth - 1/2" max latch projection possible with 1/8" door/frame clearance - 3/4"
- Reversible - non-handed
- Limited warranty - 36 months

## SPECIFICATION

|                        |                                                                                        |
|------------------------|----------------------------------------------------------------------------------------|
| <b>TAMPER STRENGTH</b> | 1000 LB (454 KG)                                                                       |
| <b>VOLTAGE</b>         | 1703-01 8-16 VAC/3-6 VDC<br>1703-05 12 VAC/VDC<br>1703-07 24 VAC/VDC<br>1703-08 24 VDC |
| <b>FINISH</b>          | US28 or US10B                                                                          |



ELECTROMAGNETS

ELECTRIC STRIKES

# 1704

## STANDARD FEATURES

- Fail-secure, faceplate size 1 7/16" x 7 15/16"
- Anodized aluminum faceplate, suitable for hollow metal, aluminum or wood frames
- Adjustable keeper, depth - 1/2" max latch projection possible with 1/8" door/frame clearance - 3/4"
- Reversible - non-handed
- Limited warranty - 36 months

## SPECIFICATION

|                        |                                                                                        |
|------------------------|----------------------------------------------------------------------------------------|
| <b>TAMPER STRENGTH</b> | 1000 LB (454KG)                                                                        |
| <b>VOLTAGE</b>         | 1704-01 8-16 VAC/3-6 VDC<br>1704-05 12 VAC/VDC<br>1704-07 24 VAC/VDC<br>1704-08 24 VDC |
| <b>FINISH</b>          | US28, US4 or US10B                                                                     |



EXIT DEVICES

MISC. ACCESS CONTROL

# 1106 SERIES

1106 Series Strikes are fail-secure, weatherproof electric strike for gate locks. One piece strike body made of cast zinc alloy, suitable for cylindrical and mortise locksets and for hollow metal and wood frame doors.


The new water drainage design makes it suitable for use on gates or semi-outdoor applications.

## STANDARD FEATURES

- Fail-secure operation
- Weatherproof
- Static strength 1000 LB (470 KG)
- One piece cast zinc alloy construction
- Non-handed, fully reversible
- Net weight: 343g
- Tested to 250,000+ cycles
- Can be powered by VDC for continuous duty and VAC for intermittent use, (not exceeding 10 seconds)

## COMPATIBLE LOCKS

Designed for Cylindrical Locksets




## SPECIFICATION

| MODELS          | 1106-01                               | 1106-02       |
|-----------------|---------------------------------------|---------------|
| VOLTAGE         | 8-16 VAC Only                         | 12/24 VAC/VDC |
| FINISH          | US28 or US4                           |               |
| HOLDING FORCE   | 1000 LB (470KG)                       |               |
| LATCH THROW     | 9/16" (15mm)                          |               |
| KEEPER WIDTH    | 1 5/8" (41mm)                         |               |
| DIMENSION       | 3 1/2" (L) x 1 7/16" (W) x 2 5/8" (D) |               |
| OPERATING TEMP. | 14°F to 133°F (-10°C~+45°C)           |               |

## FRAME APPLICATIONS

Hollow Metal

Wood

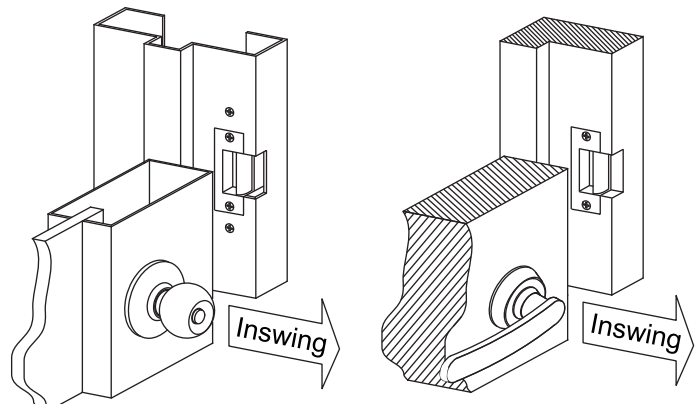

# 2400 KIT

2400 Kit is a universal, burglary-resistant electric strike, compatible with a wide range of cylindrical locksets. The kit includes two faceplates and is dual voltage and field reversible between fail-safe and fail-secure.


Optional accessories are specifically designed for this universal electric strike, 2402 jig is a useful tool for jamb preparation while 1" and 2" lip extensions are also available.

## STANDARD FEATURES


- Dual voltage 12/24 VDC field selectable (VAC for intermittent duty), PoE friendly.
- Field reversible: fail-safe or fail-secure
- Non-handed, fully reversible
- Complete with two stainless faceplates: 1 1/4" x 4 7/8" (ANSI) and 1 7/16" x 7 15/16"
- Tested to 250,000 cycles (UL Certified)
- Low Profile: 1 1/4" depth overall
- UL Listed for burglary-resistant under file CVXY.BP3741



## 2402 JIG INSTALLATION

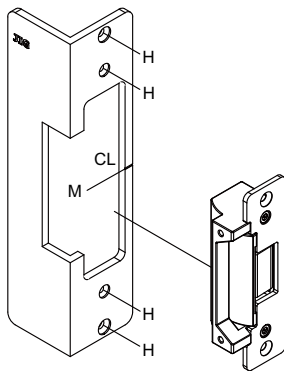

## 5525/5550 INSTALLATION



## SPECIFICATION

|                         |                                      |
|-------------------------|--------------------------------------|
| <b>VOLTAGE</b>          | 12/24 VDC                            |
| <b>CURRENT</b>          | 300 mA/12 VDC, 150 mA/24 VDC         |
| <b>STATIC STRENGTH</b>  | 1000 LB (454 KG)                     |
| <b>DYNAMIC STRENGTH</b> | 50-ft-lbs. (6.91 m-kgs)              |
| <b>DIMENSION</b>        | 4 7/8" (L) x 1 1/4" (W) x 1 1/4" (D) |
| <b>OPERATING TEMP.</b>  | 32°F to 120°F (0°C~+49°C)            |

## OPTIONAL ACCESSORIES

| MODELS                                                                                                 | DESCRIPTION                                                      |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| <br><b>2402 JIG</b> | Jamb Preparation for ANSI Sized Strike                           |
| <br><b>5525</b>     | 1" Lip Extension (Model: 5525)<br>2" Lip Extension (Model: 5550) |
| <br><b>5550</b>     |                                                                  |

# 2420



The 2420 Series ANSI electric strikes are designed for use with cylindrical locksets and can be installed on metal and wood door frames. The strikes can be configured to fail-safe or fail-secure on site.

## STANDARD FEATURES


- No frame cutting is required
- Dual voltage 12/24 VDC field selectable
- Non-handed fully reversible
- Field reversible: fail-safe or fail-secure
- Static strength 1500 LB (680 KG)
- Dynamic strength 70 ft-lbs
- Endurance 100,000 cycles UL tested
- Brushed stainless steel (US32D) finish



## SPECIFICATION

|                         |                              |
|-------------------------|------------------------------|
| <b>VOLTAGE</b>          | 12/24 VDC                    |
| <b>CURRENT</b>          | 300 mA/12 VDC, 150 mA/24 VDC |
| <b>STATIC STRENGTH</b>  | 1500 LB (680 KG)             |
| <b>DYNAMIC STRENGTH</b> | 70-ft-lbs. (9.67 m-kgs)      |
| <b>DIMENSION</b>        | 4 7/8" x 1 1/4" x 1 1/16"    |
| <b>LATCH THROW</b>      | 9/16" max                    |
| <b>KEEPER WIDTH</b>     | 1 7/16" max                  |

## Dimensions

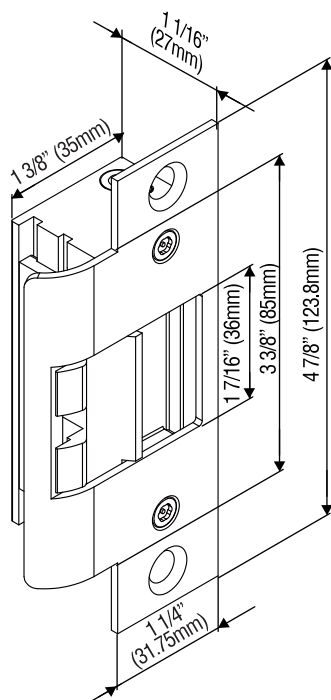


## OPTIONAL FEATURE

|                         |                      |
|-------------------------|----------------------|
| <b>MODEL</b>            | 2420-LM              |
| <b>LATCH MONITORING</b> | Rating: 0.3 A/ 6 VDC |

## Changing Fail-Safe / Fail-Secure

Fail-safe or fail-secure is field reversible by reversing the round screw.

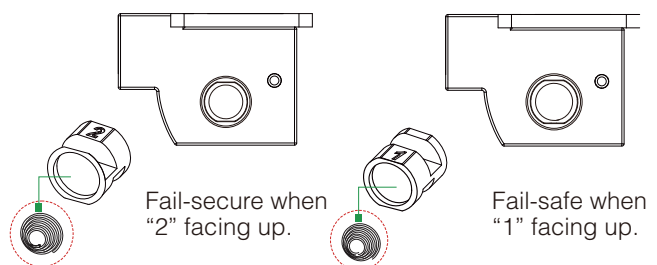



# 2435 KIT

2435 Kit, completes with five heavy duty stainless steel faceplates, is designed for mortise and cylindrical locksets. It is reversible for left hand or right hand installation and operates at 12 and 24 VDC.

## STANDARD FEATURES


- Heavy duty stainless steel construction
- Vertical adjustments allow for alignment with a wide variety of mortise locks with offset latches
- Dual voltage 12/24 VDC (VAC for intermittent use, not exceeding 10 seconds)
- Sliding keeper shim design for up to 1/8" (3 mm) adjustment for misaligned frames
- Endurance testing: 1,000,000 cycles tested

## SPECIFICATION


|                         |                                      |
|-------------------------|--------------------------------------|
| <b>VOLTAGE</b>          | 12/24 VDC                            |
| <b>CURRENT</b>          | 250 mA/12 VDC, 150 mA/24 VDC         |
| <b>STATIC STRENGTH</b>  | 1000 LB (454 KG)                     |
| <b>DYNAMIC STRENGTH</b> | 33-ft-lbs. (4.56 m-kgs)              |
| <b>DIMENSION</b>        | 3 5/16" (4 5/8") x 1 5/8" x 1 13/16" |
| <b>Latch Throw</b>      | 1" max with 1/8" door gap            |

## Faceplates Dimensions

Deadbolt Latch Installation

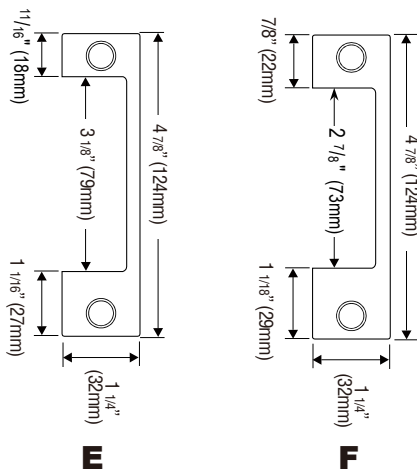


Latchbolt Installation

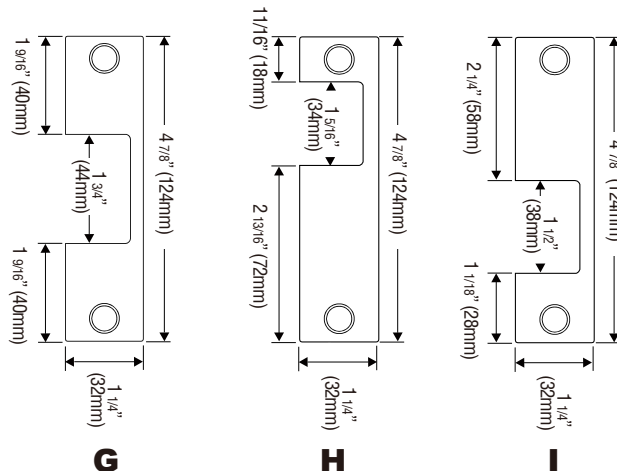


## Changing Fail-Safe / Fail-Secure

2435 Kit is field reversible for fail-safe or fail-secure by changing the position of screws.

Fail-Safe (Power to Lock):

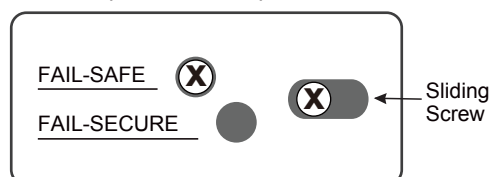

Fail-Secure (Power to Open):

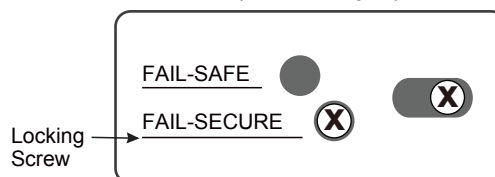



# 2460

ROFU 2460 Rim Mount Strike is a partial surface mount electric strike designed for doors with crash bars. Latch and lock status monitoring is standard for 2460, and the strike operates at 12~28 VDC/VAC. The strike can be easily reversed between fail-safe and fail-secure.

## STANDARD FEATURES


- Field reversible: fail-safe or fail-secure
- Non-handed and fully reversible
- Accommodates 11/16" (17mm) latchbolt
- Static strength 1500 LB (680 KG)
- Latch & lock monitoring
- Surface mounted
- Zinc alloy construction in black finish
- Endurance testing: 1,000,000 cycles tested
- Anti-friction roller keeper



## SPECIFICATION

|                            |                                                              |
|----------------------------|--------------------------------------------------------------|
| <b>VOLTAGE</b>             | 12~28 VAC/VDC                                                |
| <b>CURRENT</b>             | 230 mA/12 VDC, 140 mA/28 VDC<br>440 mA/12 VAC, 230 mA/28 VAC |
| <b>STATIC STRENGTH</b>     | 1500 LB (680 KG)                                             |
| <b>OPERATING TEMP.</b>     | 14°F to 113°F (-10°C~+45°C)                                  |
| <b>DIMENSION</b>           | 9 1/8" x 1 9/16" x 13/16" (1 3/16")                          |
| <b>Maximum Latch Throw</b> | 11/16" (17mm)                                                |

## Hollow Metal Installation

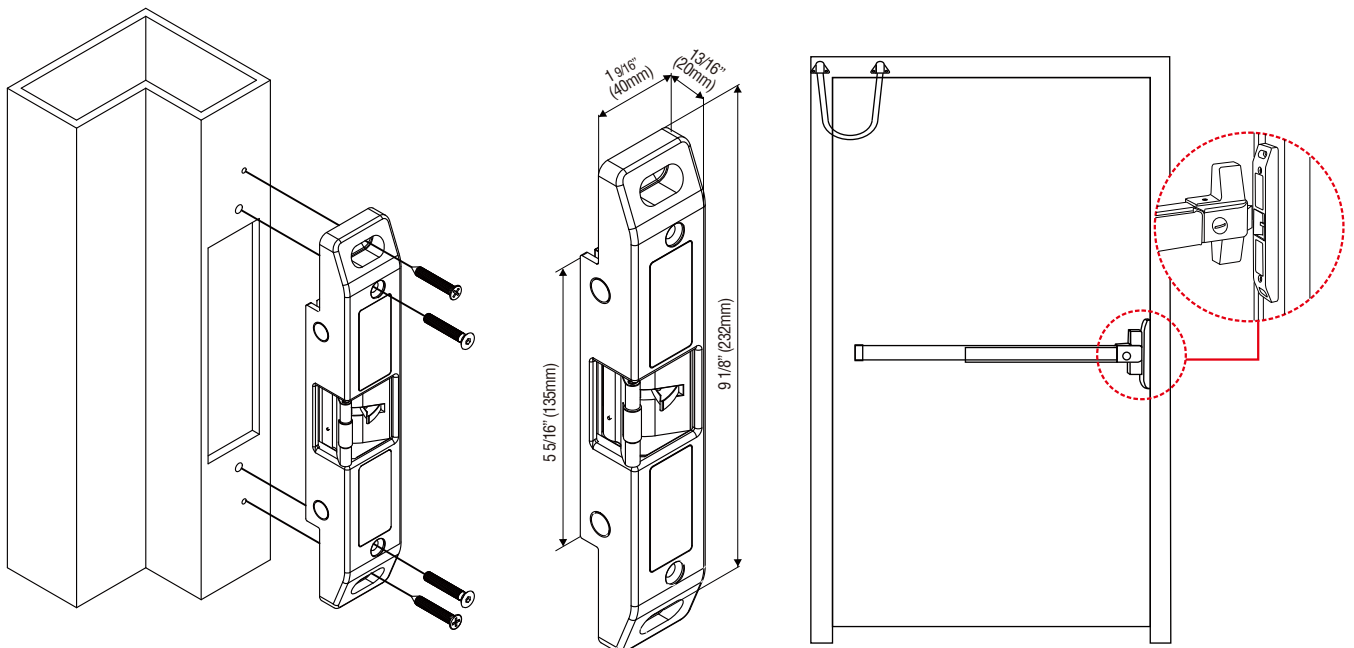

# 2470

ROFU 2470 Rim Mount Strike is a fully surface mount strike and designed with strength and durability for rim exit devices with a 3/4" latch throw.

No cutting on the frame is required and it is field selectable for fail-safe and fail-secure. The strike operates at both 12 and 24 VDC and is designed for indoor use only.




## STANDARD FEATURES

- Dual voltage 12/24 VDC field selectable
- Field reversible: fail-secure or fail-safe
- No frame cutting required - surface mounted
- Non-handed fully reversible
- Horizontal adjustment
- Static strength 1500 LB (680 KG)
- Dynamic strength 70 ft-lbs (9.68 m-kgs)
- Endurance rating 250,000 cycles UL tested,
- 1,000,000 factory tested

## SPECIFICATION


|                          |                                           |
|--------------------------|-------------------------------------------|
| <b>VOLTAGE</b>           | 12/24 VDC                                 |
| <b>CURRENT DRAW</b>      | 540 mA/12 VDC, 270 mA/24 VDC              |
| <b>MODE</b>              | Field reversible fail-safe or fail-secure |
| <b>STATIC STRENGTH</b>   | 1500 LB (680 KG)                          |
| <b>DYNAMIC STRENGTH</b>  | 70 ft-lbs (9.68 m-kgs)                    |
| <b>HOUSING THICKNESS</b> | 3/4" (19 mm)                              |
| <b>OPERATING TEMP.</b>   | 14°F to 120°F (-10°C~+49°C)               |
| <b>HUMIDITY</b>          | 0~85% non-condensing                      |
| <b>DIMENSIONS</b>        | 8" x 1 3/4" x 3/4"                        |

## APPLICATION

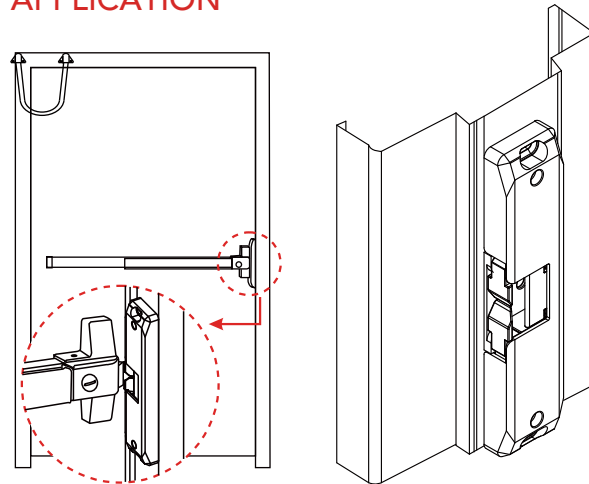

## CHANGING FAIL-SAFE / FAIL-SECURE

Fail-safe or fail-secure is field reversible by changing the position of screws.

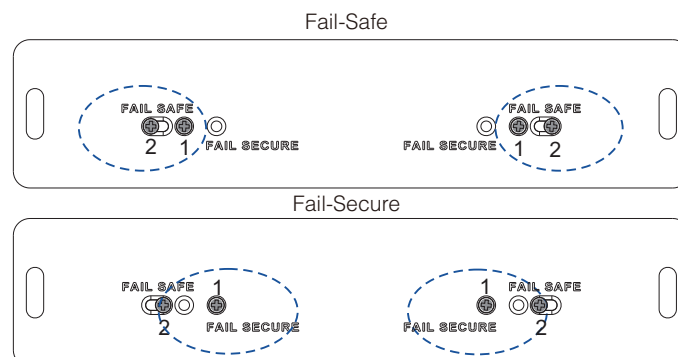

## 2490

ROFU 2490 Rim Mount Strike is a fully surface mount strike and designed with strength and durability for rim exit devices with a 1/2" latch throw.


No cutting on the frame is required and it is field selectable for fail-safe and fail-secure. The strike operates at both 12 and 24 VDC and is designed for indoor use only.



### STANDARD FEATURES

- Dual voltage 12/24 VDC field selectable
- Field reversible: fail-safe or fail-secure
- No frame cutting required, surface mounted
- Non-handed fully reversible
- Horizontal adjustment
- Static strength 1500 LB (680 KG)
- Dynamic strength 70 ft-lbs (9.68 m-kgs)
- Endurance rating 250,000 cycles, 1,000 000 factory tested


### DIMENSIONS

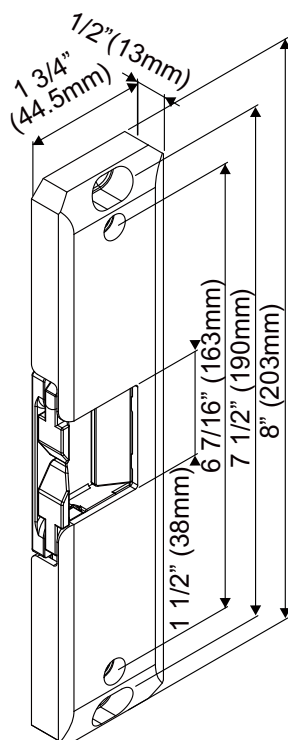

### SPECIFICATION


|                          |                                           |
|--------------------------|-------------------------------------------|
| <b>VOLTAGE</b>           | 12/24 VDC                                 |
| <b>CURRENT DRAW</b>      | 540 mA/12 VDC; 270 mA/24 VDC              |
| <b>MODE</b>              | Field reversible fail-safe or fail-secure |
| <b>STATIC STRENGTH</b>   | 1500 LB (680 KG)                          |
| <b>DYNAMIC STRENGTH</b>  | 70 ft-lbs (9.68 m-kgs)                    |
| <b>HOUSING THICKNESS</b> | 1/2" (13 mm)                              |
| <b>OPERATING TEMP.</b>   | 14°F to 120°F (-10°C~+49°C)               |
| <b>HUMIDITY</b>          | 0~85% non-condensing                      |
| <b>DIMENSION</b>         | 8" x 1 3/4" x 1/2"                        |

### WIRING DIAGRAMS

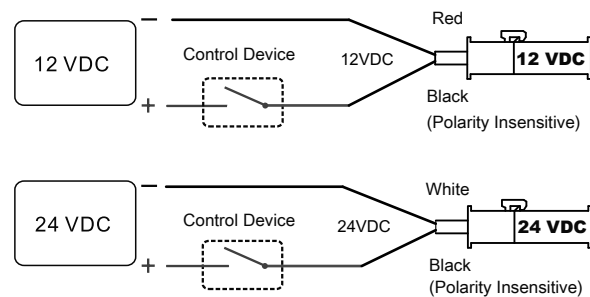

### CHANGING FAIL-SAFE/FAIL-SECURE

Remove screw #1, loosen, slide and tighten screw #2. Tighten screw #1 to the proper position Fail-secure or Fail-safe.

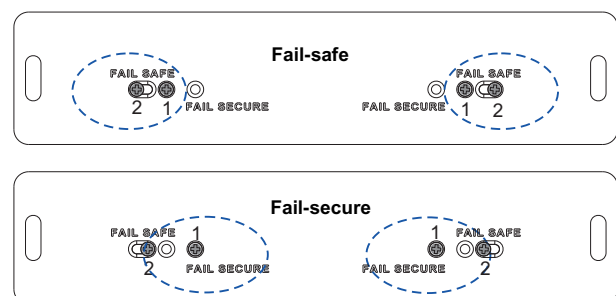

# 9200 SERIES

9200 SPDT key switches are compatible with standard architectural size cylinders. Complete with durable and tamper-resistant 1/4" thick aluminum cover plates and are supplied with 2 snake eyes security screws and wrench.

## STANDARD FEATURES

- **Standard Plate (4 3/4" x 3" x 1/4")**
- **Narrow Plate (4 3/4" x 1 5/8" x 1/4")**
- Cylinders are not included
- Please Specify Finish: US28 (aluminum) or US40 (dark anodized bronze)



ROFU 9200 STANDARD US28 & US40

## SPECIFICATION

| MODELS        | Description              | Mode       | Rating            | Function |
|---------------|--------------------------|------------|-------------------|----------|
| <b>9200</b>   | Key Switch               | Momentary  | 10A/250V-15A/125V | SPDT     |
| <b>9200-2</b> | 2 Key Switches (1 Plate) | Momentary  | 10A/250V-15A/125V | SPDT     |
| <b>9201</b>   | Key Switch w/LED         | Momentary  | 10A/250V-15A/125V | SPDT     |
| <b>9202</b>   | Key Switch w/Pneumatic   | Time Delay | 10A/250V-15A/125V | SPDT     |
| <b>9210</b>   | Key Switch               | Maintained | 10A/250V-15A/125V | SPDT     |
| <b>9211</b>   | Key Switch w/LED         | Maintained | 10A/250V-15A/125V | SPDT     |



ROFU 9220 NARROW US28 & US40

## HARDWARE KIT FEATURES

- Unique switch bracket design provides adjustment capability for the switch to accept standard straight cams or clover cams with either 1 1/8" or 1 1/4" cylinder length
- Cylinder locking ring included
- Pinch-on wire connectors - no soldering is required

## OPTIONAL FEATURES

- Optional Bi-Colored LED for On/ Off Position.
- Time Delay: Pneumatic Time Delay (**9969**)  
Adjustable between 2~60 seconds  
Rating: 10 A/125~250 VAC

## SPECIFICATION

| MODEL       | Description            | Mode       | Rating            | Function |
|-------------|------------------------|------------|-------------------|----------|
| <b>9220</b> | Key Switch             | Momentary  | 10A/250V-15A/125V | SPDT     |
| <b>9221</b> | Key Switch w/LED       | Momentary  | 10A/250V-15A/125V | SPDT     |
| <b>9222</b> | Key Switch w/Pneumatic | Time Delay | 10A/250V-15A/125V | SPDT     |
| <b>9230</b> | Key Switch             | Maintained | 10A/250V-15A/125V | SPDT     |
| <b>9231</b> | Key Switch w/LED       | Maintained | 10A/250V-15A/125V | SPDT     |

ELECTROMAGNETS

ELECTRIC STRIKES

EXIT DEVICES


MISC. ACCESS CONTROL

## 9300 SERIES

9300 REX switches are blue colored DPDT push buttons with durable and tamper-resistant 1/4" thick aluminum cover plates. All are supplied with 2 snake eyes security screws and wrench.

### STANDARD FEATURES

- **Standard Plate (4 3/4" x 3" x 1/4")**
- **Narrow Plate (4 3/4" x 1 5/8" x 1/4")**
- UL Recognized Components.
- Blue Colored Push Button
- Please Specify Finish: US28 (aluminum) or US40 (dark anodized bronze)

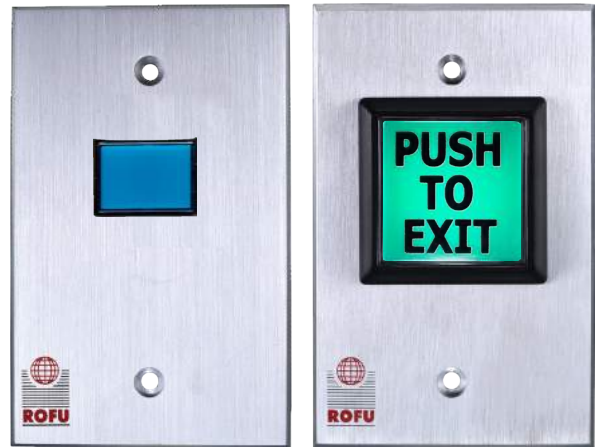

ROFU 9300 & 9350 STANDARD US28

### SPECIFICATION

| MODELS      | DESCRIPTION              | MODE              | RATING      | FUNCTION |
|-------------|--------------------------|-------------------|-------------|----------|
| <b>9300</b> | Single Push Button       | Momentary         | 0.5A/250VAC | DPDT     |
| <b>9301</b> | Double Push Button       | Momentary         | 0.5A/250VAC | DPDT     |
| <b>9302</b> | Triple Push Button       | Momentary         | 0.5A/250VAC | DPDT     |
| <b>9303</b> | Single Push Button       | Time Delay (9965) | 0.5A/250VAC | DPDT     |
| <b>9310</b> | Single Push Button       | Maintained        | 0.5A/250VAC | DPDT     |
| <b>9350</b> | Illuminated w/ 9 Inserts |                   |             |          |



### OPTIONAL FEATURES

- Time Delay: Electronic Time Delay adjustable relocking time 1~30 seconds
- LED Indicator for On/Off Position (specify per optional parts below)
- Optional Push Button Colors: (please specify) Red for MOM, or Red, Orange and Green for MAIN

### 9300 OPTIONAL PARTS

| PARTS        | DESCRIPTION                            |
|--------------|----------------------------------------|
| <b>9990i</b> | 12V Light Bulb for Momentary Switches  |
| <b>9990e</b> | 12V Light Bulb for Maintained Switches |
| <b>9991i</b> | 24V Light Bulb for Momentary Switches  |
| <b>9991e</b> | 24V Light Bulb for Maintained Switches |

### SPECIFICATION

| MODELS      | DESCRIPTION              | MODE       | RATING      | FUNCTION |
|-------------|--------------------------|------------|-------------|----------|
| <b>9320</b> | Single Push Button       | Momentary  | 0.5A/250VAC | DPDT     |
| <b>9321</b> | Double Push Button       | Momentary  | 0.5A/250VAC | DPDT     |
| <b>9322</b> | Triple Push Button       | Momentary  | 0.5A/250VAC | DPDT     |
| <b>9323</b> | Single Push Button       | Time Delay | 0.5A/250VAC | DPDT     |
| <b>9330</b> | Single Push Button       | Maintained | 12/24VDC    | DPDT     |
| <b>9370</b> | Illuminated w/ 9 Inserts | Momentary  |             |          |



# 9400 SERIES

9400 REX switches feature 1 1/2" red mushroom buttons with durable and tamper-resistant, 1/4" thick aluminum cover plates. All are supplied with 2 snake eyes security screws and wrench.

## STANDARD FEATURES

- **Standard Plate (4 3/4" x 3" x 1/4")**
- **Narrow Plate (4 3/4" x 1 5/8" x 1/4")**
- UL Recognized Components.
- Rating: 3A/240V
- Please Specify Finish: US28 (aluminum) or US40 (dark anodized bronze)



**ROFU 9400 STANDARD US28 & US40**

## SPECIFICATION

| MODELS      | DESCRIPTION         | MODE          | RATING  | FUNCTION |
|-------------|---------------------|---------------|---------|----------|
| <b>9400</b> | 1 1/2" Mushroom Cap | NO-Momentary  | 3A/240V | SPDT     |
| <b>9401</b> | 1 1/2" Mushroom Cap | NC-Momentary  | 3A/240V | SPDT     |
| <b>9410</b> | 1 1/2" Mushroom Cap | NO-Maintained | 3A/240V | SPDT     |
| <b>9411</b> | 1 1/2" Mushroom Cap | NC-Maintained | 3A/240V | SPDT     |



**ROFU 9400 NARROW US28 & US40**

## SPECIFICATION

| MODELS      | DESCRIPTION         | MODE          | RATING  | FUNCTION |
|-------------|---------------------|---------------|---------|----------|
| <b>9420</b> | 1 1/2" Mushroom Cap | NO-Momentary  | 3A/240V | SPDT     |
| <b>9421</b> | 1 1/2" Mushroom Cap | NC-Momentary  | 3A/240V | SPDT     |
| <b>9430</b> | 1 1/2" Mushroom Cap | NO-Maintained | 3A/240V | SPDT     |
| <b>9431</b> | 1 1/2" Mushroom Cap | NC-Maintained | 3A/240V | SPDT     |

## 9400 OPTIONAL PARTS

| PARTS       | DESCRIPTION                                                                                |
|-------------|--------------------------------------------------------------------------------------------|
| <b>9959</b> | Pneumatic Time Delay<br>Adjustable relocking time 2~60 seconds<br>Rating: 10 A/120~240 VAC |

ELECTROMAGNETS

ELECTRIC STRIKES

EXIT DEVICES

MISC. ACCESS CONTROL



## 9600 SERIES

9600 REX switches feature 2 3/8" red mushroom buttons with durable and tamper-resistant, 1/4" thick aluminum cover plates. All are supplied with 2 snake eyes security screws and wrench.

### STANDARD FEATURES

- **Standard Plate (4 3/4" x 3" x 1/4")**
- **Narrow Plate (4 3/4" x 1 5/8" x 1/4")**
- UL Recognized Components.
- Rating: 3A/240V
- Please Specify Finish: US28 (aluminum) or US40 (dark anodized bronze)



**ROFU 9600 STANDARD US28 & US40**

### SPECIFICATION

| MODELS         | DESCRIPTION         | MODE            | RATING  | FUNCTION |
|----------------|---------------------|-----------------|---------|----------|
| <b>9600</b>    | 2 3/8" Mushroom Cap | NO-Momentary    | 3A/240V | SPST     |
| <b>9601</b>    | 2 3/8" Mushroom Cap | NC-Momentary    | 3A/240V | SPST     |
| <b>9600-01</b> | 2 3/8" Mushroom Cap | NO/NC-Momentary | 3A/240V | SPST     |



**ROFU 9620 NARROW US28 & US40**

### 9600 OPTIONAL PARTS

| PARTS       | DESCRIPTION                                                                                |
|-------------|--------------------------------------------------------------------------------------------|
| <b>9959</b> | Pneumatic Time Delay<br>Adjustable relocking time 2~60 seconds<br>Rating: 10 A/120~240 VAC |

### SPECIFICATION

| MODELS      | DESCRIPTION         | MODE         | RATING  | FUNCTION |
|-------------|---------------------|--------------|---------|----------|
| <b>9620</b> | 2 3/8" Mushroom Cap | NO-Momentary | 3A/240V | SPST     |
| <b>9621</b> | 2 3/8" Mushroom Cap | NC-Momentary | 3A/240V | SPST     |

## 9700 SERIES

9700 REX switches feature 1 1/4" red flush head SPST with metal surround and, and tamper-resistant 1/4" thick aluminum cover plates. All are supplied with 2 snake eyes security screws and wrench.

### STANDARD SIZE FEATURES

- **Standard Plate (4 3/4" x 3" x 1/4")**
- **Narrow Plate (4 3/4" x 1 5/8" x 1/4")**
- UL Recognized Components.
- Rating: 3A/240V
- Please Specify Finish: US28 (aluminum) or US40 (dark anodized bronze)



**ROFU 9700 STANDARD US28 & US40**

### SPECIFICATION

| MODELS      | DESCRIPTION         | MODE         | RATING  | FUNCTION |
|-------------|---------------------|--------------|---------|----------|
| <b>9700</b> | Metallic Flush Head | NO-Momentary | 3A/240V | SPST     |
| <b>9701</b> | Metallic Flush Head | NC-Momentary | 3A/240V | SPST     |



**ROFU 9700 NARROW US28 & US40**

### 9700 OPTIONAL PARTS

| PARTS       | DESCRIPTION                                                                                |
|-------------|--------------------------------------------------------------------------------------------|
| <b>9959</b> | Pneumatic Time Delay<br>Adjustable relocking time 2~60 seconds<br>Rating: 10 A/120~240 VAC |

### SPECIFICATION

| MODELS      | DESCRIPTION         | MODE         | RATING  | FUNCTION |
|-------------|---------------------|--------------|---------|----------|
| <b>9720</b> | Metallic Flush Head | NO-Momentary | 3A/240V | SPST     |
| <b>9721</b> | Metallic Flush Head | NC-Momentary | 3A/240V | SPST     |

### 9800


9800 Infrared Sensor Exit Button is a dual-LED illuminated, wave-to-exit device that can directly control electromagnets or electric strikes.

#### STANDARD FEATURES

- Standard plate, aluminum alloy finish
- No touch, wave-to-exit
- Dual-LED indicating door status
- Low current draw (40 mA/15 mA)
- Rating: 3 A/12~28 VDC

#### SPECIFICATION

|                        |                                  |                     |                                |
|------------------------|----------------------------------|---------------------|--------------------------------|
| <b>DEMSIONS</b>        | 4 3/4" (L) x 3" (W) x 1 3/4" (D) | <b>RELAY RATING</b> | 3 A/12~28 VDC                  |
| <b>SENSOR RANGE</b>    | 0.1 - 10 cm                      | <b>CONTACTS</b>     | NO/COM/NC                      |
| <b>OPERATING TEMP.</b> | -20~+55°C (-4°F~+131°F)          | <b>LED COLORS</b>   | Standby (Blue), Active (Green) |
| <b>VOLTAGE</b>         | 12 VDC                           | <b>CURRENT DRAW</b> | Pull in 40 mA; Holding 15 mA   |

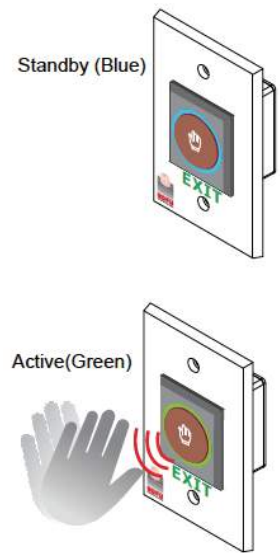

### 9860

9860 Standalone Proximity Reader is a keypad and RFID reader device, completes with ROFU 9126T plug-in mini power supply. 9860 has 2 LEDs with 4 colors, a built-in buzzer and can be programmed to relock after 1~99 seconds.

#### STANDARD FEATURES

- Weatherproof (IP65) keypad
- Tamper proof keypad lockout
- Store up to 1,000 user, 4-6 digit PIN
- 3 access modes:
  - User card only
  - User PIN only
  - User card & PIN combination

#### SPECIFICATION

|                        |                                         |                         |                                                                               |
|------------------------|-----------------------------------------|-------------------------|-------------------------------------------------------------------------------|
| <b>DEMSIONS</b>        | 6 1/8" (L) x 1 3/4" (W) x 5/8" (D)      | <b>TRANS. FREQUENCY</b> | EM 125Kz                                                                      |
| <b>CONTACTS</b>        | 1 electronic switch, NO/COM dry contact | <b>SENSOR DIST.</b>     | 1 9/16" (40 mm)                                                               |
| <b>OPERATING TEMP.</b> | -20~+55°C (-4°F~+131°F)                 | <b>LED COLORS</b>       | Blue/Green/Yellow/Red                                                         |
| <b>VOLTAGE</b>         | 12~24 VAC/VDC                           | <b>CURRENT DRAW</b>     | Active: 120 mA; Standby: 70 mA/12 VDC<br>Active: 80 mA; Standby: 50 mA/24 VDC |

# 9500 SERIES

9500 Series Micro-Switch Bar is a non-latching push bar, designed to be installed on emergency doors to release magnetic locks.

The 9500-36DE Delayed-Egress Micro-Switch Bar can be programmed to release the magnetic lock after 15 or 30 seconds



## STANDARD FEATURES

- Heavy duty aluminum (US28) cover
- 34 1/2" in length, designed for 36" doors
- Double pole micro-switch output
- Special key to lock the push bar in closed or open position

## 9500 SERIES MODELS & PARTS

| MODELS               | DESCRIPTION                          | MODELS            | DESCRIPTION                             |
|----------------------|--------------------------------------|-------------------|-----------------------------------------|
| <b>9500-36</b>       | Micro-Switch Bar US28                | <b>9500XPCB</b>   | Replacement PC Board                    |
| <b>9500-36 Black</b> | Micro-Switch Bar in Black            | <b>9500 Cover</b> | Replacement Top Cover                   |
| <b>9500-36DE</b>     | Micro-Switch Bar with Delayed Egress | <b>9500X99</b>    | Replacement End Caps Set (Top & Bottom) |

## SPECIFICATION (9500-36)

|                 |                             |                      |             |
|-----------------|-----------------------------|----------------------|-------------|
| <b>DEMSIONS</b> | 34 1/2" x 2 11/16" x 2 1/4" | <b>SWITCH RATING</b> | 5 A/125 VAC |
| <b>VOLTAGE</b>  | 12/24 VDC                   | <b>CONTACTS</b>      | NO/COM/NC   |

ELECTROMAGNETS

ELECTRIC STRIKES

EXIT DEVICES

MISC. ACCESS CONTROL


## 2960

### STANDARD FEATURES


- Field reversible: fail-safe or fail-secure
- Dual voltage 12/24 VDC field selectable
- Stainless steel faceplate
- Suitable for narrow frames
- Changeable nib to suit single or double swing doors
- Can be installed in horizontal or vertical position
- Tested to 1,000,000 cycles

### SPECIFICATION


|                        |                                                    |
|------------------------|----------------------------------------------------|
| <b>VOLTAGE</b>         | 12/24 VDC                                          |
| <b>CURRENT DRAW</b>    | 280 mA/12 VDC, 140 mA/24 VDC                       |
| <b>LOCK MONITORING</b> | SPDT rated 3 A/125 VAC                             |
| <b>DIMENSION</b>       | 8 1/4" x 1" x 1 3/4"<br>5 15/16" x 1 3/16" x 1/16" |
| <b>OPERATING TEMP.</b> | 14°F to 113°F (-10°C~+45°C)                        |



OUTSWING



INSWING



DOUBLESWING



## 3810

### STANDARD FEATURES

- Field reversible: fail-safe or fail-secure
- Dual voltage 12/24 VDC field selectable
- Door/drawer position monitoring, with built-in reed switch bolt monitoring

### SPECIFICATION

|                      |                                       |
|----------------------|---------------------------------------|
| <b>VOLTAGE</b>       | 12/24 VDC                             |
| <b>CURRENT DRAW</b>  | 300 mA/12 VDC, 150 mA/24 VDC          |
| <b>DIMENSION</b>     | 3 3/16" (H) x 1 1/8" (W) x 1 1/8" (D) |
| <b>HOLDING FORCE</b> | 500 LB                                |



# 3820

## APPLICATIONS

- Fail-secure operation
- Surface & side mount compact electric lock, suitable for cabinets and gym lockers.
- Motor operated, low energy consumption
- Stainless steel locking pin assembly
- Field adjustable relock time delay
- Lock or door status monitoring

## SPECIFICATION

|                     |                                                                             |
|---------------------|-----------------------------------------------------------------------------|
| <b>VOLTAGE</b>      | 12 ~ 28 VAC/VDC                                                             |
| <b>CURRENT DRAW</b> | Standby: 69 mA/12 VDC, 69 mA/24 VDC<br>Active: 165 mA/12 VDC, 165 mA/24 VDC |
| <b>MODE</b>         | Fail secure                                                                 |
| <b>OPERATION</b>    | Motor                                                                       |
| <b>DIMENSION</b>    | 2 3/8" (L) x 2 3/8" (W) x 7/8" (H)<br>2 3/8" (L) x 13/16" (W) x 1/4" (H)    |



ELECTROMAGNETS

ELECTRIC STRIKES


# 3850

## FUNCTION

- Fail-safe operation
- Magnetic bolt status output
- Relock time delay (0/3/6/9 seconds)
- Built-in logical circuitry and door position sensor
- Can be installed in horizontal or vertical position
- Net weight: 1.2 KG
- Tested to 500,000 cycles

## SPECIFICATION


|                        |                                                                           |
|------------------------|---------------------------------------------------------------------------|
| <b>VOLTAGE</b>         | 12 VDC                                                                    |
| <b>CURRENT DRAW</b>    | Pull in: 0.9 A ; Holding: 0.3 A                                           |
| <b>DIMENSION</b>       | 8" (L) x 11/2" (W) x 1 9/16" (D)<br>8 15/16" (L) x 11/16" (W) x 11/8" (D) |
| <b>OPERATING TEMP.</b> | 14°F to 113°F (-10°C~+45°C)                                               |
| <b>BOLT MONITORING</b> | SPDT rated 0.25 A/30 VDC                                                  |



OUTSWING



INSWING



DOUBLESWING

EXIT DEVICES

MISC. ACCESS CONTROL



### CONVERTERS / MISC. ACCESSORIES

ELECTROMAGNETS

ELECTRIC STRIKES

EXIT DEVICES


MISC. ACCESS CONTROL



**1010**  
Momentary Rocker Switch  
Designed to Mount Under a Desk




**9000**  
Electric Buzzer, Rated for 7~30 VDC



**1005**  
Full Wave Bridge Rectifier, Converts AC to DC (up to 10A)  
**1006**  
Full Wave Bridge Rectifier with 6" Leads




**9149B**  
Inline Controller with Buzzer,  
Drops from 12~24 VAC/VDC to 12 VDC, 1A

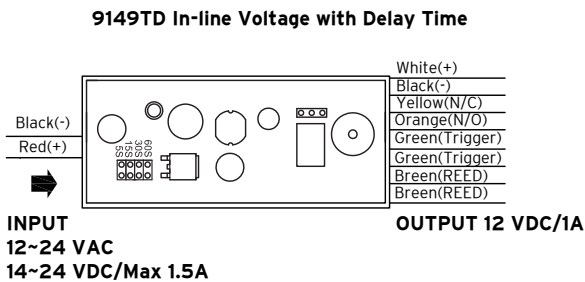

**9149TD**  
Inline Controller with Buzzer and Time Delays  
(5/15/320/60s)



**1004**  
Full Wave Bridge Rectifier

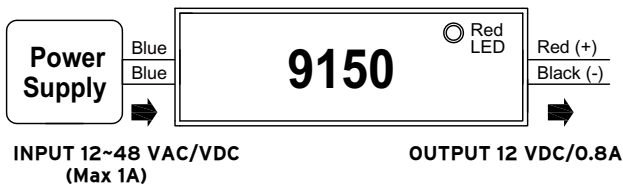

**9150**  
Inline Controller, drops from up to 48 VAC to 12 VDC



**9126T**  
Plug In Mini Power Supply, 12 VDC / 1.5A with Time Delay

### MINI PLUG IN POWER SUPPLY

| MODEL      | 9126T                            |
|------------|----------------------------------|
| INPUT      | 100~240 VAC, 50/60 Hz            |
| OUTPUTS    | 1) 12 VDC, 1.5A 2) 12 VDC, 1.0A  |
| TIME DELAY | 0~45 seconds                     |
| DIMENSION  | 2 7/8" (L) X 5 1/16"(W) x 2" (D) |

### TRANSFORMERS / POWER SUPPLY UNITS



### POWER TRANSFERS

| MODELS    | 10305-LA                               | 10306-LA |
|-----------|----------------------------------------|----------|
| CONTACT   | 2 PIN                                  | 3 PIN    |
| RATING    | 1.5 A/42 V                             |          |
| DIMENSION | 71(L)x13(W)x8(D) 71(L)x13(W)x27mm(D)   |          |
| USE       | Power transfer from frame to door leaf |          |

### VAC PLUG IN TRANSFORMERS

| MODELS   | 9112             | 9116            | 9124             |
|----------|------------------|-----------------|------------------|
| INPUT    | 120 VAC/ 60 Hz   |                 |                  |
| OUTPUT   | 12 VAC<br>1.25 A | 16 VAC<br>0.8 A | 24 VAC<br>0.42 A |
| UL Class | Class 2          |                 |                  |



### VDC PLUG IN TRANSFORMERS

| MODELS   | 9112D                 | 9124D        |
|----------|-----------------------|--------------|
| INPUT    | 100~240 VAC, 50~60 Hz |              |
| OUTPUT   | 12 VDC, 1.1A          | 24 VDC, 1.1A |
| UL Class | Class 2               |              |

### POWER SUPPLY

| MODELS     | 9102-12D UL                        | 9102-24D     |
|------------|------------------------------------|--------------|
| INPUT      | 110 VAC/60 Hz                      |              |
| OUTPUT     | 12 VDC, 2.0A                       | 24 VDC, 1.0A |
| UL Listing | UL Listed                          |              |
| DIMENSION  | 8 7/16"(L) x 8 7/8"(W) x 3 1/8"(D) |              |




ELECTROMAGNETS

ELECTRIC STRIKES


EXIT DEVICES

MISC. ACCESS CONTROL


## DOOR CORDS

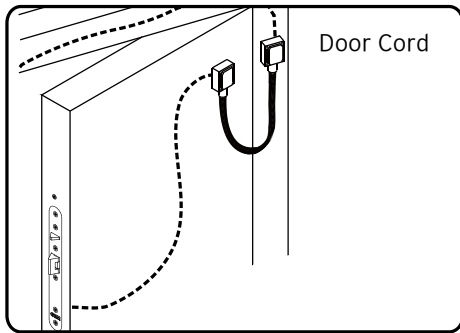


The door cord protects the wiring from damage at the door hinge.



### Wiring Diagram

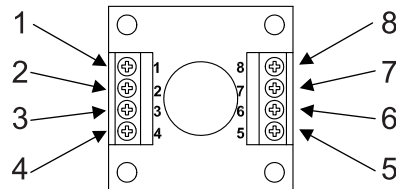

### 10320HD PCB

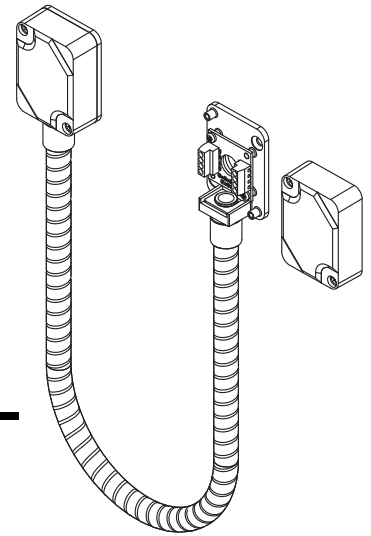

**10318**  
16" Door Cord, 5/16" Inside Diameter



**10318-7**  
7 1/4" Door Cord, 1/4" Inside Diameter



**10320HD US28**  
Heavy Duty Stainless Steel Door Cord (US28)



**10320HD US40**  
Heavy Duty Stainless Steel Door Cord (US40)



**10320HD PCB US28**  
Heavy Duty Stainless Steel Door Cord with PC Board (US28)



**10320HD PCB US40**  
Heavy Duty Stainless Steel Door Cord with PC Board (US40)

- **Credit Terms**

Credit terms are net thirty (30) days from date of invoice to customers with approved credit. Interest at the rate of 1.5% per month (APR 18%) may be charged on all past due accounts. In the event of failure to pay any amount due ROFU® Security International Corporation, all collection costs and/or attorney's fees incurred in attempts to collect any such amounts shall be paid by customer.

- **Title / Liability**

Title passes to the customer upon delivery of merchandise to the carrier. Loss and/or damage claims must be filed with the delivering carrier within 48 hours of delivery. Packaging and packing material must be retained for use with the claims.

- **Return of Defective Items**

A Return Authorization Number (RA#) must be obtained from ROFU® before any item(s) can be returned. The original invoice number and purchase order number is required for all returns. Additional information may be required and will be determined at the time of the request. The RA# must be clearly marked on the outside of the box. Customer must prepay shipping charges and insurance on all returned items. The RA# is valid for 30 days after authorization. Once received by ROFU the returned items will be evaluated and either repaired (if possible) or replaced (when necessary) and shipped back to the customer. If it is determined that there is no defect or that the defect is the cause of misuse or damage caused after sale, the item(s) will be returned as-is. No credits will be issued for defective returns.

- **Return of Unused Items for Credit**

All new/unused items returned for credit must be done within 90 days of purchase. The original invoice and purchase order number is required for all returns. The minimum restocking fee is 30%; additional fees may apply and will be determined upon evaluation. Items returned must be in brand-new, unused and re-sellable condition or credit will not be issued.

- **Special Order Returns**

Return of Special or Customized Orders will not be authorized. These include, but are not limited to, special finishes or modifications that alter the original interior or exterior of the item(s).

- **Credit Balance**

All credits issued will result in a credit balance on a customer's account and must be used as credit against future purchases. No check will be issued to pay off a credit balance.

- **Minimum Orders**

A handling fee of \$20.00 will be added to all orders under \$100.00.

- **Product Change**

ROFU® reserves the right to discontinue and/or make modifications to any of its products at any time without notice and without incurring any obligations on models built prior to the change. ROFU® will do our best to inform of any major changes at the time a purchase order is received.

- **Pricing**

ROFU® reserves the right to change pricing on any item(s) without prior notice. Orders will be billed at the prices in effect at the time of shipment, except when a valid written quote is in place.

- **Quotes**

All requests for quotation of price and availability of products will be issued a written quote and remain in effect for 15 days.

- **Deliveries**

Delivery times is based on our best estimate, and can not be guaranteed or legally binding.

- **Trademark**

ROFU® is a registered trademark of ROFU® Security International Corporation in many countries and may not be used without the prior written consent of ROFU® Security International Corporation.

**ROFU® Electromagnetic Lock Limited Lifetime Warranty / ROFU Electric Strike Warranty**

ROFU® Security International Corporation warrants its products to be free from defects in material and workmanship when they have been installed in accordance with ROFU's® instructions and maintained and used and not been modified or tampered with. ROFU® Security International Corporation does not assume any responsibility for damage to persons or property due to improper care, installation, storage, abuse, or acts of God. This warranty is limited to the original purchaser and is not transferable.

ROFU's® liability is limited to the repair or at ROFU's® option the replacement of the defective product or part thereof, providing said products are used within the specified ratings and applied in accordance with good engineering practice, and said products are proved by our examination to be defective and returned to us transportation prepaid. Any repaired or replaced product shall be warranted to the original purchaser only for the duration of the un-expired portion of the original warranty. ROFU® shall in no event be liable whether in contract, tort, or negligence for any direct, indirect, in contract, special, incidental, economic, consequential or collateral damages of any kind sustained from any cause. ROFU® is not responsible for any charges incurred for field service or installation. This warranty does not extend to any of our products which have been subject to misuse, neglect, accident, improper application or installation, nor shall it extend to material which has been altered or repaid outside the factory.

**ROFU® ELECTROMAGNETIC LOCK LIMITED LIFETIME WARRANTY:** ROFU® warrants only to the end user of the electromagnetic locks that the magnetic lock will be free from defects in material and workmanship for the lifetime of such electromagnetic lock from the date of shipment.

**ROFU® PC BOARD WARRANTY:** ROFU® warrants only to the end user of electromagnetic locks that the PC Board will be free from defects in material and workmanship for a period of three years from the date of shipment. PC Board of delayed egress electromagnets are covered by a one-year warranty.

**ROFU® ELECTRIC STRIKE & ACCESSORIES WARRANTY:** ROFU's® warranty shall expire three years from the date of shipment for all electric strikes (except for 1500 Series Strikes) and one year from the date of shipment for 1500 Series Strikes and all other catalog items and for electronic components.

As a condition for the performance of this warranty, a purchaser shall upon first discovery of any claimed defect deliver the subject merchandise or part asserting a claim pursuant to this warranty within 30 days after first discovery of any claimed defect to: ROFU® Security International Corporation. A Return Authorization Number (RA#) must be obtained from ROFU® before product can be returned. To obtain a Return Authorization Number (RA#) contact ROFU® at 800-255-7638.

Correction of defects in the manner and under the conditions stated above shall constitute fulfillment of all our obligations and liabilities to any person with respect to the covered products, whether based on contract, negligence, strict liability or otherwise. No person or entity is authorized to create on behalf of ROFU® any other obligation or liability to any person relating to the covered products.

ROFU® shall not be liable to the purchaser or anyone else for damages, including but not limited to consequential damages and damages by reason of injury to any person, due to any defect in or malfunction of the product or any part or parts thereof, or for any other reason.

EXCEPT AS STATED ABOVE, ROFU® MAKES NO WARRANTIES WHATSOEVER EITHER EXPRESS OR IMPLIED AS TO ANY MATTER INCLUDING WITHOUT LIMITATION THE CONDITION OF ITS PRODUCTS, THEIR MERCHANTABILITY OR THEIR FITNESS FOR ANY PARTICULAR PURPOSE. DISCLAIMERS / ROFU® POLICIES







**PRODUCT DURABILITY**

**QUALITY**

**TECHNICAL EXPERTISE**

**EXCELLENT CUSTOMER SERVICE**

**10029 South Tacoma Way, Suite E-11  
LAKEWOOD, WA 98499  
P (253) 922-1828  
W [www.ROFU.com](http://www.ROFU.com)  
E [OrderEntry@ROFU.com](mailto:OrderEntry@ROFU.com)**