


RY57 REPLACEMENT BLADE INSTALLATION

There are two Set Screws holding the Blade-
You only have to loosen one Set screw

RY9003 Set Screw

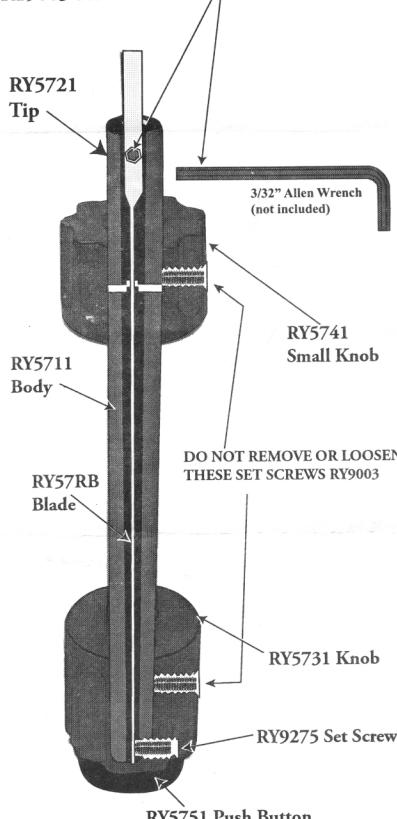

RY57RB Replacement Blade

Remove old Blade and Replace
with new RY57RB Replacement
Blade. Tighten Set Screw with
3/32" Allen Wrench.

Set Screw
3/32" Allen Wrench
(not included)

RY57RB Replacement Blade

Set Screw
TIP Assembly
Release Machine

With Push Button pressed all
the way in-Adjust this TIP
assembly until there is
almost no end play in the
release mechanism. Then
tighten the set screw. Verify
that the TIP assembly
rotates freely with very little
end play in the release
mechanism.

HINT: Press and hold-push
button with your thumb and
use your index fingers to hold
the TIP Assembly in place with
the release mechanism
turned slightly so it cannot
engage and lock. Then tighten
set Screw.

PUSH
Before tightening the Set
screw-Press Push Button
all the way in when adjusting
tip Assembly.

MADE IN U.S.A.