


REVISIONS		DATE
IR	INITIAL RELEASE	10/2010
A	EDIT NOTES & TITLE BLOCK	7/22/2014

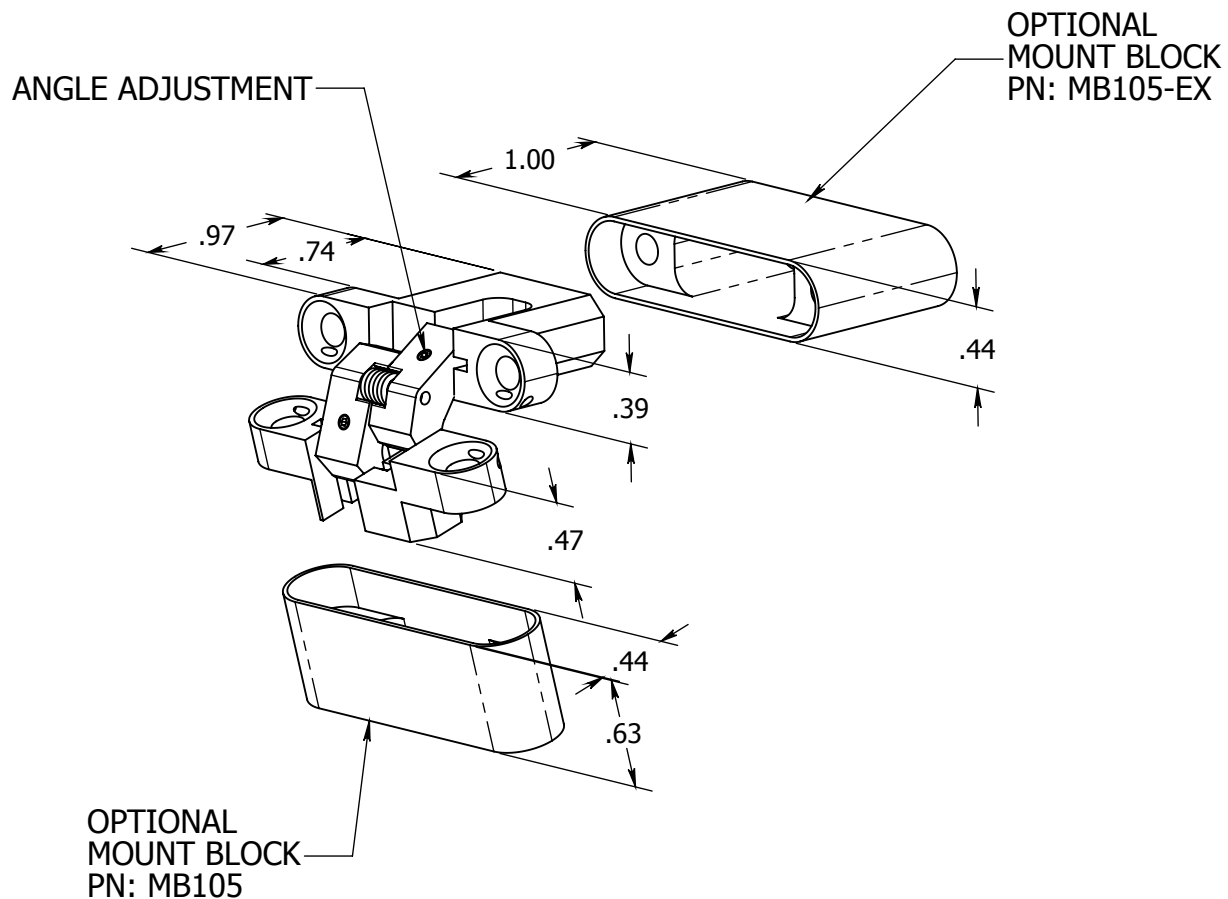

NOTES:

1. USE WITH LIGHTWEIGHT PANELS ONLY
2. DO NOT OPEN PANEL GREATER THAN THE ADJUSTED TRAVEL
3. INSTALL USING NAS514P832 SCREW (4X) OR EQUIV.
4. STANDARD FINISH: BLACK ANODIZE
5. OPTIONAL FINISH: CLEAR ANODIZE
6. USE 0.035" HEX DRIVER TO REDUCE OPEN ANGLE
7. MINIMUM PANEL THICKNESS 0.50"

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SAINT LOUIS DESIGNS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SAINT LOUIS DESIGNS IS PROHIBITED.			UNLESS SPECIFIED OTHERWISE DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: ±1° TWO PLACE DECIMAL ±0.01 THREE PLACE DECIMAL ±0.005 SURFACE FINISH: 32 RMA MATERIAL 7075-T651 QQ-A-225/8 FINISH SEE NOTES DO NOT SCALE DRAWING		NAME	DATE	Saint Louis Designs, Inc. PO BOX 3400, Austin, TX78764 512-472-4711, www.saintlouisdesigns.com		
				DRAWN	MSTL	7/22/2014			
				CHECKED					
				ENG APPR.					
				MFG APPR.	MSTL	7/22/2014			
				Q.A.			SIZE DWG. NO. REV. A SH105-MIX A SCALE:1:1 WEIGHT: SHEET 1 OF 1		
		COMMENTS:							