

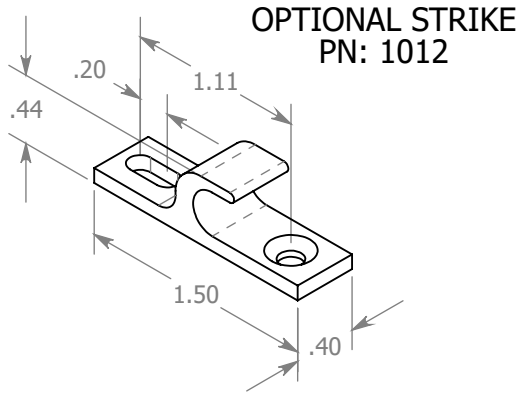


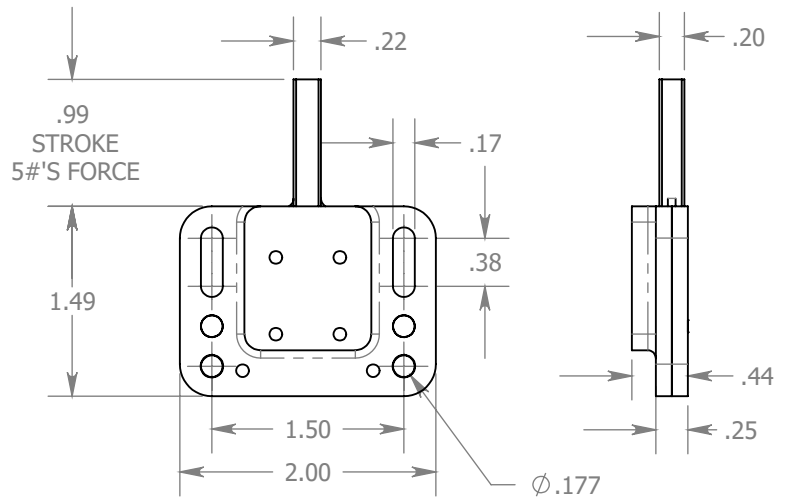


**OPTIONAL MOUNT PLATE
PN: 1156**

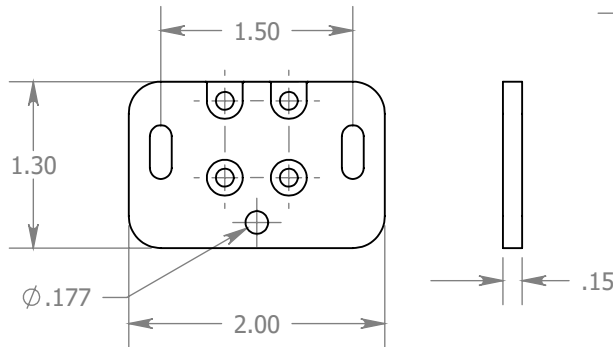


**OPTIONAL
PUSHER MOUNT PLATE
PN: 1170**

NOTES:

1. INSTALL LATCH USING Size #4 SCREWS (2X); e.g. NAS600-9P or equiv for 1170 Mount Plate.
2. 0.06" TRAVEL REQUIRED TO UNLOCK FROM LOCKED POS.
3. LATCH CAN BE USED LEFT OR RIGHT HAND ON MOUNT PLATE.
4. LATCH CAN BE USED WITH OR WITHOUT MOUNT PLATE.
5. LATCH CAN BE INSTALLED BLIND USING #6-32 SCREWS (2X); e.g. NAS601-8P or equiv to 1156 Mount Plate.

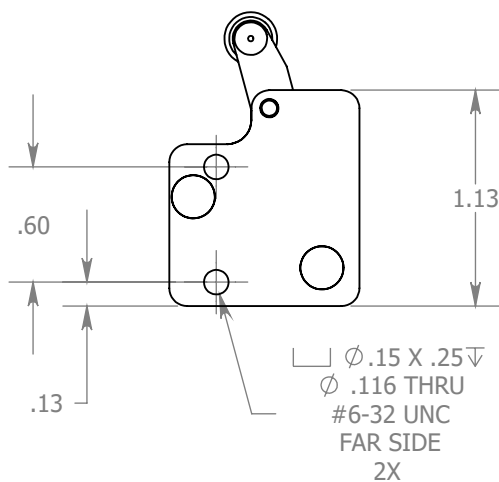

**TOUCH LATCH
PN: TL860**

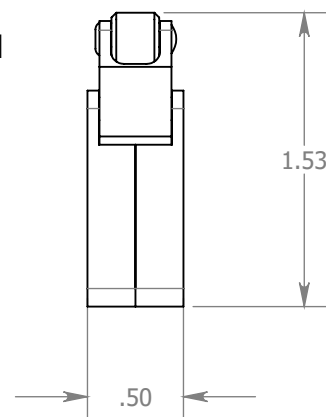

Saint Louis Designs, Inc.

PO BOX 3400, Austin, TX78764
512-472-4711, www.saintlouisdesigns.com

**TOUCH LATCH
LOAD: 225 Lbs**

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SAINT LOUIS DESIGNS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SAINT LOUIS DESIGNS IS PROHIBITED.

DEBUR AND BREAK
SHARP EDGES

UNLESS SPECIFIED OTHERWISE
DIMENSIONS ARE IN INCHES
TOLERANCES:
ANGULAR: $\pm 1^\circ$
TWO PLACE DECIMAL ± 0.01
THREE PLACE DECIMAL ± 0.005
SURFACE FINISH: 32 RMA

MATERIAL 7075-T651
QQ-A-225/8

FINISH BLACK ANODIZE
MIL-A-8625, TYPE 2 CLASS 2

DO NOT SCALE DRAWING

NAME	DATE
DRAWN MSTL	20070705
CHECKED	
ENG APPR.	
MFG APPR.	MSTL 20070705
Q.A.	
COMMENTS:	

SIZE	DWG. NO.	REV.
A	TL860	B
SCALE: 1:1	WEIGHT: 16 GRAMS, LATCH ONLY	SHEET 1 OF 1