




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Saint Louis Designs, Inc. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF Saint Louis Designs, Inc. IS PROHIBITED.

REVISIONS			DATE
IR	INITIAL RELEASE		2/18/2003
A	REDUCED QTY MS20426AD3-8 FROM 3 TO 2		12/16/2004
B	ADDED SHIM (PN: 1010) TO ASSEMBLY		6/20/2005

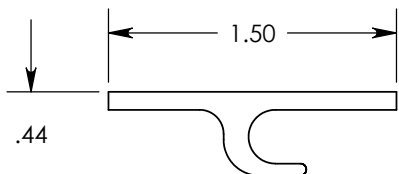

**OPTIONAL
CATCH
PN: 1012**


Ø.14 THRU
✓ Ø.28 X 100°

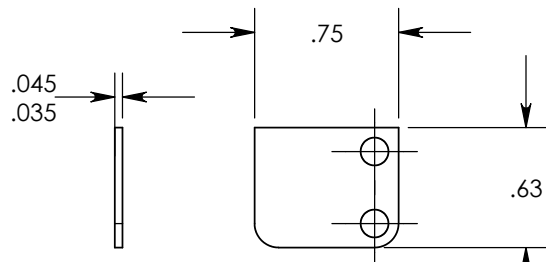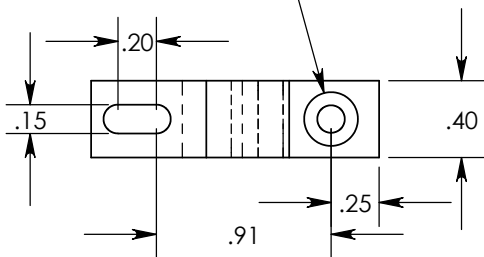


**PROVIDED
SHIM
PN: 1010**

INSTALLATION:




1. ALLOW .156" (5/32") TRAVEL FOR LOCKING AND UNLOCKING.
2. PLACE SHIM PROVIDED BETWEEN LATCH AND MOUNT SURFACE TO PREVENT RIVETS FROM RUBBING MOUNT SURFACE.

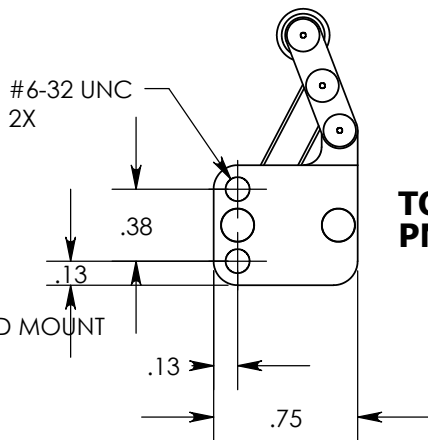

**TOUCH LATCH
PN: TL1000-T**



INSTALL USING SHIM (PN: 1010) UNDER LATCH TO PREVENT RIVET HEADS FROM BINDING, EITHER SIDE.



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

XX = ±.010
XXX = ±.005
ANGULAR = ±1°
SURFACE = 32 RMA OR BETTER

CAD GENERATED DRAWING.
DO NOT MANUALLY UPDATE.

APPROVAL	DATE
DRAWN MSTL	6/20/05
CHECKED	
DO NOT SCALE DRAWING	

Saint Louis Designs, Inc.

P.O. BOX 3400, AUSTIN, TX 78764

(800) 431-6684, st-louis@texas.net

TOUCH LATCH
BLIND INSTALLATION
SHOWN W/ SHIM &
OPTIONAL CATCH

SIZE A PART # TL1000-T

SCALE: CAD FILE: SHEET 1 OF 1