





2

1

OPTIONAL STRIKE **PN: 1012**

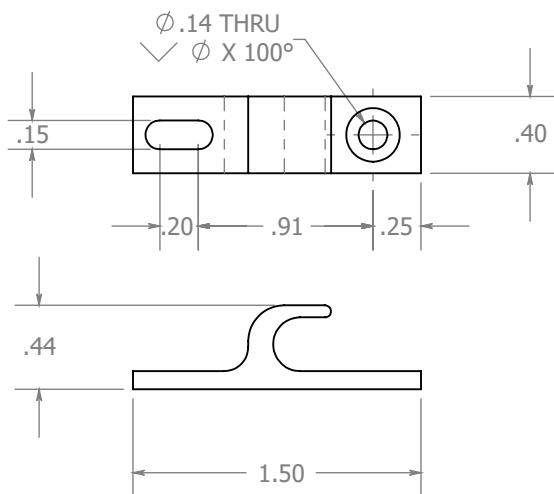

OPTIONAL STRIKE **PN: 1168**

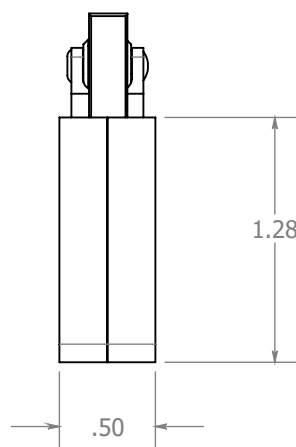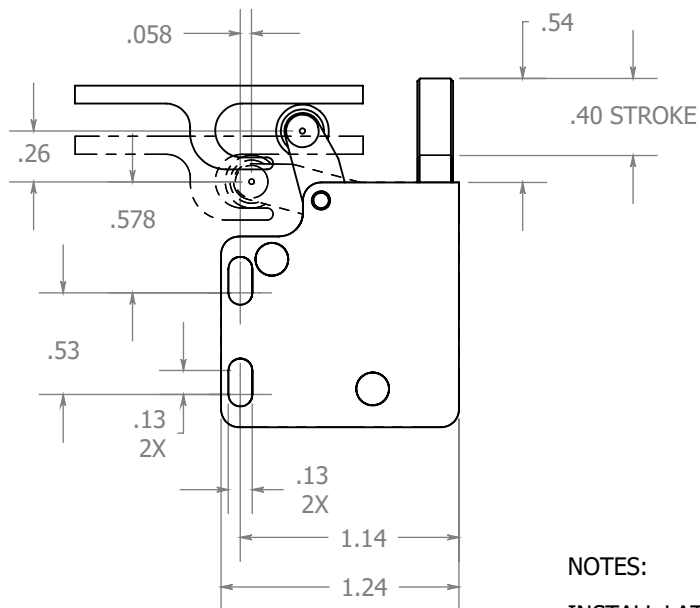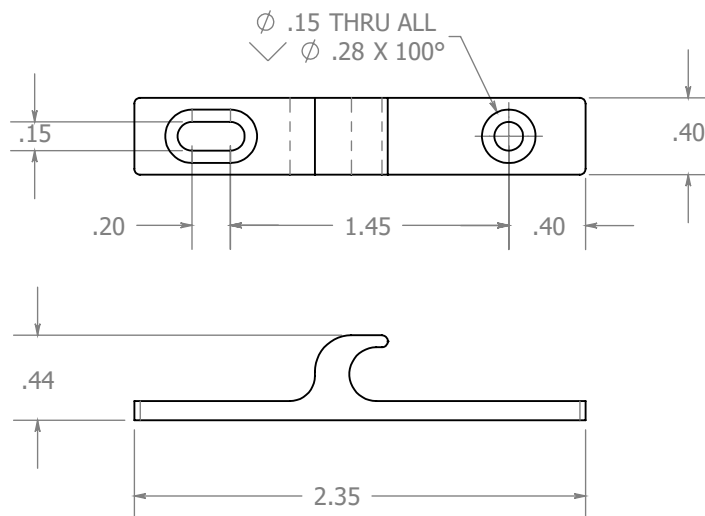

NOTES:

INSTALL LATCH USING NAS601 SCREWS OR EQUIV (2X)
THROUGH LATCH BODY INTO STRUCTURE.

INSTALL OPTIONAL STRIKE USING ONE NAS514-632 SCREW AND
ONE NAS601 SCREW.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN
THIS DRAWING IS THE SOLE
PROPERTY OF SAINT LOUIS DESIGNS.
ANY REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF SAINT LOUIS
DESIGNS IS PROHIBITED.

		UNLESS SPECIFIED OTHERWISE DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH±1° BEND ±3° TWO PLACE DECIMAL ±0.01 THREE PLACE DECIMAL ±0.005	
		MATERIAL AL 7075-T6 QQ-A-225/9	
		FINISH BLACK ANODIZE MIL-A-8625, TYPE 2, CLASS 2	
NEXT ASSY	USED ON		
APPLICATION		DO NOT SCALE DRAWING	

	NAME	DATE
DRAWN	MSTL	20050323
CHECKED		
ENG APPR.		
MFG APPR.	MSTL	20050323
Q.A.		
COMMENTS:		

Saint Louis Designs, Inc.
PO Box 3400, Austin, TX 78764
512-472-4711, www.saintlouisdesigns.com

Touch Latch
w/ integral 5# pusher
Load: 200 Lbs

SIZE A	DWG. NO. TL1166-P INSTALL	REV. B
SCALE: 1:1	WEIGHT: 0.80 oz, Latch Only	SHEET 1 OF 1