






AMERICAN SPECIALTIES, INC.

441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

0332-PL

Effective date: May 05
Supersedes: (all)

Lavatory / Countertop Mounted Liquid Soap Dispenser Repair Kits

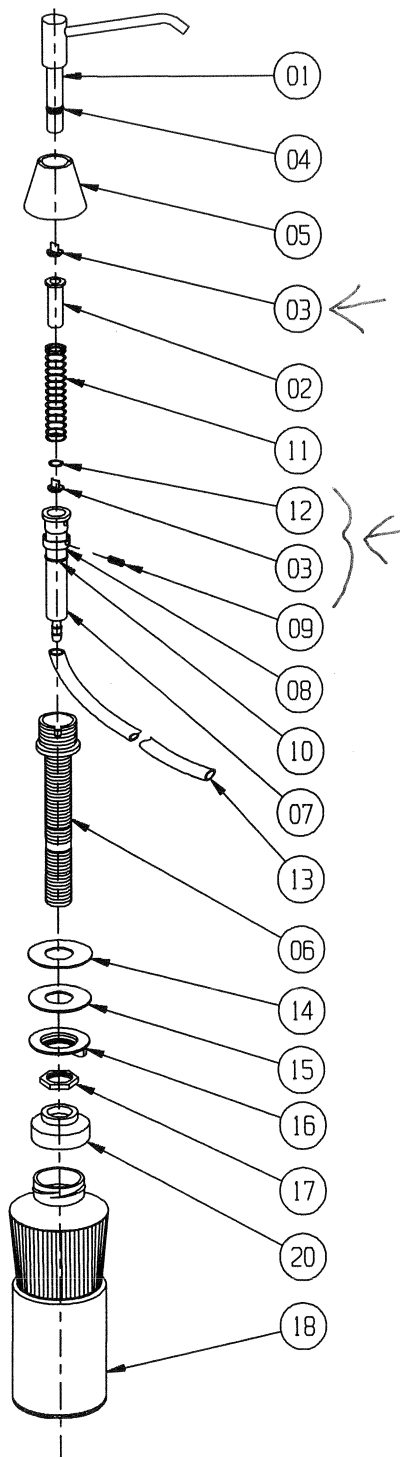

ITEM No.	PART DESCRIPTION
0332-01A	PISTON & SPOUT ASSEMBLY (4"-102mm)
0332-01B	PISTON & SPOUT ASSEMBLY (6"-152mm)
0332-02	PLASTIC SPACER
0332-03	DUCK - BILL CHECK VALVE
0332-04	PISTON 'O' - RING SEAL
0332-05	CHROME PLATED BRASS ESCUTCHEON
0332-06	PLASTIC THREADED SHANK
0332-07	CLEAR PLASTIC CYLINDER
0332-08	STAINLESS STEEL COLLAR
0332-09	STAINLESS STEEL SCREW
0332-10	'O' - RING SEAL
0332-11	MAIN SPRING
0332-12	STAINLESS STEEL WASHER (S)
0332-13	SUPPLY TUBE
0332-14	RUBBER WASHER
0332-15	STAINLESS STEEL WASHER (L)
0332-16	PLASTIC WING NUT
0332-17	PLASTIC HEX LOCK NUT
0332-18	PLASTIC BOTTLE (34 OUNCE - 1 liter)
0332-19	SPANNER WRENCH
0332-20	PLASTIC THREADED BOTTLE CAP (adapter)
0332-21	PLASTIC BOTTLE (20 OUNCE - 592 ml)

REPAIR KITS AVAILABLE

Note: Items in kits (shaded items) NOT available separately

ITEM No.	KIT DESCRIPTION
0332-22	Complete Valve Assembly, 4"(102mm) Spout, includes items 1,2,3,4,5,7,8,9,10,11,12,13.
0332-23	Complete Valve Assembly, 6"(152mm) Spout, includes items 1,2,3,4,5,7,8,9,10,11,12,13.
0332-24	Basin Shank Housing Assembly includes items 6,14,15,16,17.
0332-25	Piston & Spout Assembly 4"(102mm) Spout, includes items 1,4.
0332-26	Piston & Spout Assembly 6"(152mm) Spout, includes items 1,4.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

installation and operation instructions

effective date: May 05
Supersedes: (all)

0332

lavatory /
countertop
liquid soap
dispenser

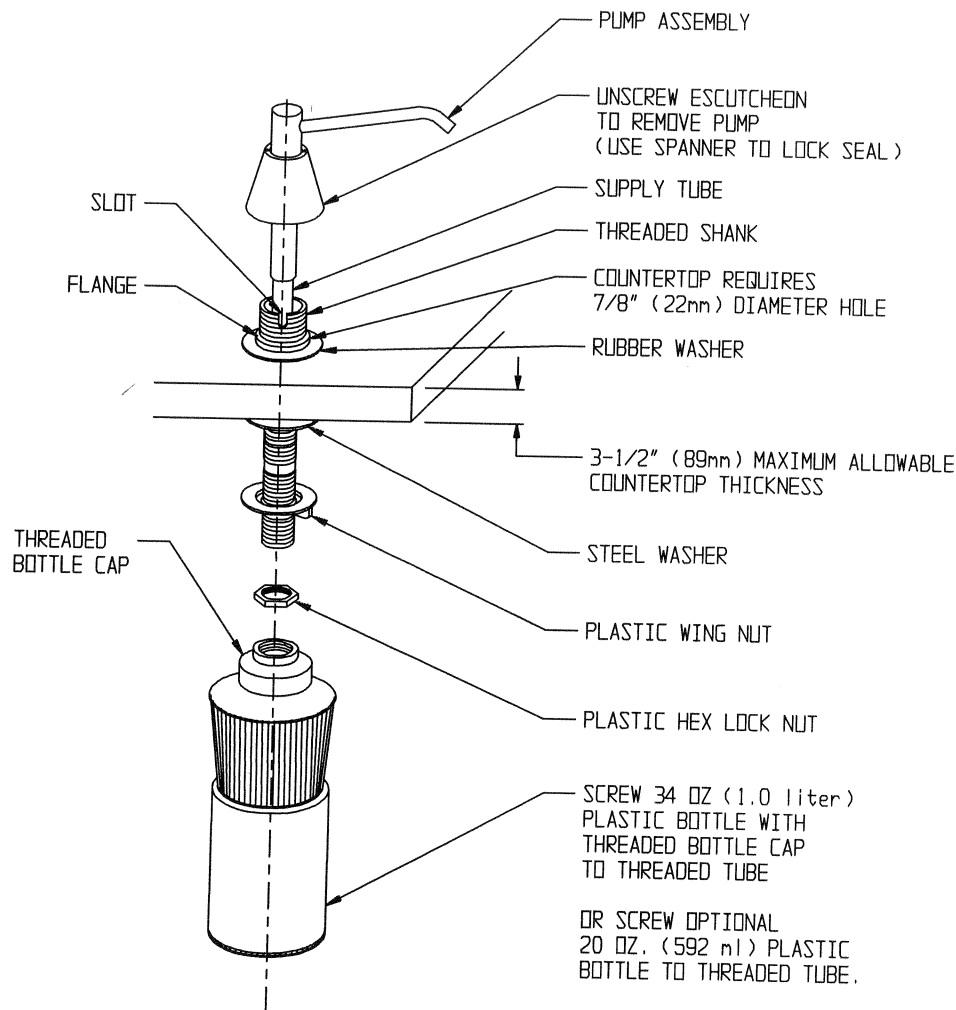

INSTALLATION:

Dispenser requires a 7/8" (22mm) diameter hole through the countertop. Provide clearance below the countertop for 4-1/2" (114mm) diameter x 18" (457mm) container.

Unscrew chrome plated escutcheon from threaded shank in a counterclockwise direction and remove the pump assembly. Slide rubber washer onto the threaded shank under the flange and insert shank into countertop. Install the steel washer and plastic wing nut to the threaded shank. Do not over tighten the wing nut. Install the plastic hex lock nut and the bottle on the threaded shank. Tighten the nut against the bottle neck to lock the bottle in place. Attach supply tube to the pump assembly and insert the pump assembly into the shank. Screw on chrome plated escutcheon in a clockwise direction. Hand tighten only with spanner provided.

OPERATION:

To fill unit with soap unscrew the escutcheon counterclockwise and remove the pump assembly from the shank. Pour soap into the tube opening. Do not over fill in order to leave room for the pump assembly. Insert the pump assembly into the tube opening and hand tighten the escutcheon in a clockwise direction. Lock seal the escutcheon with the spanner wrench provided.

It may be necessary to hand prime the pump when first filled or when the pump has been completely emptied. This is done by pumping the unit several times while holding a finger over the spout opening on the return stroke (up stroke) only until the soap begins to discharge. This will recharge the internal pump mechanism. Note that spout has free rotation as an antivandalism feature. If fixed location is desired, slightly back out screw (item No.0332-09 on Parts List) and reassemble with screw head engaging slot in shank.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS, INC.

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE