

Markar FS102 Full Surface Flush Mount Hinge

Standard Features

Barrel Type Hinge
 .187" diameter stainless steel pin (rod)
 Medical bearings
 Aluminum end pins
Material
 6063-T6 aluminum alloy
Finishes
 Clear Anodized (628)
 Dark Bronze Anodized (313)

Standards
 ANSI/BHMA Standard A156.26 Grade 2
Mounting Hardware
 Fasteners concealed when door is closed
 $\frac{1}{4}$ -14 x $\frac{3}{4}$ " Security TORX TEK Screws
Capacity
 Supports weights up to 600lbs.
 4'0" maximum door width

Standard Sizes
 6'8", 7'0", 7'2", 8'0"
Locking Security Covers
 Brushed aluminum finish
Handing
 Not required for standard 7'0" or 8'0".
 Handing required for 6'8" and 7'0" and for most optional features listed


Optional Features

Finish
 Light Bronze Anodized (311)
 Black Anodized (315)
 Scratch-Resistant Powder Coated Paint
Fasteners
 $1\frac{5}{8}$ " aluminum sleeve bolts
 Tamper-proof security screws


Other Features
 Custom lengths - specify in inches
 Custom hole pattern
 Dutch door hinges - suffix "DDP"
 Hospital tips - suffix "HT"
 Lead lined cover with 4 lbs. lead lining - suffix "LL"

Electrical Modifications
 Electrical Transfer Access Prep - suffix ETAP
 ElectroLynx®
 EL4 (4 wire), EL8 (8 wire), EL12 (12 wire)
 PoE (9 wire)

For flush-mounted doors. This surface-mounted pin & barrel type continuous hinge is for flush-mounted doors for solving your door sag problems. This unit works well on all types of aluminum, wood and hollow metal door applications. The hinge also features tamper-resistant cover caps to prevent vandalism or break-ins.

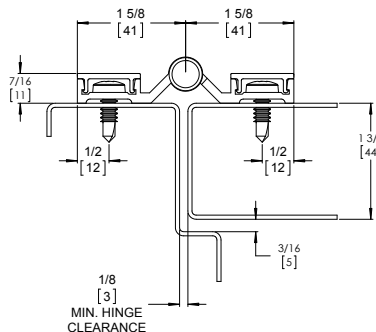

Door Closed

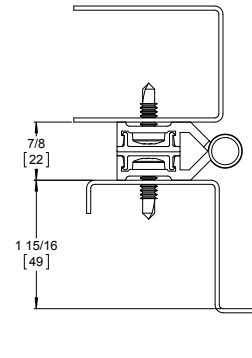

Door Open 180°

ASSA ABLOY

The global leader in
door opening solutions

800-824-3018 | www.markar.com
Check the web site for the up-to-date catalog

Copyright © 2015-2017, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.