

Markar HG105 Adjustable Hinge Guard

Standard Features

Barrel Type Hinge
.187" diameter stainless steel pin (rod)
Medical bearings
Aluminum end pins
Material
6063-T6 aluminum alloy
Finishes
Clear Anodized (628)
Dark Bronze Anodized (313)
Standards
ANSI/BHMA Standard A156.26 Grade 2


Mounting Hardware
No exposed mounting fasteners when door is closed
Custom 12-24 x $\frac{11}{16}$ " S.S Phillips Flat Head Undercut TEK Screws
Capacity
Supports weights up to 600lbs.
4'0" maximum door width
Standard Sizes
6'8", 7'0", 7'2", 8'0"

Hole Pattern
Symmetrically templated
Handing
Not required for standard 7'0" or 8'0".
Handing required for 6'8" and 7'2" and for most optional features listed

Optional Features


Finishes
Light Bronze Anodized (311)
Black Anodized (315)
Scratch-Resistant Powder Coated Paint
Other Features
Custom lengths - specify in inches
Custom hole pattern
Dutch door hinges - suffix "DDP"
Hospital tips - suffix "HT"

Fasteners
Tamper-proof security screws
Adjust-A-Screw™ for correcting frame fit problems up to $\frac{3}{8}$ "




Electrical Modifications
Current Transfer Prep - suffix "CTP"
ElectroLynx®
EL4 (4 wire), EL8 (8 wire), EL12 (12 wire)
PoE (9 wire)

This pin & barrel edge-mounted hinge can be used in conjunction with automatically operated aluminum doors that have heavy cart traffic. Ideal for both commercial and institutional doors, shipping and receiving doors, as well as storefronts where door edge protection is critical.

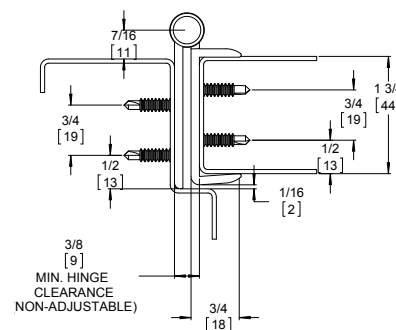

Door Closed

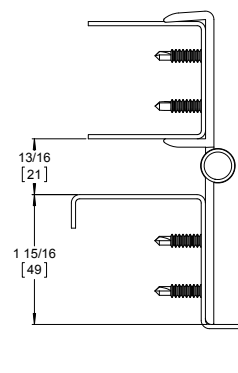

Door Open 180°