

Neoprene Bulb Seals

Properties:


- Synthetic rubber polymer blend: Chloroprene and EPDM
- Very good abrasion resistance, tensile strength and memory
- Flame resistant
- Moisture resistant
- Temperature range -20°F to 200°F
- Good resistance to ozone, sunlight and aging
- BHMA Certified to ANSI/BHMA A156.22 performance tests for Heat, Cold, Air Infiltration and Smoke Infiltration

#6 x 3/4" Stainless Steel Sheet Metal
Screws furnished
Screw holes slotted for adjustment

All neoprene seals this section



Dense Bulbs

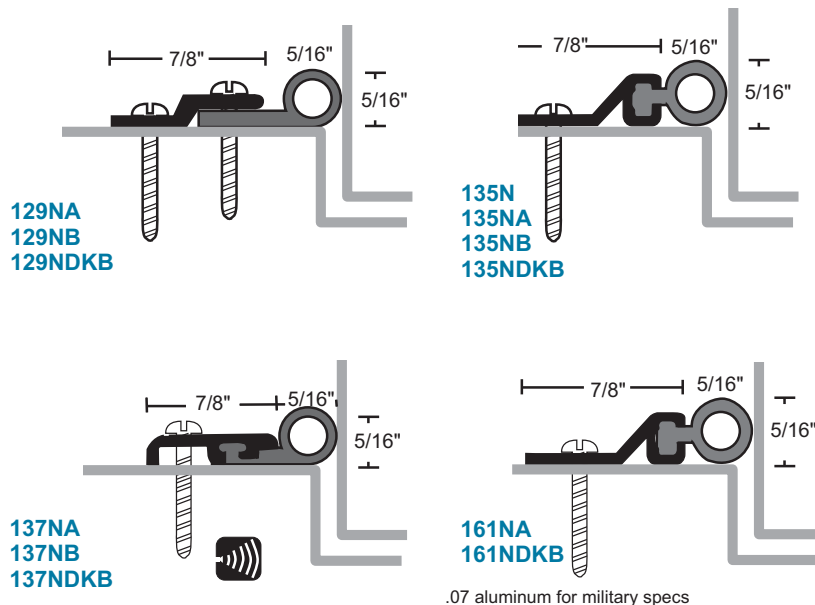


.07 aluminum for military specs

Polyurethane Seals

Properties:

- Very good abrasion resistance, tensile strength, memory and UV resistance.
- Flame resistant
- Moisture resistant
- Temperature range -65°F to 175°F


#6 x 3/4" Stainless Steel Sheet Metal
Screws furnished
Screw holes slotted for adjustment

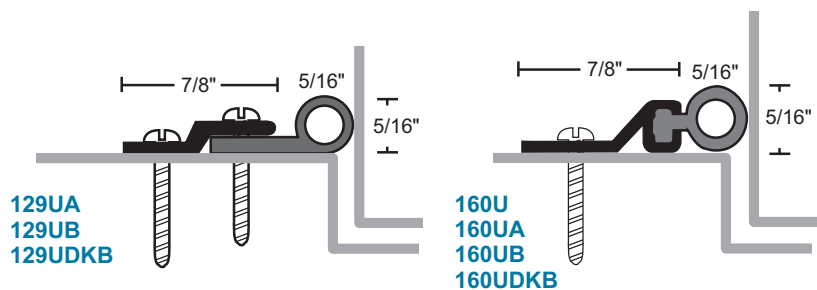

All polyurethane seals this section



A - clear anodized
B - gold
DKB - dark bronze
no suffix - mill aluminum
neoprene is black
polyurethane is black

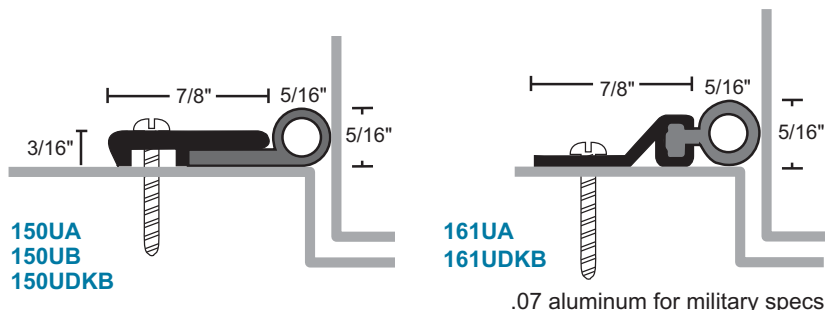

.07 aluminum for military specs



NATIONAL GUARD PRODUCTS, INC.

Phone 800-647-7874
Fax 800-255-7874

orders@ngpinc.com
quotes@ngpinc.com

www.ngp.com