



NATIONAL GUARD
PRODUCTS

Polyurethane Seal 150U




Material

Aluminum alloy 6063, T5 temper
Polyurethane is black

- Very good abrasion resistance, tensile strength, memory and UV resistance
- Flame resistant
- Moisture resistant
- Temperature range -65°F to 175°F
- #6 x 3/4" stainless steel sheet metal screws furnished
- Screw holes slotted for adjustment

Finishes

150UA Anodized Aluminum
150UB Gold
150UDKB Dark Bronze

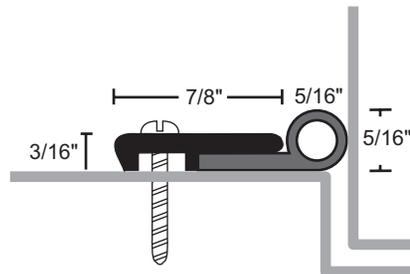

Project:

Submitted by:

Date:

Notes: