

Silicone Seals

Properties:

- Synthetic rubber polymer: Siloxane
- Excellent flexibility and memory
- Flame resistant
- Moisture resistant
- Temperature range -100°F to 500°F, remains flexible at extreme temperatures
- Excellent resistance to ozone, UV and aging
- Recommended for areas using FM200 or Halon Fire Suppression Systems
- BHMA Certified to ANSI/BHMA A156.22 performance tests for Heat, Cold, Air Infiltration and Smoke Infiltration

#6 x 3/4" Stainless Steel Sheet Metal Screws furnished
Screw holes slotted for adjustment

All silicone seals this section



A - anodized aluminum

B - gold

DKB - dark bronze


no suffix - mill aluminum

dense silicone is black

exception: 137 silicone is gray



Dense Bulbs

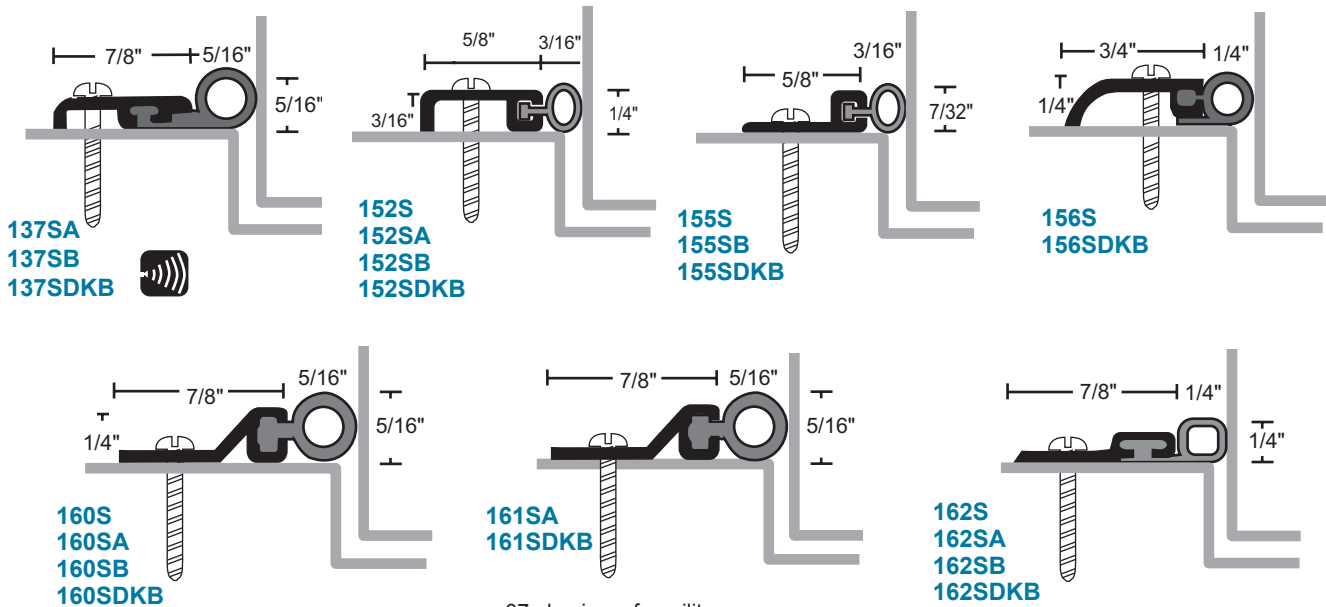


.07 aluminum for military specs

E-Lon® Foam Seals

TPE foam Core with Brown UV resistant skin

Kerf Application

Fits 1/8" wide x
7/16" deep kerf



284Q

Stock lengths: 36", 48", 96", 120"

