



Perimeter Seal Compatible with Parallel Arm Closers 700N



Material
Aluminum alloy 6063, T5 temper
Synthetic rubber polymer blend:
Chloroprene and EPDM
Neoprene is black



- Very good abrasion resistance, tensile strength and memory
- Flame resistant
- Moisture resistant
- Temperature range -20°F to 200°F
- Good resistance to ozone, sunlight and aging
- BHMA Certified to ANSI/BHMA A156.22 performance tests for heat, cold, air infiltration and smoke infiltration
- No break in seal for closer mounting
- Closer and/or overhead holder attach to frame through weatherseal section. Install seal first
- Allows mounting of rim exit device strikes without notching gasketing
- Head section not drilled
- Jamb sections furnished with slotted holes for adjustment
- Self drilling #8 (Tek type) screws furnished
- May be cut to fit narrow frame stops
- Specify "cut to width" on order

Finishes

700N	Mill Aluminum
700NA	Anodized Aluminum
700NB	Gold
700NDKB	Dark Bronze

Options

FATT - Fast Attach Tape

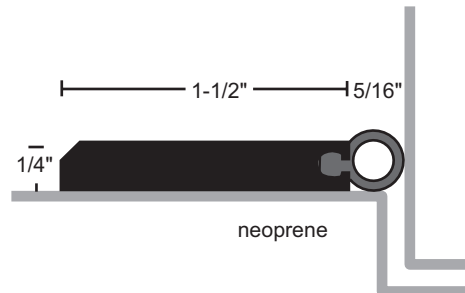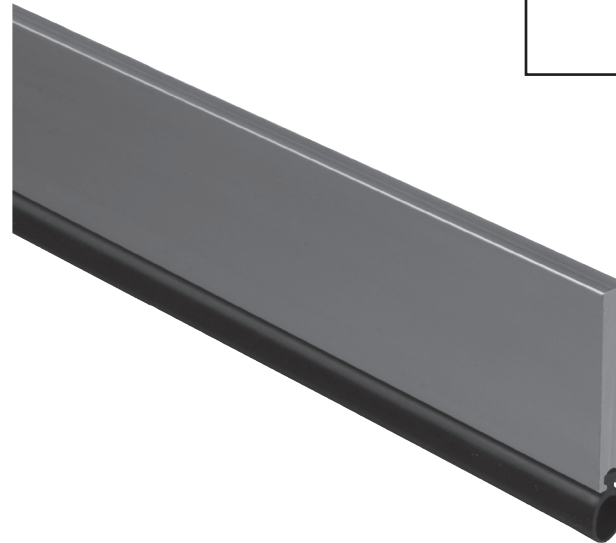

Project:
Submitted by:
Date:
Notes: