



GAP90™

Fire Door Head/Jamb Gap Solutions — Up To 90 Minutes

PRODUCT CUT SHEET

UL Certified for Head/Jamb Gaps
— Measuring over 1/8", and up to 5/16".



- 90-Minute Rated — for use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- Restricts the Passage of Smoke
- Non-Handed
- Available in 36", 48", 84" and 96" Lengths
- ⚠ An NGP Strike Shim (9275 or 9225) may also be required for Proper Latchbolt Engagement
- ⚠ A Mounting Bracket (600D-28) is recommended when using Parallel Arm Closers

GAP90™

Requires installation of ALL components:
9945, 9400, 5075CL


GAP90DKB™

Requires installation of ALL components:
9945, 9400DKB, 5075B

GAP90W™

Requires installation of ALL components:
9945, 9400W, 5075W

9945 Steel Stop Extender



- 16-Gauge, Gray Primer Finish
- Furnished with #10 X 1" TEK SMS
- Patent No.: US9,273,510B2

5075 Self-Adhesive TPE Seal




*Anti-Microbial not available in clear



5075B	BROWN
5075CL	CLEAR*
5075W	WHITE


9400 NGP-Edge® Intumescent Seal with PVC Cover

- Self-Adhesive



9400	GRAY
9400DKB	BROWN
9400W	WHITE

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

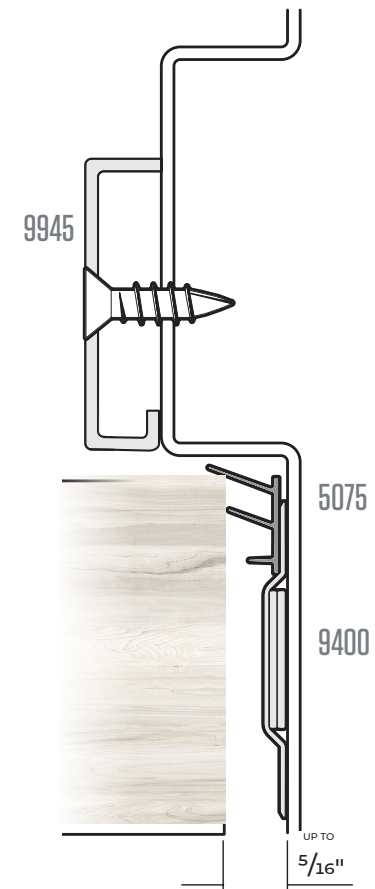

NGP-FDA-GAP90-PCS-0720-B