
▶ 300SD Plunger Lock

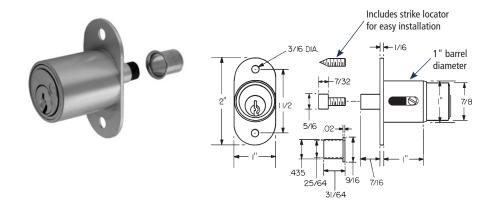

Item	Finish	Cyl. Length	Keying
300SD	26D, US3, 10B	1"	KD, KA 101,103,107,915 Custom Keyed

SPECIFICATIONS

Keying: Can be keyed together with other

N Series locks

Rekeyable: Easily rekeyable via speed-release

cylinder release mechanism
US Patent Nos: 4,920,774; 5,121,619

Standard function: Key removable in locked or unlocked position.

Body: Zinc die cast

Cylinder: Solid brass, pin tumbler

Cylinder length: 1"
Barrel diameter: 1"
Finish: 26D, US3 or 10B
Packaged: Packed 10 per box

KEYING INFORMATION

Keyway: N Series (equivalent to National D4291 4-pin or D4292 5-pin system)

Keys: Includes 2 keys per lock Stock keying: KD/KA - 4 pin standard Stock KA#: 101, 103, 107, 915 Masterkeyed: 5 pin standard Grand masterkeyed: Available Keyblank 4-pin: KBN-4-NP (equivalent to NA14, 1069L) Keyblank 5-pin: KBN-5-NP (equivalent to NA12, 1069LA)

INCLUDED ACCESSORIES

10-24 machine thread strike locator


34-9 matching thimble strike


10-24 machine thread bolt extender for varying gaps between bypassing doors

▶ 329R Showcase/Ratchet Lock



	1-5/8"—-
1/2"	-1.3 DIA
	1 1/16"





Finish

26D

Keying

Custom Keyed

KD, KA 101,103,107,915

Item

329R

SPECIFICATIONS

Keying: Can be keyed together with other N Series locks

Rekeyable: Easily rekeyable via speed-release cylinder release mechanism

US Patent No: 5,121,619

Standard function: Key removable in locked or unlocked position.

Body: Zinc die cast

Cylinder: Solid brass, pin tumbler

Strap: Nylon coated strap fits 1/4" material

Finish: 26D

Packaged: Packed 10 per box

KEYING INFORMATION

Keyway: N Series (equivalent to National D4291 4-pin or D4292 5-pin system) Keys: Includes 2 keys per lock Stock keying: KD/KA - 4 pin standard Stock KA#: 101, 103, 107, 915 Masterkeyed: 5 pin standard

Masterkeyed: 5 pin standard Grand masterkeyed: Available Keyblank 4-pin: KBN-4-NP (equivalent to NA14, 1069L)

Keyblank 5-pin: KBN-5-NP (equivalent to NA12, 1069LA)

INCLUDED ACCESSORIES

Strap for 1/4" material thickness



