



## ► 722S Plunger Lock

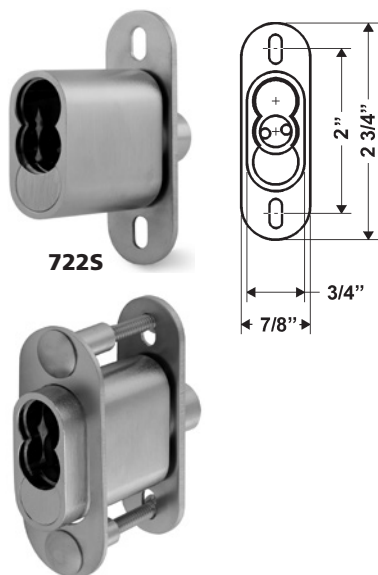

**722S-TBM**  
Through-bolt mount

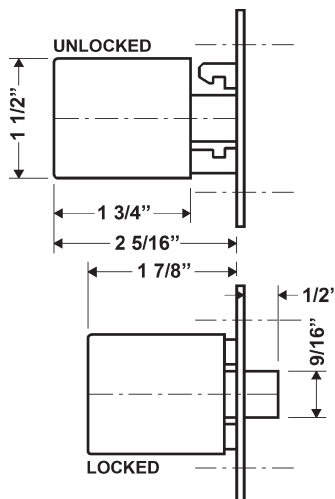

| Item        | Function      | Finish | Description                                                               |
|-------------|---------------|--------|---------------------------------------------------------------------------|
| 722S        | Standard      | 26D    | Lock body - For small format IC                                           |
| 722S-KR     | Key-retaining | 26D    |                                                                           |
| 722S-TBM    | Standard      | 26D    | Lock body - For small format IC (includes through-bolt mounting hardware) |
| 722S-TBM-KR | Key-retaining | 26D    |                                                                           |

## SPECIFICATIONS

Retrofits: Best 2S, 2S-TBM

Standard function: Key removable in locked and unlocked position.

Key-retaining function: Key removable in locked position only. Specify **-KR** for key-retaining.

TBM function: Specify TBM for "through-bolt mounting"

Body: Solid brass

Barrel length: 1-3/4"

Bolt throw: 1/2"

Max. door thickness: 1-7/8"

Min. door thickness (TBM): 5/8"

Finish: 26D

Packaged: Packed 10 per box

## KEYING INFORMATION

Cores: Not included

Accepts: Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores

Compatible electronic cylinders: Medeco Nexgen XT or VIDX CyberLock SFIC cylinders

## INCLUDED ACCESSORIES

725-1 spacer to fit 6 or 7 pin cores

Matching strike



725-PA plastic thumbturn

TBM locks include through-bolt plates and screws

## OPTIONAL ACCESSORIES

SFIC cores: 206/207 Series (page 60)

## ► 723S Sliding Door Cylinder Housing

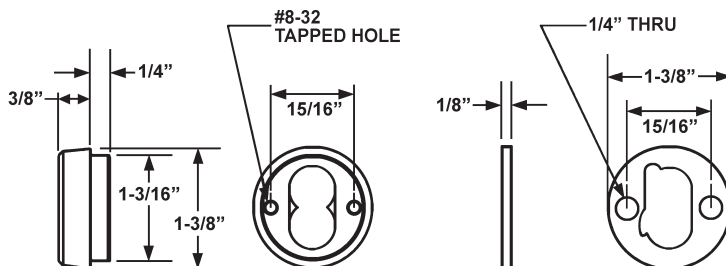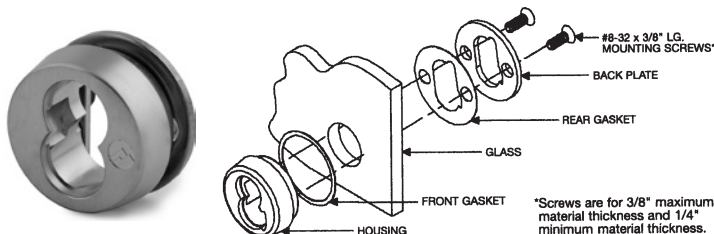

## FOR BYPASSING SLIDING GLASS DOORS

| Item                                               | Finish    | Size       | Type                          | Description                     |
|----------------------------------------------------|-----------|------------|-------------------------------|---------------------------------|
| 723S                                               | 26D, US26 | Adjustable | Sliding door cylinder housing | Lock body - For small format IC |
| <b>Note:</b> Requires use of 207S series SFIC core |           |            |                               |                                 |

## SPECIFICATIONS

Retrofits: Best 4S

Function: For use on bypassing sliding doors. Core acts as stop for interior sliding door.

Material: Zinc die cast

Finish: 26D or US26

## INCLUDED ACCESSORIES

Screws: Includes 3 sizes of screws (7/16", 3/4" and 1") to adapt lock for use on varying material thicknesses

## KEYING INFORMATION

Core: Not included, requires special core

Accepts: Best (6C or 6CP), Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores

## OPTIONAL ACCESSORIES

SFIC cores: 207S Series (page 60)

**207S Series SFIC cores**



The Olympus 723S requires use of 207S series SFIC cores (page 60)



The following warning is applicable to all parts listed on this page:  
**WARNING:** This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. for more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

