

L92V

IC: Drawer Latch Lock for Schlage Full-Size Cores



For SCHLAGE
full-size
interchangeable
core cylinders

SPECIFICATIONS

Function: Spring latch
Body: Zinc die cast
Barrel diameter: 1-1/8"
Cylinder length: 1-7/16"
Latch projection: 3/8"
Handing: Drawer Vertical
Finish: 26D or US3
Packaged: Packed 10 per box

CYLINDER INFORMATION

Cylinder: Not included
Accepts: Schlage large format/full-size IC cylinders
- Schlage Quad, Numbered Section, and Schlage Classic IC cores
- Schlage Primus® and Everest large format IC cores
- Mul-T-Lock large format IC cores
Compatible electronic cylinders: VIDEX
CyberLock LFIC cylinders

INCLUDED ACCESSORIES

10-350 spacers (qty 3)
L78ST-1-SS matching lip strike
7788-PA-D plastic thumbturn


OPTIONAL ACCESSORIES

Spacers: 10-350 (1/8" thick), 10-348 (1/4" thick),
10-349 (1/2" thick)
Trim ring: TR78
Through-bolt hardware: ETS1 trim plate, ETS1-PL
trim pull and ETST1 template

L92V

Function: Drawer latch lock

*For door applications,
place lock on side.*



Left-Hand Door

Right-Hand Door




AVAILABLE FINISHES



US26D

US3

INCLUDED ACCESSORIES



10-350 internal spacers
For a flush fit on varying
material thicknesses



Matching lip strike
L78ST-1-SS

WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



**OLYMPUS
LOCK** INC.

L92V

IC: Drawer Latch Lock for Schlage Full-Size Cores

OPTIONAL ACCESSORIES - See our website for a complete list of optional components.

Internal Plastic Spacers

- 10-350 1/8" thick plastic spacers
- 10-348 1/4" thick plastic spacers
- 10-349 1/2" thick plastic spacers

Strikes

- Metal strikes: L78ST-2

Trim Ring

- TR78 trim ring

Through-Bolt Mounting Plate

External metal 1/8" or 1/4" through-bolt plate allows for secure and attractive flush mounting of the cabinet lock face. Available in US3 or US26D finish.

- ETS1-125 through-bolt plate, 1/8" thick
- ETS1-250 through-bolt plate, 1/4" thick

Through-Bolt Mounting Plate Template

Allows for proper mounting hole placement of through-bolt plate. Can be used as a 1/8" shim spacer. Available in US3 and US26D finish.

- ETST2 through-bolt plate template

ETS1
Through-bolt plate




ETST1
Through-bolt plate template






U.S. Patent No. D490,686

ETS1-PL
Through-bolt pull



ETS1-PL
(requires use of ETS1)

DIMENSIONS | TYPICAL INSTALLATION

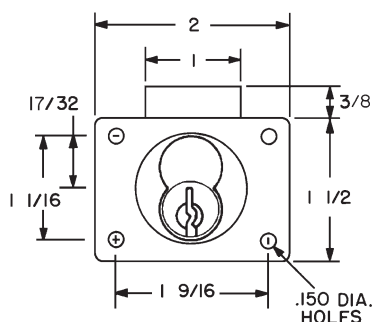

L92V - side view