

RCI Electronic Access Controls Product Catalog

Electric Strikes



RCI Electric Strikes

Strike Cross Reference

RCI		HES	Allegion/Von Duprin	Folger Adam	Adams Rite	Trine
0 Series Rim Strikes	0161	-	6112	310-4	-	EN800
	0162	9600	-	-	-	4800
	F0162	9500	6300	-	-	4800F
	0163	9400	-	-	-	4850
F1 Series Fire-Rated Centerline Strikes	F1114	7501	6211	712, 732, 712-75, 732-75	-	EN400
	F1119	-	6215	310-2	-	EN950
2 Series All-In-One Strikes	F2164/2364	1006 1006CLB	6400	742-75	-	4100
4 Series Centerline Strikes	4104/4304	5200-501A	5100	-	-	2012RD/RS
	4105/4305	-	-	-	-	-
	4107/4307	5200-503	-	-	-	-
	4108/4308	5200-502	-	-	-	-
	4114/4314	5200-501	4211	-	7170	-
	4119/4319	-	6200	-	-	-
	F4104	4500	-	-	-	-
	F4114	4500	-	-	7270	-
6 Series Centerline Strikes	S/L6504	5000-501A 5200-501A	5100	-	7101, 7160 7300, 7440	-
	S/L6505	-	-	-	-	-
	S/L6507	5000-503 5200-503	-	-	7130, 7430	-
	S/L6508	5000-502 5200-502	5100	-	7110, 7310 7410	-
	S/L6514	5200-501 5000-501	5100, 4200	-	-	2012
	S/L65U	-	5100	-	-	-
7 Series Centerline Strikes	7104/7304	5000-501A 5200-501A	5100	-	7100	2012RD
	7105/7305	-	-	-	-	-
	7107/7307	5000-503	-	-	-	2678
	7107/7108	5200-503	5100	-	7110	-
	7114/7314	5200-501	5100	-	7140	2012
	7119/7319	-	6200	-	-	-
Compact Strikes	12C	-	-	-	-	323478LC

RCI Electric Strikes

0 Series

0161 3/4" Semi-Mortise Rim Strikes

Semi-mortise rim strike designed for use with Pullman latch rim exit devices.

1-3/4"W x 9"H x 1-5/8"D (45mm x 229mm x 41mm)

	Energy 200mA ¹ 12VAC/VDC Or 24VAC/VDC		Strength 1,500lbf Static 70ft-lb Dynamic
	Warranty 3 Year Limited Warranty		Mode Fail-Secure
	Endurance 500,000 Cycles		

¹Max at 12VDC

- Semi-mortise rim strike designed for use with Pullman latch rim exit devices
- Accommodates 1/2" to 3/4" (13mm–19mm) latch projection
- Ensures proper latch alignment with horizontal adjustment
- Stainless steel ensures superior strength and creates a sleek aesthetic design
- Lockdown holes for secure mount
- Non-handed
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed



How To Order

0161	-		x	32D
		05		-12VAC/VDC
		08		-24VAC/VDC
Voltage				

Example: **0161 - 05 x 32D**

Accessories

Model	Description
0161DDH	Double door housing, SPC ² finish

NOTE: UL 1034 Burglary-resistant listing does not apply with use of 0161DDH.

²SPC=Silver Powder Coat



RCI Electric Strikes



0 Series

0162 3/4" Rim Strikes

Completely surface-mounted rim strike designed for use with Pullman latch rim exit devices.

1-3/4"W x 9"H x 3/4"D (45mm x 229mm x 20mm)



Energy
500mA¹
Field-Selectable
12/24VDC & 12-24VAC



Strength
1,500lbf Static
70ft-lb Dynamic



Warranty
5 Year Limited Warranty



Mode
Fail-Secure



Endurance
500,000 Cycles
(standard)



Fire-Rated
Optional 3-Hour
Model Available²



Latch Monitor
Optional Latch Monitor
Model Available

¹Max at 12VDC


²Fire-rated (F) model only

- Completely surface-mounted – no frame cutting required
- Accommodates 1/2" to 3/4" (13mm–19mm) latch projection
- Stainless steel ensures superior strength and creates a sleek aesthetic design
- Horizontal adjustment ensure proper latch positioning to compensate for door misalignment – up to 1/4" (6.4mm)
- Conventional keeper design (one moving part)- promotes even load distribution
- Plug-in wire connectors
- Lockdown holes for secure mount
- HEX socket head cap screws for added support
- Installation tool included (HEX key)
- Non-handed (featuring horizontal solenoid design)
- 1/16" (1.5mm) mounting spacers for additional latch engagement included
- Brushed Stainless Steel (32D) finish
- Factory tested to over 4-million cycles of operation
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles (R01629 & RF01629)
- UL 294 Listed for Access Control Unit Accessory (6th Edition)
- UL 1034 burglary-resistant Listed
- UL 10C, 3-hour fire-rating Listed²
- CAN/ULC S104, 3-hour fire-rating Listed²
- California State Fire Marshal Listed (CSFM: 3776-2275:0501)²
- Patent #: US 7,722,097
- Patent #: Canadian 2,597,916



Options


- LM – Latch monitor
- F – 3-hour fire-rating Listed



Conventional Keeper
(One Moving Part)



Lockdown Holes
For Secure Mount



Latch Monitor
(0162LM Model)

How To Order

Options

F	-Fire-Rated
0162	x 32D
LM	-Latch Monitor

Options

Example: **F0162LM x 32D**

Accessories

Model	Description
0162DDH	Double door housing, SPC ³ finish
0162MSK	1/16" (1.5mm) mounting spacers

NOTE: UL 1034 Burglary-resistant listing and fire-rating do not apply with use of 0162DDH. ³SPC=Silver Powder Coat

RCI Electric Strikes

0 Series

0163 1/2" Rim Strikes

Slim, adjustable design ideal for tight-fitting installations.

Designed for use with Pullman latch rim exit devices.

1-3/4"W x 9"H x 1/2"D (45mm x 229mm x 13mm)

	Energy 270mA ¹ 11-16VAC 12VAC/VDC Or 24VAC/VDC		Strength 1,500lbf Static 70ft-lb Dynamic
	Warranty 5 Year Limited Warranty		Mode Fail-Secure
	Endurance 500,000 Cycles		Latch Monitor Optional Latch Monitor Model Available

¹Max at 12VDC

- Designed to fit in tight situations where the exit device is mounted very close to the door frame, e.g. aluminum storefront applications.
- For maximum latch engagement, the strike keeper has been designed to pivot out of the strike body versus rolling out of the strike.
- Accommodates 1/2" to 3/4" (13 mm–19 mm) latch projection.
- Horizontal adjustment ensures proper latch positioning to compensate for door misalignment – up to 1/4" (6.4 mm).
- Solenoid technology.
- Shim may be added to the strike cavity to engage with misaligned deadlatch.
- Lockdown holes for secure mount.
- Cooler operation – runs cool to the touch; no suppressor kit needed.
- High-grade stainless steel ensures superior strength and creates a sleek aesthetic.
- 1/16" (1.5mm) mounting spacer included
- Non-handed.
- Plug-in wire connectors.
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles (0163 & 0163LM)
- UL294 Listed for Access Control Unit Accessory (6th Edition).
- UL1034 burglary-resistant Listed.
- Patents pending.



How To Order

0163 x 32D
LM – Latch Monitor

Example: **0163LM x 32D**

Options

- LM – Latch monitor

Accessories

Model	Description
0162DDH	Double door housing, SPC ² finish

NOTE: UL 1034 Burglary-resistant listing does not apply with use of 0162DDH.

²SPC=Silver Powder Coat



RCI Electric Strikes



F1 Series F1114 Centerline Strikes

Features stainless steel faceplate with square corners ideal for hollow metal frames.

Faceplate: 1-1/4"W x 4-7/8"H (32mm x 124mm)

Insert Depth: 1-3/4" (45mm)

F1 Series F1119 Centerline Strikes

Features stainless steel faceplate with square corners ideal for aluminum and wood frames.

Faceplate: 1-3/8"W x 9"H (34mm x 229mm)

Insert Depth: 1-3/4"D (45mm)



Energy
200mA¹
11-16VAC,
12VAC/VDC
Or 24VAC/VDC



Strength
1,500lbf Static
70ft-lb Dynamic



Warranty
5 Year Limited Warranty



Mode
Fail-Secure



Fire-Rated
CAN/ULC S104
UL 10C 1-1/2-Hour



Endurance
500,000 Cycles

¹Max at 12VDC

- Stainless steel faceplate with square corners
- Accommodates 1/2" (12.7mm), 5/8" (16mm) or 3/4" (19mm) latch projection
- Up to 1/4" (6.4mm) horizontal adjustment, relieves side-load pressure, ensuring proper latch alignment
- Saddle-mount housing design for enhanced strength and durability
- Tamper-resistant pry-guard concealed inside the frame
- Energy efficient coil design
- Mounting tabs, shims and fasteners included
- Non-handed
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed
- UL 10C, 1-1/2 hour fire-rating Listed
- CAN/ULC S104, 1-1/2 hour fire-rating Listed
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles

How To Order

Faceplate

						14	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Square Corner
						19	-1-3/8"W x 9"H (34mm x 229mm), Square Corner
F1	1		-		x	32D	
					01	-11-16VAC	
					05	-12VAC/ VDC	
					08	-24VAC/ VDC	

Voltage

Example: **F1119-01 x 32D**



RCI Electric Strikes

2 Series

F2164/2364

All-In-One Strikes

Versatile design features adjustable deadbolt keeper and deadlatch ramp allowing it to work with most locks.

Faceplate: 1-1/4"W x 4-7/8"H (32mm x 124mm)

Insert Depth: 1-3/4"D (45mm)


	Energy 375mA ¹ Field-Selectable 12/24VDC, 12-24VAC ²		Strength 1,500lbf Static 70ft-lb Dynamic
	Warranty 5 Year Limited Warranty		Mode Fail-Secure & Fail-Safe
	Endurance 500,000 Cycles		Latch Monitor Plug-In Latch Monitor Accessory Available
	Fire-Rated Optional 3-Hour Model Available ³		

¹Max at 12VDC

²12-24VAC not available with 2364 model

³Fire-rated (F) model only, 3-hour for single swing, 90-minutes for standard pair of doors

- Versatile strike designed to work with most locks
- Accommodates 1/2" (12.7mm) to 3/4" (19mm) latch projection
- Adjustable deadbolt keeper and deadlatch ramp
- Accommodates up to 1" deadbolt (night-latch function only, bolt will not release)
- Plug-in wire connectors
- Runs cool – solenoid design prevents keeper from heating up
- Trim plate included to cover up irregular frame cut-out
- Stainless steel ensures superior strength and creates a sleek aesthetic
- Includes two keeper shims – 1/16" (1.5mm) and 1/8" (3mm) – for horizontal adjustment for misaligned frames (unique sliding design)
- Non-handed
- Factory tested to over 2-million cycles of operation
- Brushed Stainless Steel (32D) finish
- UL 294 Listed for Access Control Unit Accessory (6th Edition)
- UL 1034 burglary-resistant Listed
- UL 10C, 3-hour fire-rating Listed³
- CAN/ULC S104, 3-hour fire-rating Listed³
- California State Fire Marshal Listed (CSFM: 3776-2275:0502)³
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles
- Patent #: US 9,580,935
- Patent #: Canadian 2,850,072



Saw-Tooth
Adjustment Locator¹



Deadbolt Plug

Accessories

Model	Description
F2LM	Latch monitor plug-in kit (2A @ 24VDC)
2FP	Filler plate (for use when replacing discontinued 2 Series models)
F2-19	Centerline faceplate, 1-3/8"W x 9"H (35mm x 229mm), 32D finish
F2-29	Offset faceplate, 1-3/8"W x 9"H (35mm x 229mm), 32D finish
SMT-01	Strike marking template kit
940-LG	High profile latch guard, 32D finish

Options

- F – 3-hour fire-rating Listed

How To Order

Options			
F	-Fire-Rated ⁴		
2		64	x 32D
	1	-Fail-Secure	
	3	-Fail-Safe	
Mode			

Example: **F2164 x 32D**

⁴Available in fail-secure mode only.

RCI Electric Strikes



4 Series

Centerline Strikes

Accommodates 3/4" (19mm) latch projection. Various faceplate options available to accommodate most frame types.
Insert Depth: 1-1/2"D (38mm)

	Energy 200mA ¹ (see How to Order chart below)		Strength 1,500lbf Static ² 70ft-lb Dynamic
	Warranty 3 Year Limited Warranty		Mode Fail-Secure & Fail-Safe
	Endurance 500,000 Cycles ³		Fire-Rated Optional 1-1/2-Hour Models Available ⁴

¹At 12VDC

²1,500lbf Static for fire-rated models, 1,000lbf for non-fire-rated 04 & 14 faceplates, 500lbf for 05, 07, 08 & 19 faceplates.

³Fire-rated (F) models only, 250,000 for other models

⁴Fire-rated (F) models only available in fail-secure mode with 04 & 14 faceplates.

- Accommodates 3/4" (19mm) latch projection
- 1-1/2" (38mm) cut-out depth accommodates most door frame material types
- Use with wide range of door thicknesses, 1-3/8" to 2-3/8" (35mm-60mm)
- Standard mounting tabs and fasteners included
- Non-handed
- Trim plate included to cover up irregular frame cutout
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed
- UL 10C, 1-1/2-hour fire-rating Listed⁴
- CAN/ULC S104, 1-1/2-hour fire-rating Listed⁴
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles³ (F4 models only)

How To Order

Options		Fire-Rated ⁴		Faceplate		Voltage	
						Fail-Secure	Fail-Safe
F		4			-	11-16VAC-	01
						12VAC/VDC-	05
						24VAC/VDC-	08
						12VDC-	06
						24VDC	09
						x	32D
Mode	Fail-Secure	1	04	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Radius Corner			
	Fail-Safe	3	05	-1-1/8"W x 5-7/8"H (29mm x 150mm), Radius Corner			
			07	-1-1/4"W x 6-7/8"H (32mm x 175mm), Radius Corner			
			08	-1-7/16"W x 7-15/16"(37mm x 202mm), Radius Corner			
			14	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Square Corners			
			19	-1-3/8"W x 9"H (34mm x 228mm), Square Corners			

Example: **F4104-05 x 32D**



Options

- F - 1-1/2-hour fire-rating Listed

Accessories

Model	Description
4/7JIG	Standard profile frame prep jig, aluminum
LEK01	1" lip extension kit for retrofit applications, black finish
LEK02	2" lip extension kit for retrofit applications, black finish
LEK03	3" lip extension kit for retrofit applications, black finish (not available for F4)
SMT-01	Strike marketing template kit, aluminum
TP-47-5PK	Trim plates, 5 pack, black finish
930-LG	Standard profile latch guard, 32D finish

RCI Electric Strikes

6 Series

Centerline Strikes

Two profiles available to accommodate different latch projections.

Various faceplate options available to accommodate most frame types.

Standard Insert Depth: 1-3/16" D (30mm)

Low Profile Insert Depth: 1-1/16" (27mm)

	Energy 375mA ¹ Field-Selectable 12/24VDC, 12-24VAC		Strength 1,500lb Static ² 70ft-lb Dynamic
	Warranty 3 Year Limited Warranty		Mode Field-Selectable Fail-Secure & Fail-Safe
	Endurance 500,000 Cycles ²		Monitoring Optional Latch & Keeper Monitor Models Available

¹At 12VDC

²Grade 1, 04 & 14 faceplates only. Grade 2, 1,000lb static for 05, 07 & 08 faceplates.

- Standard profile accommodates 3/4" (19mm) and Low-profile accommodates 1/2" (12.7mm) or 5/8" (16mm) latch projections
- 1/4" (6.4mm) horizontal adjustment
- Plug-in wire connectors
- Trim plate included to cover up irregular frame cut-out
- Non-handed
- Brushed Stainless Steel (32D)
- Factory tested to over 1-million cycles of operation
- UL 294 Listed for Access Control Unit Accessory (6th Edition)
- UL 1034 burglary-resistant Listed
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles²
- Patent #: US 6,874,830 and 7,144,053
- Patent #: Canadian 2,405,642



Options

- LMKM – Latch and keeper monitor

How To Order

		Options	
Latch And Keeper Monitor-		LMKM	
		65	x 32D
Standard-	S	04	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Radius Corners
Low Profile-	L	05	-1-1/8"W x 5-7/8"H (29mm x 150mm), Radius Corners
Profile		07	-1-1/4"W x 6-7/8"H (32mm x 175mm), Radius Corners
		08	-1-7/16"W x 7-15/16" (37mm x 202mm), Radius Corners
		14	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Square Corners
		U	-Universal, Includes 3 Faceplates (04, 08 & 14)
		Faceplate	


Example: **L6507LMKM x 32D**



Accessories

Model	Description
S6JIG	Standard profile frame prep jig, aluminum (for S6504 and S6514)
L6JIG	Low profile frame prep jig, aluminum (for L6504 and L6514)
LEKS601	1" lip extension kit for retrofit applications, black finish (for Standard profile)
LEKS602	2" lip extension kit for retrofit applications, black finish (for Standard profile)
LEKS603	3" lip extension kit for retrofit applications, black finish (for Standard profile)
LEKL601	1" lip extension kit for retrofit applications, black finish (for Low profile)
LEKL602	2" lip extension kit for retrofit applications, black finish (for Low profile)
LEKL603	3" lip extension kit for retrofit applications, black finish (for Low profile)
S/L6504DD	Lip bracket and radius faceplate for aluminum double doors with flat astragal (for S/L6504)
S/L6507DD	Lip bracket and radius faceplate for aluminum double doors with flat astragal (for S/L6507)
SMT-01	Strike marketing template kit, aluminum
TP-S6-5PK	Trim plates, 5 pack, black finish (for Standard profile)
TP-L6-5PK	Trim plates, 5 pack, black finish (for Low profile)
940-LG	High profile latch guard, 32D finish

RCI Electric Strikes

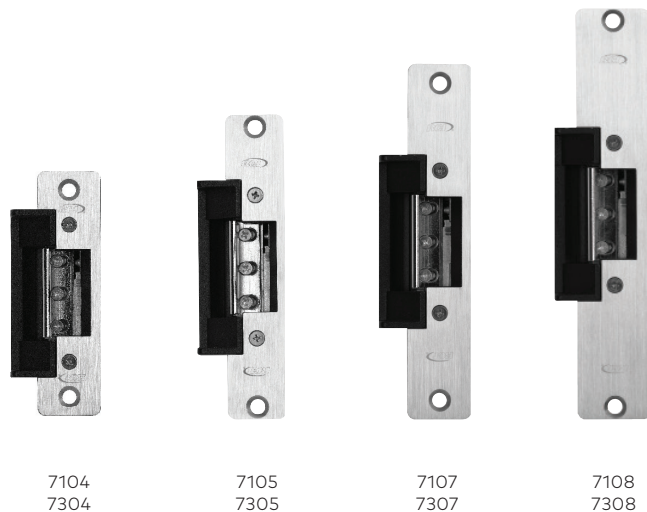

How To Order

			Voltage	
	Fail-Secure		11-16VAC-	01
			12VDC-	05D
			24VAC-	07
			24VDC-	08D
	Fail-Safe		12VDC-	06
			24VDC-	09
7			-	x 32D
Fail-Secure-	1	04	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI radius corners	
Fail-Safe-	3	05	-1-1/8"W x 5-7/8"H (29mm x 150mm), radius corners	
Mode		07	-1-1/4"W x 6-7/8"H (32mm x 175mm), radius corners	
		08	-1-7/16"W x 7-15/16"H (37mm x 202mm), radius corners	
		14	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI square corners	
		19	-1-3/8"W x 9"H (34mm x 229mm), square corners	
Faceplate				

Example: **7104-05D x 32D**

7 Series

Centerline Strikes

Accommodates 5/8" (16mm) latch projection. Various faceplate options available to accommodate most frame types.
Insert Depth: 1-1/2" D (38mm)



Energy
280mA¹
(see How to Order
chart below)



Strength
500lbf Static
70ft-lb Dynamic



Warranty
3 Year Limited
Warranty



Mode
Fail-Secure &
Fail-Safe



Endurance
250,000 Cycles

¹At 12VDC

Voltage for fail safe 240mA (73) models: 12VDC (06); 24VDC (09)

- Accommodates 5/8" (16mm) latch projection
- 1/8" (3.2mm) horizontal adjustment
- 1-1/2" (38mm) cut-out depth
- Use with wide range of door thicknesses 1-3/8" to 2-3/8" (35mm-60mm)
- Mounting tabs, fasteners and trim plate included
- Non-handed
- Trim plate included to cover up irregular frame cutout
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed



Accessories

Model	Description
4/7JIG	Standard profile frame prep jig, aluminum
LEK01	1" lip extension kit for retrofit applications, black finish
LEK02	2" lip extension kit for retrofit applications, black finish
LEK03	3" lip extension kit for retrofit applications, black finish
SMT-01	Strike marketing template kit, aluminum
TP-47-5PK	Trim plates, 5 pack, black finish
930-LG	Standard profile latch guard, 32D finish

RCI Electric Strikes



12C Compact Strike

A versatile strike suitable for all types of door frames.
1-13/16"W x 2-3/4"H x 1-1/8"D (46mm x 70mm x 28mm)



Energy
90mA
12VDC



Strength¹
1,100lbf Static
44ft-lb Dynamic



Warranty
1 Year Limited Warranty



Mode
Fail-Secure

¹Internal testing

- Quick and easy to install
- Ideal for wooden, steel & aluminum frames
- Non-handed
- Versatile, compact design
- Replaces standard, non-electrified T-strikes
- Maintains integrity and strength of the door frame
- Brushed Chrome (26D)

How To Order

12C x 26D



VR165 Vertical Rod Strike

Accommodates 5/8" (16mm) roller latch. Designed for use with vertical rod exit devices with roller latch.



Energy
450mA¹
Field-Selectable
12/24VDC & 12-24VAC



Strength
1,500lbf Static
70 Dynamic ft-lb



Warranty
5 Year Limited Warranty



Mode
Fail-Secure



Endurance
250,000 Cycles

¹Max at 12VDC

- Accommodates 5/8" (16mm) roller latch
- Heavy-duty, surface mounted strike
- High grade stainless steel ensures superior keeper strength
- Ensure proper latch alignment – up to 1/4" (6.4mm) adjustment to compensate for door and frame misalignments
- Door stop adjustment for different rail thicknesses
- Horizontal solenoid prevents manipulation from vibration
- Conventional keeper design (one moving part) - promotes even load distribution
- Lockdown tabs for secure mount
- Non-handed
- HEX socket head cap screws for added support and tamper-resistance
- Plug-in wire connector
- Installation tool included (HEX key)
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed
- UL 294 Listed for access Control Unit Accessory (6th Edition)
- Patent #: US 7,722,097
- Patent #: Canadian 2,597,916

How To Order

VR165 x 32D

Example: VR165 x 32D





VR166 Vertical Rod Strike

Surface mounted vertical rod strike for Pullman latch.

Simple locking solution for surface vertical rod exit devices having a Pullman style latch.

	Energy 210mA Field-Selectable 12/24VDC, 12-24VAC		Strength 1,500lbf Static 70ft-lb Dynamic
	Warranty 5 Year Limited Warranty		Mode Fail-Secure
	Endurance 250,000 Cycles		Monitoring Latch Monitor & Keeper Monitor Accessory Available

¹Max at 12VDC

- A small footprint vertical rod strike to be used in single or double-door applications.
- This simple design requires a 63 mm x 33 mm cut-out in the frame.
- Total footprint of the strike does not exceed 104 mm x 50 mm x 16 mm.
- Horizontal adjustability of 8 mm for frame and door variations.
- Solenoid activated.
- Designed and suited to a minimum 52 mm (2-1/16") backset of the top latch.
- UL294 Listed for Access Control Unit Accessory (6th Edition).
- UL1034 burglary-resistant Listed.

How To Order

VR166	x	32D
	x	LMKM

Example: **VR166 x 32D**



RCI Electric Strikes




4 Series

Modular Strike Inserts

Includes Lip Bracket & Hardware Pack

How To Order

		Voltage	
Fail-Secure	11-16VAC-	01	
	12VAC/VDC-	05	
	24VAC/VDC-	08	
Fail-Safe	12VDC-	06	
	24VDC-	09	
A	4		-
	1	-Fail-Secure	
	3	-Fail-Safe	
		Mode	
Example: A41-05			

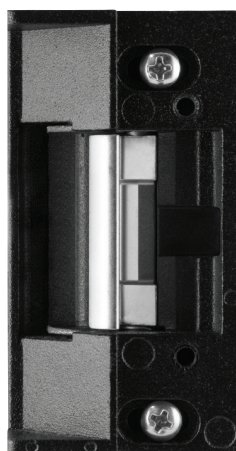

6 Series

Modular Strike Inserts

Includes Lip Bracket & Hardware Pack

How To Order

				Options
A		65	LMKM	-Latch And Keeper Monitor
	S			
	L			



7 Series


Modular Strike Inserts

Includes Lip Bracket & Hardware Pack

How To Order

		Voltage	
Fail-Safe	Secure	11-16VAC	01
		12VDC	05D
		24VAC	07
		24VDC	08D
		12VDC	06
		24VDC	09
A	7		-
	1	-Fail-Secure	
	3	-Fail-Safe	
		Mode	
Example: A71-05D			

RCI Electric Strikes

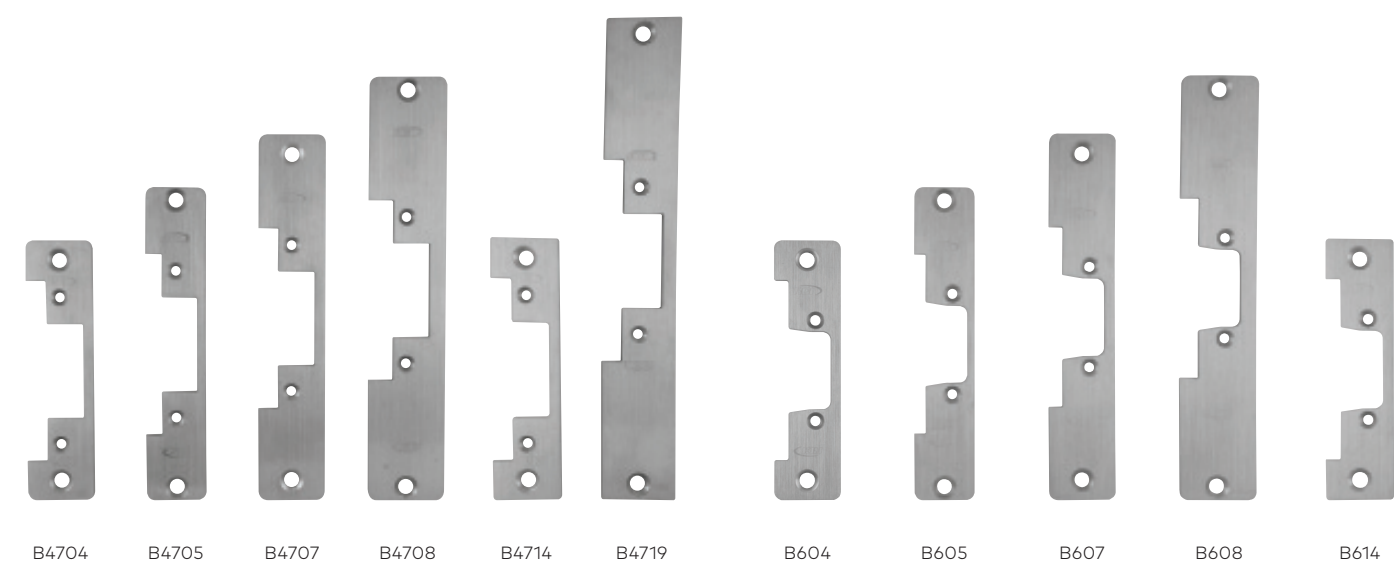

4/7 Series

Modular Strike Faceplates

6 Series

Modular Strike Faceplates

How To Order

Series	
6	-6 Series
47	-4 & 7 Series
B	- 32D
	04 -1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Radius Corner
	05 -1-1/8"W x 5-7/8"H (29mm x 150mm), Radius Corners
	07 -1-1/4"W x 6-7/8"H (32mm x 175mm), Radius Corners
	08 -1-7/16"W x 7-15/16"(37mm x 202mm), Radius Corners
	14 -1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Square Corners
	19 -1-3/8"W x 9"H (34mm x 229mm), Square Corners ¹

Faceplate

Example: **B4707-32D**
¹Only available with 4 & 7 series

RCI Electric Strikes Accessories



Double Door Housing

Ideal for double door applications with no center mullion. Door housing is mounted on the inactive door

Model	Description	Finish	Compatible with
0161DDH	Double door housing for 0161	SPC ¹	0161
0162DDH	Double door housing for 0162, 0163	SPC ¹	0162, 0163
0162DDHS	Double door housing for 0563	SPC ¹	0563

¹SPC = Silver Powder Coat



Frame Prep Jigs

Aids in cutting of aluminum or metal frames, improving accuracy.

Model	Description	Finish	Compatible with
4/7JIG	Frame prep jig for ANSI-sized electric strike	Aluminum	4104/4304, 4114/4314, 7104/7304, 7114/7314
S6JIG	Standard profile frame prep jig	Aluminum	S6504, S6514
L6JIG	Low profile frame prep jig	Aluminum	L6504, L6514



Ice Pack

Heat reducer for continuous duty electric strikes. Operating voltage – 12 to 30VDC.


Model	Description / Dimensions	Compatible with
ICEPK	Heat reducer for continuous duty electric strikes	0/F1/2/4/6/7 Series



Mounting Spacer Kits

Ideal for increasing latch depth.

Model	Description	Compatible with
0162MSK	1/16" mounting spacer for additional latch engagement	0162



Latch Guards

Added tamper-resistance for perimeter doors. Helps guard the latch from a prying attack. Designed with radius cut for easy installation around lockset roses.

Model	Description	Finish	Compatible with
930-LG	Standard profile latch guard	32D	4/7 Series
940-LG	High profile latch guard	32D	F2/6/F1 Series



Lip Bracket Extension

Ideal for center-hung doors. Allows electric strike to be installed in frame and protects frame from damage.

Model	Description / Dimensions	Finish	Compatible with
LEK01	1" Lip extension kit for retrofit	Black	4/7 Series
LEK02	2" Lip extension kit for retrofit	Black	4/7 Series
LEK03	3" Lip extension kit for retrofit	Black	4/7 Series
LEKS601	1" Lip extension kit for retrofit (standard)	Black	S6 Series
LEKS602	2" Lip extension kit for retrofit (standard)	Black	S6 Series
LEKS603	3" Lip extension kit for retrofit (standard)	Black	S6 Series
LEKL601	1" Lip extension kit for retrofit (low profile)	Black	L6 Series
LEKL602	2" Lip extension kit for retrofit (low profile)	Black	L6 Series
LEKL603	3" Lip extension kit for retrofit (low profile)	Black	L6 Series



Security Hardware Packs

Model	Description	Compatible with
2SERIESHWK	Includes screws, bit, mounting tabs, allen key, shims, connetor, deadbolt bracket and plug.	2 Series

RCI Electric Strikes Accessories



Strike Marking Template Kit

Ideal for accurately guiding prepping of the frame for the installation.

Model	Description	Finish	Compatible with
SMT-01	Strike Marking Template Kit	Aluminum	F2/4/6/7 Series



2 Series Plug-In Latch Monitor

Latch monitor plug-in kit (2A @ 24VDC).

Model	Description	Compatible with
F2LM	Plug-in latch monitor kit (2A @ 24VDC). Improved design to accommodate 1/2" - 3/4" latch throw	F2164



Trim Plates

Ideal for concealing any imperfections caused while prepping the frame cut out.

Model	Description	Finish	Compatible with
TP-47-5PK	Trim Plate - 5 Pack	Black	4/7 Series
TP-L6-5PK	Low profile Trim Plate - 5 Pack	Black	L6 Series
TP-S6-5PK	Standard profile Trim Plate - 5 Pack	Black	S6 Series



2 Series Filler Plate

Filler plate (for use when replacing discontinued 2 Series models).

Model	Description	Compatible with
2FP	Filler plate for use when replacing discontinued 2 Series models	F2164/2364



6 Series Lip Bracket & Aluminum Faceplates

Model	Description	Compatible with
S6504DD	Lip bracket and aluminum faceplate for double doors with astragal (for S6504)	S6504
L6504DD	Lip bracket and aluminum faceplate for double doors with astragal (for L6504)	L6504
S6507DD	Lip bracket and aluminum faceplate for double doors with astragal (for S6507)	S6507
L6507DD	Lip bracket and aluminum faceplate for double doors with astragal (for L6507)	L6507

RCI Electric Strikes

Frame & Lock Type Reference Guide

		Frame Type			Lock Type				
									
		Wood	Aluminum	Hollow Metal	Mortise Exit Device	Pullman Latch	Centerline Cylindrical	Offset Mortise	Narrowline Aluminum
0 Series Rim Strikes	0161	•	•	•	-	•	-	-	-
	0162	•	•	•	-	•	-	-	-
	F0162	•	•	•	-	•	-	-	-
	0163	•	•	•	-	•	-	-	-
F1 Series Fire-Rated Centerline Strikes	F1114	-	•	•	-	-	•	-	-
	F1119	•	•	•	-	-	•	-	-
2 Series All-In-One Strikes	F2164/2364	•	-	•	•	-	•	•	-
	4104/4304	-	•	-	-	-	•	-	-
4 Series Centerline Strikes	4105/4305	•	•	•	-	-	•	-	-
	4107/4307	•	•	•	-	-	•	-	-
	4108/4308	•	•	•	-	-	•	-	-
	4114/4314	-	-	•	-	-	•	-	-
	4119/4319	•	•	•	-	-	•	-	-
	F4104	-	•	-	-	-	•	-	-
	F4114	-	-	•	-	-	•	-	-
	S6504	-	•	-	-	-	•	-	-
6 Series Centerline Strikes	L6504	-	•	-	-	-	•	-	•
	S6505	•	•	•	-	-	•	-	-
	L6505	•	•	•	-	-	•	-	•
	S6507	•	•	•	-	-	•	-	-
	L6507	•	•	•	-	-	•	-	•
	S6508	•	•	•	-	-	•	-	-
	L6508	•	•	•	-	-	•	-	•
	S6514	-	-	•	-	-	•	-	-
	L6514	-	-	•	-	-	•	-	•
	S65U	•	•	•	-	-	•	-	-
	L65U	•	•	•	-	-	•	-	•
	7104/7304	-	•	-	-	-	•	-	•
7 Series Centerline Strikes	7105/7305	•	•	•	-	-	•	-	•
	7107/7307	•	•	•	-	-	•	-	•
	7108/7308	•	•	•	-	-	•	-	•
	7114/7314	-	-	•	-	-	•	-	•
	7119/7319	•	•	•	-	-	•	-	•
Compact Strikes	12C	•	-	•	-	-	•	-	-

dormakaba Canada Inc.
65 Struck Court
Cambridge, ON Canada N1R 8L2
Tel: 800-265-6630
sales_RCI@dormakaba.com

www.dormakaba.us